

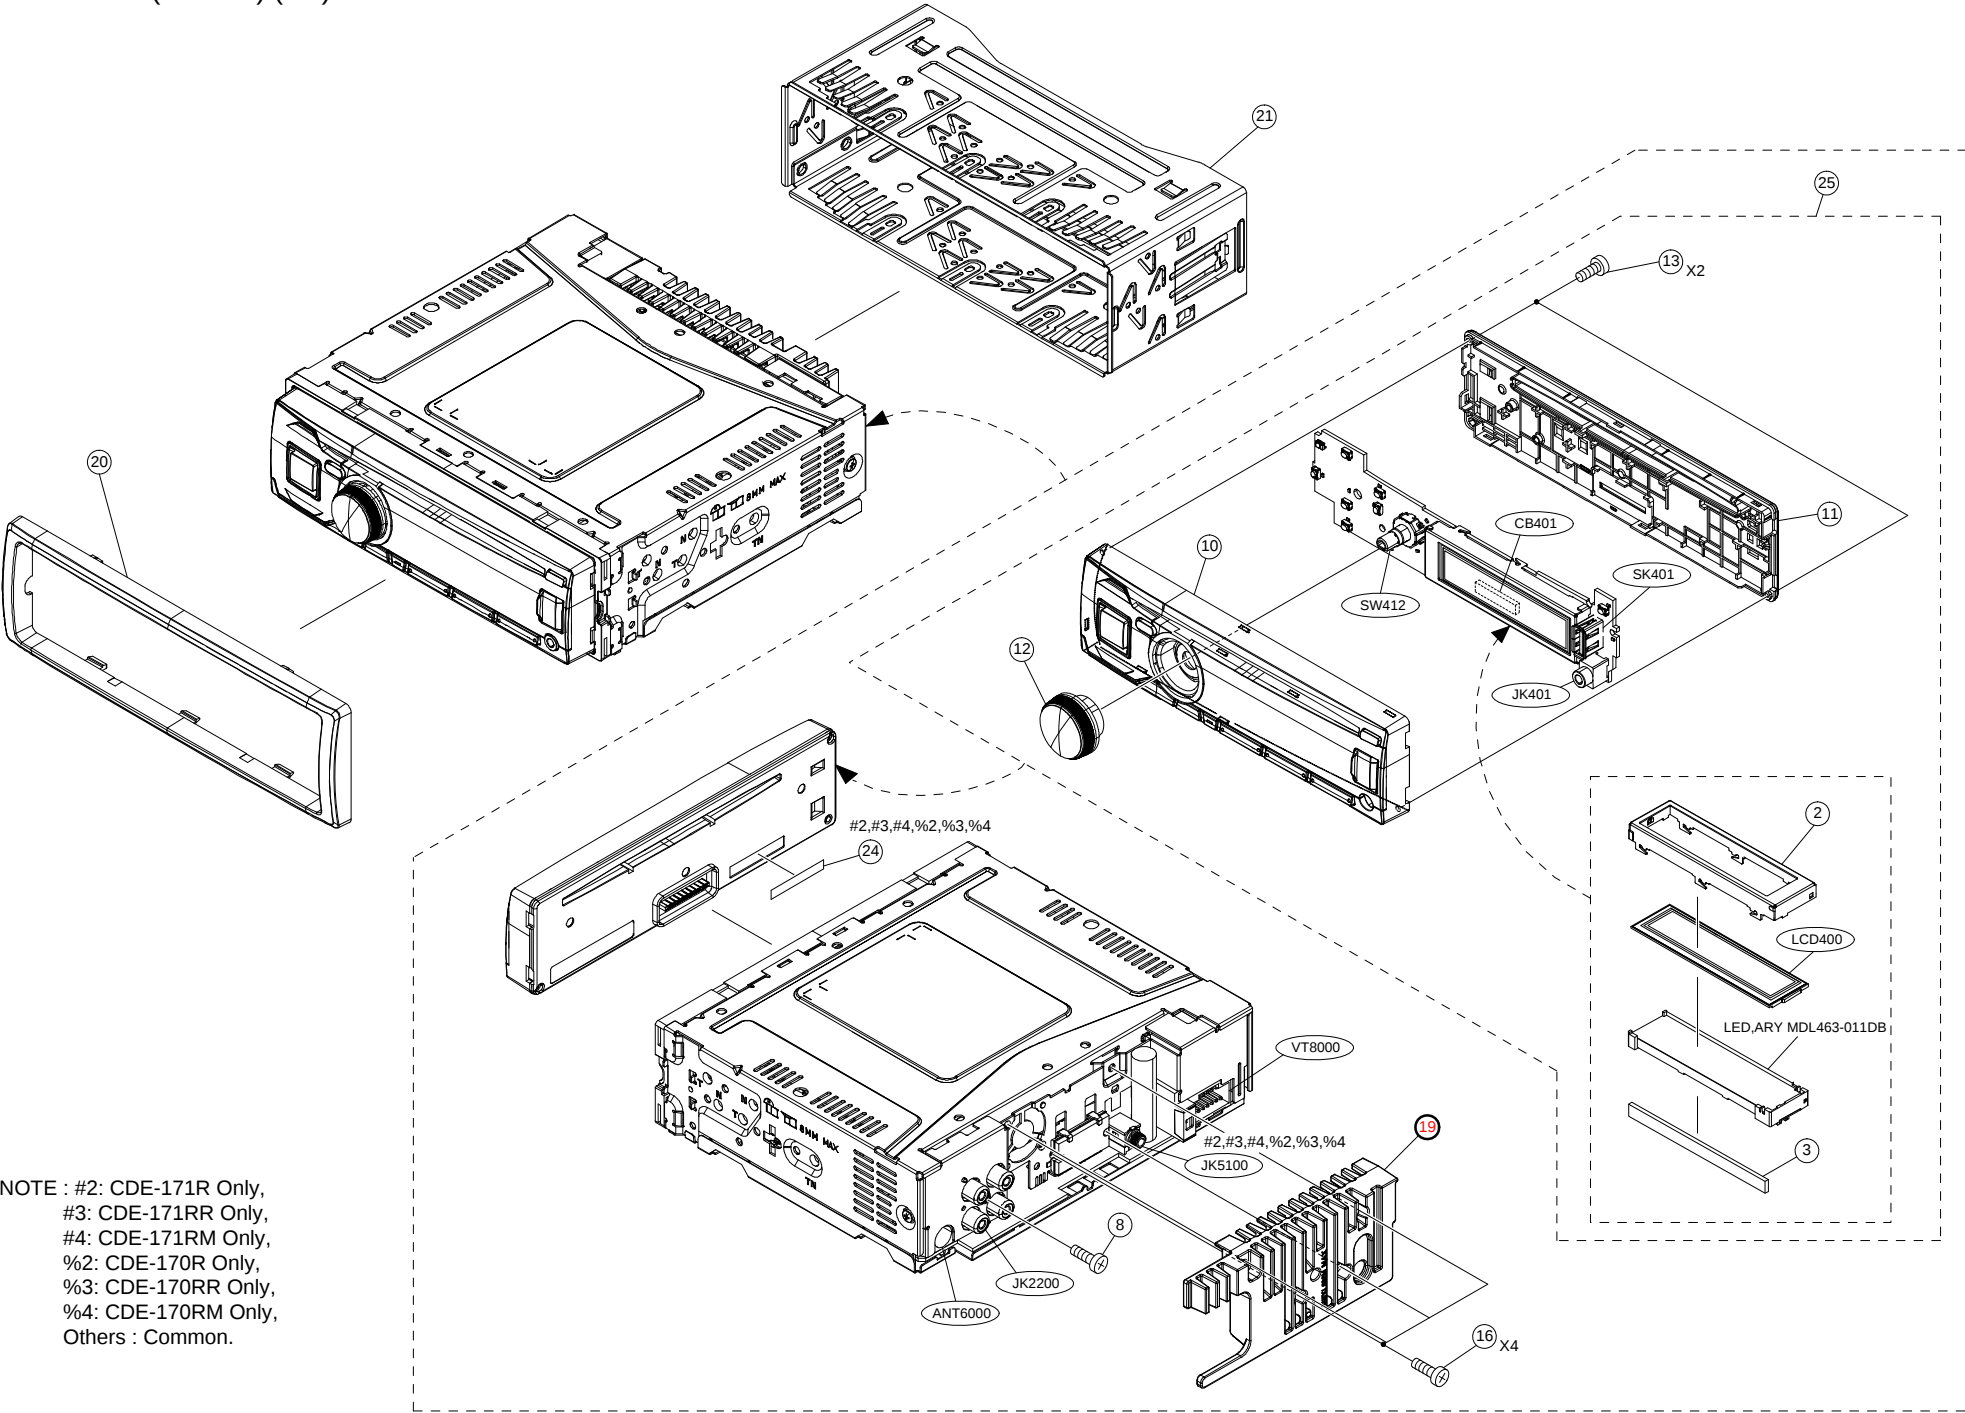


Exploded View (Cabinet) (1/2)

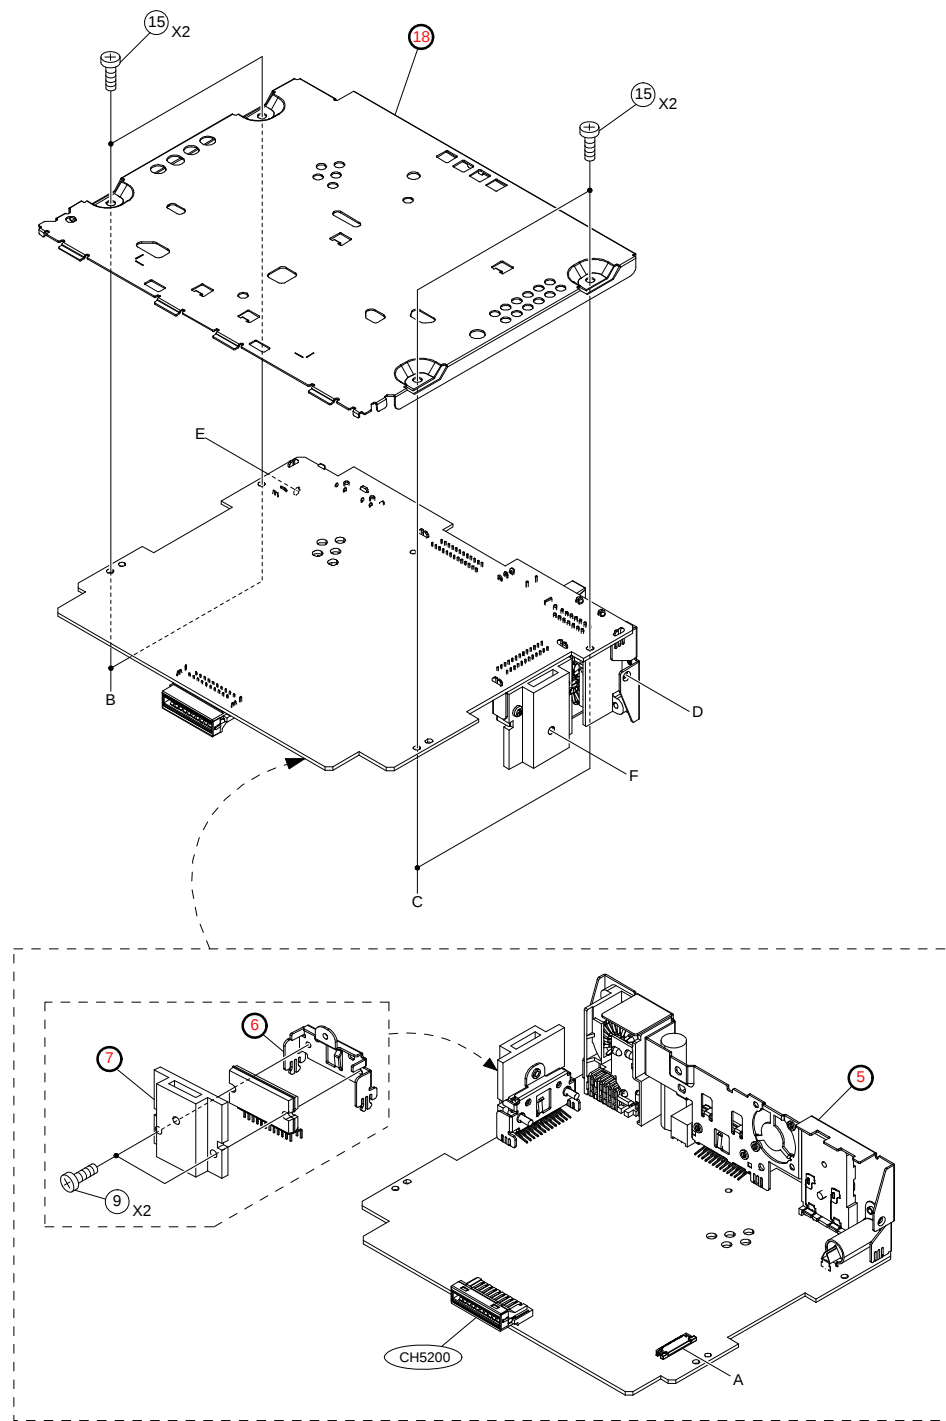

Exploded View (Cabinet) (2/2)

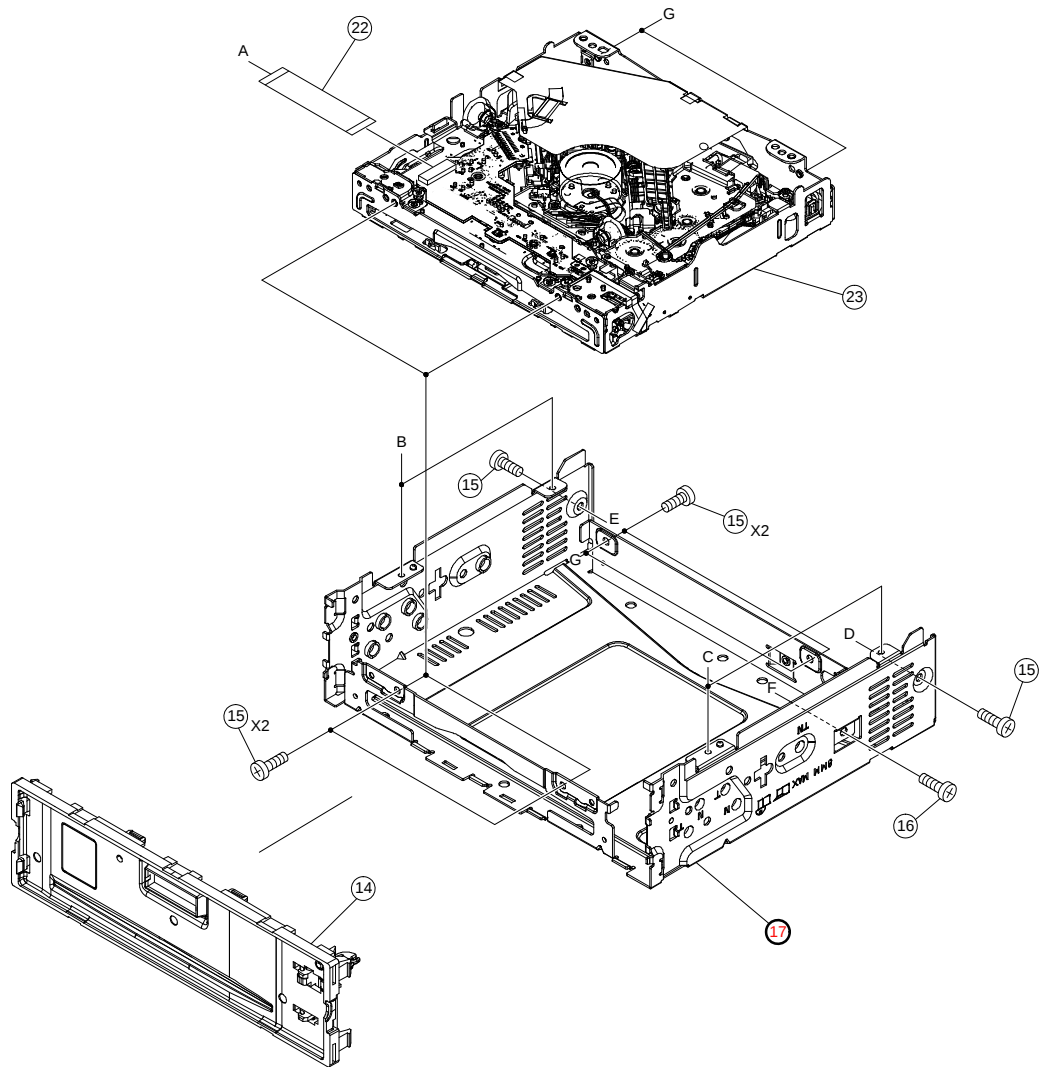

MODEL	Symbol No.	Parts No.	Description
	2	15-23773Z01	COVER,LCD
	3	75-24550Z01	RUBBER,GSS
	5	-----	BKT,CHAS REAR
	6	-----	BKT,IC SYS
	7	-----	HEAT,SINK SYS
	8	03S60825Y04	SCR,B-T 3X8 ZN A
	9	03S60822Y22	SCR,S-T 2.6X14 ZN A
#1	10	EN-24338Z11	NOSE,PIECE ASSY
#2	10	EN-24338Z13	NOSE,PIECE ASSY
#3	10	EN-24338Z12	NOSE,PIECE ASSY
#4	10	EN-24338Z14	NOSE,PIECE ASSY
#5	10	EN-24338Z26	NOSE,PIECE ASSY
\$1	10	EN-24338Z15	NOSE,PIECE ASSY
\$2	10	EN-24338Z15	NOSE,PIECE ASSY
\$3	10	EN-24338Z22	NOSE,PIECE ASSY
\$4	10	EN-24338Z16	NOSE,PIECE ASSY
%1	10	EN-24338Z01	NOSE,PIECE ASSY
%2	10	EN-24338Z03	NOSE,PIECE ASSY
%3	10	EN-24338Z02	NOSE,PIECE ASSY
%4	10	EN-24338Z04	NOSE,PIECE ASSY
&1	10	EN-24338Z05	NOSE,PIECE ASSY
&2	10	EN-24338Z05	NOSE,PIECE ASSY
&3	10	EN-24338Z19	NOSE,PIECE ASSY
&4	10	EN-24338Z06	NOSE,PIECE ASSY
	11	13-23791Z01	NOSE,BOTTOM
	12	36-23793Z01	KNOB,ROTARY ASSY
	13	03-02876Z28	SCR,WEV 1.7X7 ZB A
	14	EN-24496Z01	NOSE,BASE ASSY
	15	03S60822Y13	SCR,S-T 2.6X6 ZN A

Mark Model Code

#1 CDE-141 Only,
#2 CDE-171R Only,
#3 CDE-171RR Only,
#4 CDE-171RM Only,
#5 CDE-142E Only,
\$1 CDE-141E Only,
\$2 CDE-141E(Arabia language) Only,
\$3 CDE-141ETH Only,
\$4 CDE-141C Only,
%1 CDE-140 Only,
%2 CDE-170R Only,
%3 CDE-170RR Only,
%4 CDE-170RM Only,
&1 CDE-140E Only,
&2 CDE-140E(Arabia language) Only,
&3 CDE-140ETH Only,
&4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

[
]
]

MODEL	Symbol No.	Parts No.	Description
-------	------------	-----------	-------------

	16	03S60822Y22	SCR,S-T 2.6X14 ZN A
	17	-----	CHAS,BASE
	18	-----	COVER,BOTTOM
	19	-----	HEAT,SINK PWR
	20	33-23980Z01	FACE,PLATE
	21	15-24381Z01	CASE,INNER
	22	30-19721Z08	SML2CD-24X107-BDX6
	23	DP-23767Z01	DP86Z7BA
#2	24	64A51492W01	PLATE,SERIAL NO.
#3	24	64A51492W01	PLATE,SERIAL NO.
#4	24	64A51492W01	PLATE,SERIAL NO.
%2	24	64A51492W01	PLATE,SERIAL NO.
%3	24	64A51492W01	PLATE,SERIAL NO.
%4	24	64A51492W01	PLATE,SERIAL NO.
#1	25	SU-24875Z01	SERVICE_NOSE_141
#2	25	SU-24877Z01	SERVICE_NOSE_171R
#3	25	SU-24876Z01	SERVICE_NOSE_171RR
#4	25	SU-24878Z01	SERVICE_NOSE_171RM
#5	25	SU-25229Z01	SERVICE_NOSE_142E
\$1	25	SU-24879Z01	SERVICE_NOSE_141E
\$2	25	SU-24880Z01	SERVICE_NOSE_141EE
\$3	25	SU-24881Z01	SERVICE_NOSE_141ETH
\$4	25	SU-24882Z01	SERVICE_NOSE_141C
%1	25	SU-24867Z01	SERVICE_NOSE_140
%2	25	SU-24869Z01	SERVICE_NOSE_170R
%3	25	SU-24868Z01	SERVICE_NOSE_170RR
%4	25	SU-24870Z01	SERVICE_NOSE_170RM
&1	25	SU-24871Z01	SERVICE_NOSE_140E
&2	25	SU-24872Z01	SERVICE_NOSE_140EE

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

[
]
]

MODEL	Symbol No.	Parts No.	Description
&3	25	SU-24873Z01	SERVICE_NOSE_140ETH
&4	25	SU-24874Z01	SERVICE_NOSE_140C
	ANT6000	09T25015Y01	ANT,RECEPTACLE -DB
	CB401	09-18716Z01	BTB,DF20-P -EJ
	CH5200	09-18738Z01	BTB,DF20-S -DB
	JK2200	09-25329Z01	RCA,RJ-1346C41-0H0DB
	JK401	09-18872Z01	JAC,1850383000322-DB
#2	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
#3	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
#4	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
%2	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
%3	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
%4	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
	LCD400	65-23741Z01	LCD,EH8470M0TTN-FZ
	SK401	09-19382Z01	SKT,CM-V105 -DB
	SW412	40-10735Z02	ENC,EC12D1524405 -DB
	VT8000	25-25218Z01	ASSY,A039A0001 -DB


Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

(DP86Z7BA)

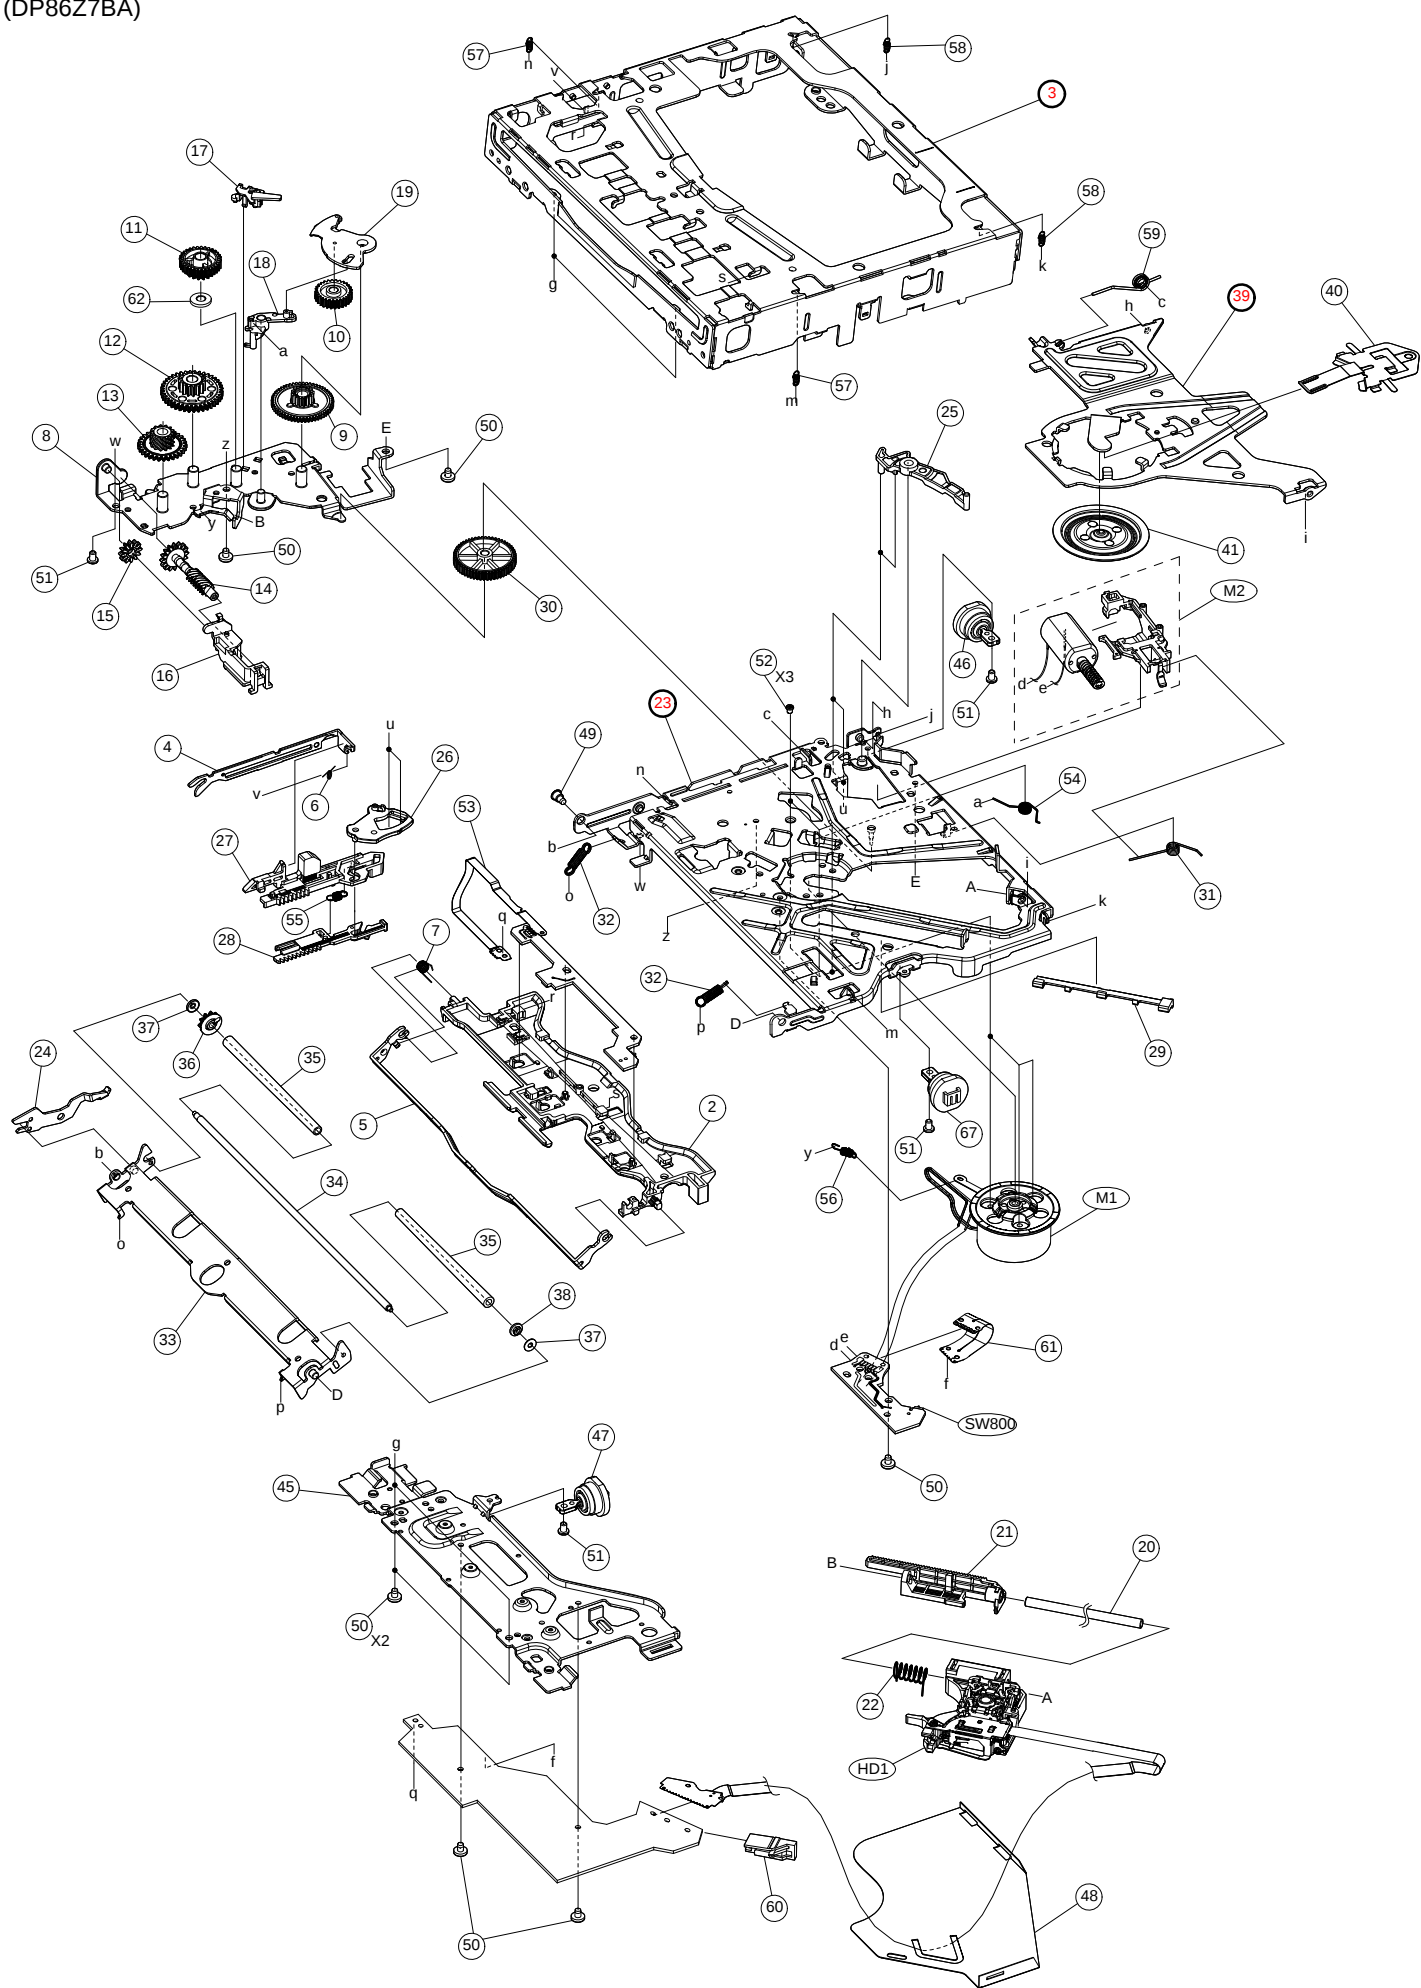

MODEL	Symbol No.	Parts No.	Description
	2	15-18550Z02	GUIDE,TOP DP-R
	3	-----	CHAS,TOP DP-R 4
	4	45-18546Z02	SLIDER,SHUTTER DP-R
	5	45-21916Z02	ARM,SHUTTER DP-R 2
	6	41-25310Z01	SPRING,TOR SLD SHUT
	7	41-19038Z03	SPRING,TOR SHUTTER
	8	07-18543Z02	BKT,GEAR DP-R
	9	44-18560Z02	GEAR,2 DP-R
	10	44-18561Z02	GEAR,3 DP-R
	11	44-18562Z02	GEAR,4 DP-R
	12	44-18563Z02	GEAR,5 DP-R
	13	44-18564Z02	GEAR,6 DP-R
	14	44-22407Z02	GEAR,7 DP-R 2
	15	44-22408Z02	GEAR,8 DP-R 2
	16	07-22406Z02	BKT,ROLLER GEAR 2
	17	07-18556Z02	BKT,IDLER DP-R
	18	45-18568Z02	LEVER,PICK DP-R
	19	45-18569Z02	LEVER,GEAR DP-R
	20	47-19048Z01	SHAFT,PICK DP-R
	21	44-18574Z02	RACK,SLED DP-R
	22	41-19044Z02	SPRING,SLED DP-R
	23	-----	ASSY,RIV CHAS DRIVE
	24	45-18548Z02	LEVER,ROLLER DP-R
	25	45-18570Z02	LEVER,TRIGGER DP-R
	26	45-18571Z02	LEVER,LOCK DP-R
	27	45-18572Z02	SLIDER,LOAD DP-R
	28	45-18573Z02	SLIDER,TRIGGER DP-R
	29	15-18576Z02	GUIDE,PICK SUB DP-R
	30	44-18559Z02	GEAR,1 DP-R
	31	41-19040Z02	SPRING,TOR WORM
	32	41-19046Z01	SPRING,COIL ROLLER

Mark Model Code

#1 CDE-141 Only,
#2 CDE-171R Only,
#3 CDE-171RR Only,
#4 CDE-171RM Only,
#5 CDE-142E Only,
\$1 CDE-141E Only,
\$2 CDE-141E(Arabia language) Only,
\$3 CDE-141ETH Only,
\$4 CDE-141C Only,
%1 CDE-140 Only,
%2 CDE-170R Only,
%3 CDE-170RR Only,
%4 CDE-170RM Only,
&1 CDE-140E Only,
&2 CDE-140E(Arabia language) Only,
&3 CDE-140ETH Only,
&4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
	33	45-22132Z02	ARM,DISC GUIDE 2
	34	47-19049Z01	SHAFT,ROLLER DP-R
	35	49-06683Z03	ROLLER,DV43M
	36	44-18567Z02	GEAR,ROLLER DP-R
	37	43-18554Z02	BUSH,ROLLER DP-R
	38	04S40075G88	WAS,LOC 1.7X4.5X0.25
	39	-----	ARM,CLAMP DP-R
	40	41-18549Z02	SPRING,CLAMPER DP-R
	41	43-18552Z02	TABLE,CLAMPER DP-R
	45	07-18542Z02	BKT,DAMPER DP-R
	46	75-20957Z04	DAMPER,DP-Z 2
	47	75-20957Z02	DAMPER,DP-Z 2
	48	14-22756Z01	INSULATOR,FPC DP-Z
	49	03-22573Z01	SCR,ARM GUIDE 2 DP-Z
	50	03S60822Y96	SCR,S-T 2X2.5 ZN A
	51	03-00340Z32	SCR,S-T 2X3.5 ZB A
	52	03-01599Z10	SCR,MCH 1.7X1.8 NN
	53	84-19730Z01	FPC,LED DP-Z
	54	41-19043Z01	SPRING,TOR LEV PICK
	55	41-19041Z01	SPRING,COIL TRIGGER
	56	41-20950Z01	SPRING,COIL SPINDLE
	57	41-24156Z01	SPRING,COIL DRIVE-F
	58	41-24156Z02	SPRING,COIL DRIVE-R
	59	41-19042Z02	SPRING,TOR CLAMP
	60	07-23319Z02	BKT,FPC PICK DP-Z
	61	84-21702Z01	FPC,DRIVE 8BF DP-Z
	62	04S40075G96	WAS,LOC 4.1X7.0X0.13
	67	75-20957Z01	DAMPER,DP-Z 2
	HD1	EP-17785Z01	EP21A99N
	M1	66-23978Z27	ASSY,MTR SPDL RF300
	M2	66-23978Z28	ASSY,MTR SLED 2

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
	SW800	40T15494Y18	SW,DETCT SPVG1302-E6






Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

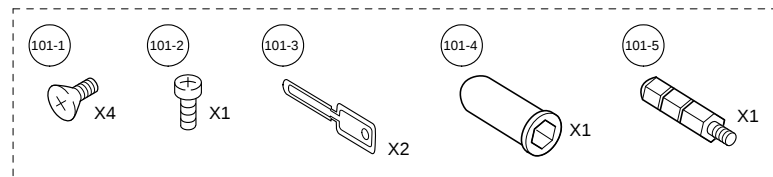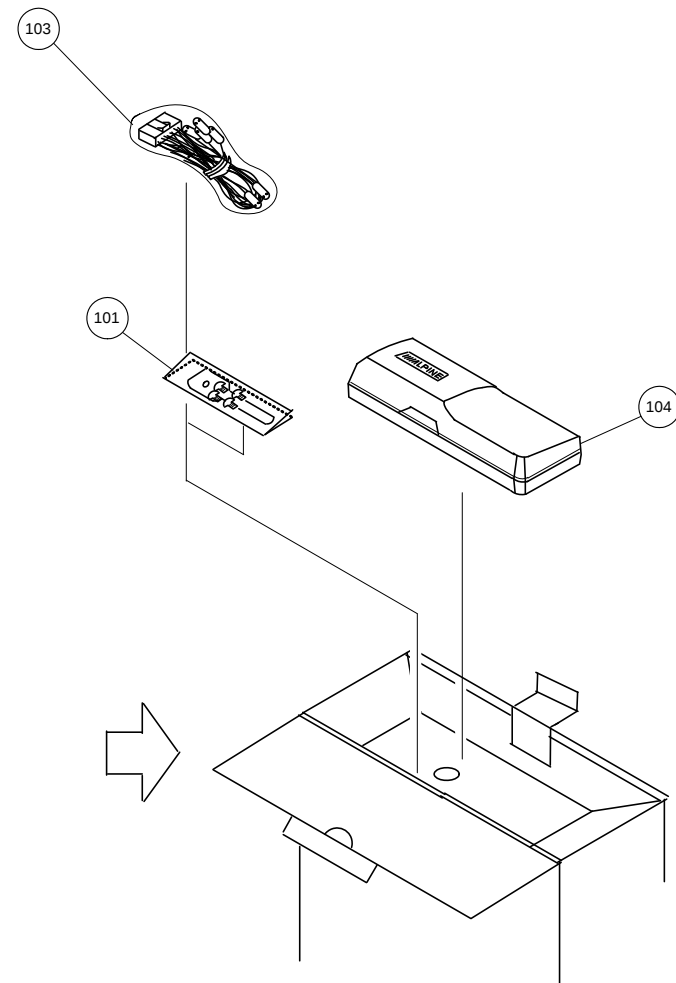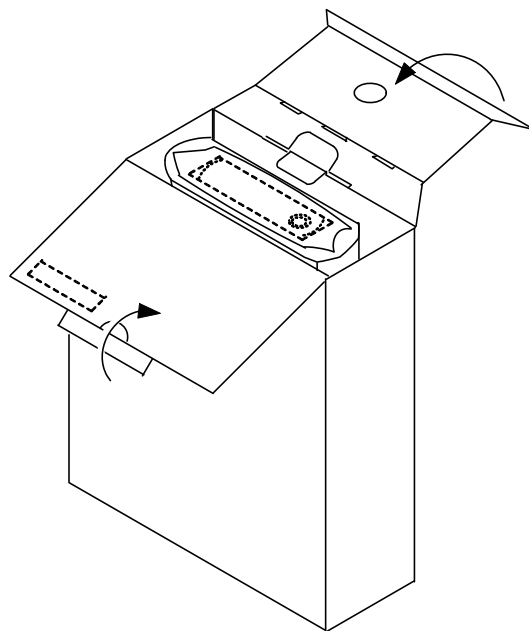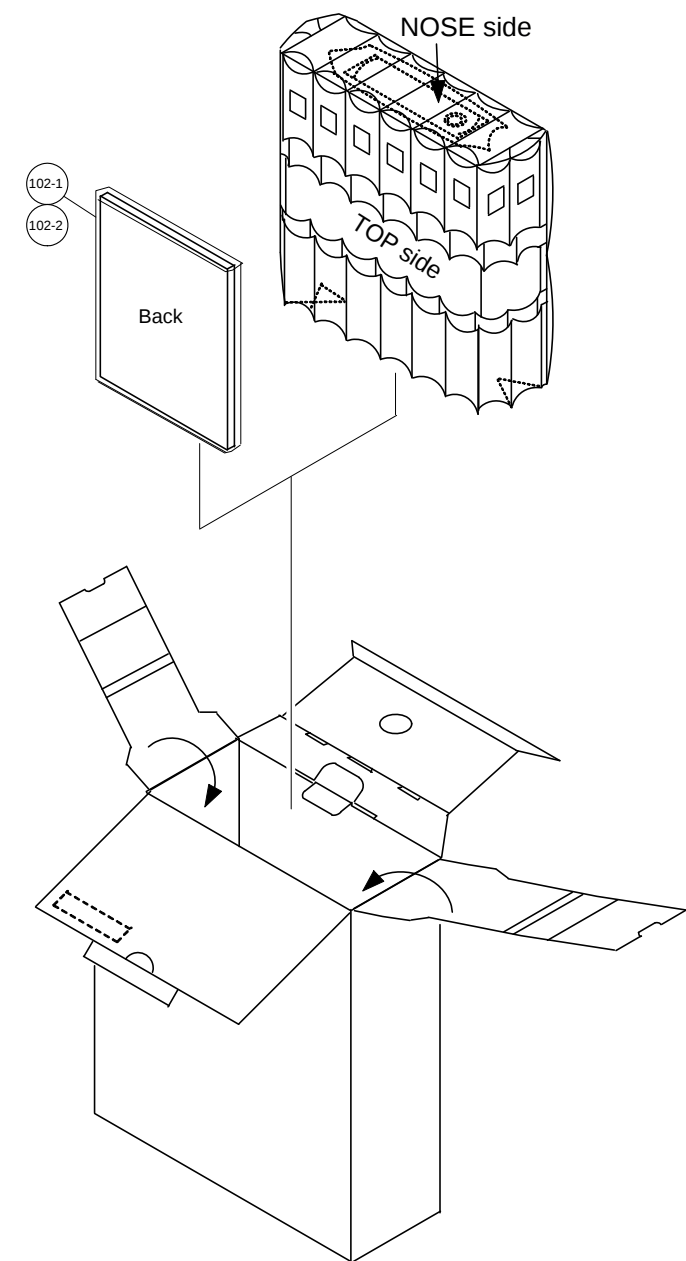

MODEL	Symbol No.	Parts No.	Description
	101-1	03S60820Y16	SCR,MCH 5X8 ZN A
	101-2	03S60824Y01	SCR,WEV 1.7X4 ZN A
	101-3	07-24382Z01	BKT,RELEASE
#2	101-4	36A02449K01	CAP,RUBBER(A)
#3	101-4	36A02449K01	CAP,RUBBER(A)
#4	101-4	36A02449K01	CAP,RUBBER(A)
%2	101-4	36A02449K01	CAP,RUBBER(A)
%3	101-4	36A02449K01	CAP,RUBBER(A)
%4	101-4	36A02449K01	CAP,RUBBER(A)
#2	101-5	03A60836Y01	SCR,CUS 5X7 ZN A
#3	101-5	03A60836Y01	SCR,CUS 5X7 ZN A
#4	101-5	03A60836Y01	SCR,CUS 5X7 ZN A
%2	101-5	03A60836Y01	SCR,CUS 5X7 ZN A
%3	101-5	03A60836Y01	SCR,CUS 5X7 ZN A
%4	101-5	03A60836Y01	SCR,CUS 5X7 ZN A
#1	102-1	68-10334Z55	O/M-CDROM AOTH
#2	102-1	68-10334Z55	O/M-CDROM AOTH
#3	102-1	68-10334Z55	O/M-CDROM AOTH
#4	102-1	68-10334Z55	O/M-CDROM AOTH
#5	102-1	68-21627Z70	O/M AOAP AOTH
\$1	102-1	68-21627Z70	O/M AOAP AOTH
\$2	102-1	68-21627Z83	O/M AOAP AOTH
\$3	102-1	68-21627Z70	O/M AOAP AOTH
\$4	102-1	68-21627Z72	O/M AOCH AOTH
%1	102-1	68-10334Z55	O/M-CDROM AOTH
%2	102-1	68-10334Z55	O/M-CDROM AOTH
%3	102-1	68-10334Z55	O/M-CDROM AOTH

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
%4	102-1	68-10334Z55	O/M-CDROM AOTH
&1	102-1	68-21627Z70	O/M AOAP AOTH
&2	102-1	68-21627Z83	O/M AOAP AOTH
&3	102-1	68-21627Z70	O/M AOAP AOTH
&4	102-1	68-21627Z72	O/M AOCH AOTH
#1	102-2	68-21627Z67	C/N-QRG AOAM AOTH
#2	102-2	68-21627Z69	C/N-QRG AOEU AOTH
#3	102-2	68-21627Z69	C/N-QRG AOEU AOTH
#4	102-2	68-21627Z69	C/N-QRG AOEU AOTH
%1	102-2	68-21627Z67	C/N-QRG AOAM AOTH
%2	102-2	68-21627Z69	C/N-QRG AOEU AOTH
%3	102-2	68-21627Z69	C/N-QRG AOEU AOTH
%4	102-2	68-21627Z69	C/N-QRG AOEU AOTH
#1	103	09-25214Z01	ASSY,ANIC-0081-01A
#2	103	09-25216Z01	ASSY,ANIC-0083-01A
#3	103	09-25216Z01	ASSY,ANIC-0083-01A
#4	103	09-25216Z01	ASSY,ANIC-0083-01A
#5	103	09-25214Z02	ASSY,ANIC-0081-02A
\$1	103	09-25214Z02	ASSY,ANIC-0081-02A
\$2	103	09-25214Z02	ASSY,ANIC-0081-02A
\$3	103	09-25214Z02	ASSY,ANIC-0081-02A
\$4	103	09-25214Z01	ASSY,ANIC-0081-01A
%1	103	09-25214Z01	ASSY,ANIC-0081-01A
%2	103	09-25216Z01	ASSY,ANIC-0083-01A
%3	103	09-25216Z01	ASSY,ANIC-0083-01A
%4	103	09-25216Z01	ASSY,ANIC-0083-01A
&1	103	09-25214Z02	ASSY,ANIC-0081-02A

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
&2	103	09-25214Z02	ASSY,ANIC-0081-02A
&3	103	09-25214Z02	ASSY,ANIC-0081-02A
&4	103	09-25214Z01	ASSY,ANIC-0081-01A
#2	104	15-24676Z01	CARRYING,CASE ASSY
#3	104	15-24676Z01	CARRYING,CASE ASSY
#4	104	15-24676Z01	CARRYING,CASE ASSY
#5	104	15-24676Z01	CARRYING,CASE ASSY
\$1	104	15-24676Z01	CARRYING,CASE ASSY
\$2	104	15-24676Z01	CARRYING,CASE ASSY
\$3	104	15-24676Z01	CARRYING,CASE ASSY
&1	104	15-24676Z01	CARRYING,CASE ASSY
&2	104	15-24676Z01	CARRYING,CASE ASSY
&3	104	15-24676Z01	CARRYING,CASE ASSY

Mark Model Code

#1 CDE-141 Only,
#2 CDE-171R Only,
#3 CDE-171RR Only,
#4 CDE-171RM Only,
#5 CDE-142E Only,
\$1 CDE-141E Only,
\$2 CDE-141E(Arabia language) Only,
\$3 CDE-141ETH Only,
\$4 CDE-141C Only,
%1 CDE-140 Only,
%2 CDE-170R Only,
%3 CDE-170RR Only,
%4 CDE-170RM Only,
&1 CDE-140E Only,
&2 CDE-140E(Arabia language) Only,
&3 CDE-140ETH Only,
&4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ANT6000	09T25015Y01	ANT,RECEPTACLE -DB
MAIN-P.W.Board			C1000	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C1002	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1003	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C1004	08S65668Y05	CAP,CER 224KX5R1A-CP
MAIN-P.W.Board			C1005	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1007	08S35349Y17	CAP,CER 225K-B0J -CP
MAIN-P.W.Board			C1008	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board			C1009	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board			C1010	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1011	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1012	08S45231Y13	CAP,CER 10RD-CH1H-CP
MAIN-P.W.Board			C1013	08S45231Y13	CAP,CER 10RD-CH1H-CP
MAIN-P.W.Board			C1016	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C1017	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C1018	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C1019	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1020	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C1021	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C1022	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C1023	08S35349Y17	CAP,CER 225K-B0J -CP
MAIN-P.W.Board			C1024	08S45231Y15	CAP,CER 15RJ-CH1H-CP
MAIN-P.W.Board			C1025	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1026	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C1027	08S45676W69	CAP,CER.472K-B1H -CP
MAIN-P.W.Board			C1028	08S45232Y12	CAP,CER 153K-B1C -CP
MAIN-P.W.Board			C1029	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1031	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1032	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1033	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1034	08S45232Y14	CAP,CER 333K-B1C -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1036	08S45232Y14	CAP,CER 333K-B1C -CP
MAIN-P.W.Board			C1037	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C1038	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C1039	08S45232Y14	CAP,CER 333K-B1C -CP
MAIN-P.W.Board			C1040	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C1041	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1042	08S45231Y21	CAP,CER 47RJ-CH1H-CP
MAIN-P.W.Board			C1043	08S45232Y12	CAP,CER 153K-B1C -CP
MAIN-P.W.Board			C1044	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN-P.W.Board			C1045	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1046	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1047	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C1049	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C1051	08S45232Y14	CAP,CER 333K-B1C -CP
MAIN-P.W.Board			C1052	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C1053	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C1054	08S45232Y14	CAP,CER 333K-B1C -CP
MAIN-P.W.Board			C1055	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C1057	08S45231Y15	CAP,CER 15RJ-CH1H-CP
MAIN-P.W.Board			C1058	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1059	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1061	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C1062	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C1063	08S45231Y38	CAP,CER 102J-CH1E-CP
MAIN-P.W.Board			C1064	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C1065	08S45231Y28	CAP,CER 181J-CH1H-CP
MAIN-P.W.Board			C1066	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C1069	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C1070	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C1071	08S45676W93	CAP,CER 224K-B1A -CP
MAIN-P.W.Board			C1073	08S35349Y15	CAP,CER 474K-B1A -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1074	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C1075	08S35349Y15	CAP,CER 474K-B1A -CP
MAIN-P.W.Board			C1076	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C1077	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C1079	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C1080	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C1081	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C1083	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C1084	08S45676W93	CAP,CER 224K-B1A -CP
MAIN-P.W.Board			C1085	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C1086	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C2000	08S65676Y07	CAP,CER 225K-X7R1ECP
MAIN-P.W.Board			C2001	08S65676Y07	CAP,CER 225K-X7R1ECP
MAIN-P.W.Board			C2002	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C2004	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C2005	08S65676Y07	CAP,CER 225K-X7R1ECP
MAIN-P.W.Board			C2006	08S65676Y07	CAP,CER 225K-X7R1ECP
MAIN-P.W.Board			C2007	08S65676Y07	CAP,CER 225K-X7R1ECP
MAIN-P.W.Board			C2008	08S65676Y07	CAP,CER 225K-X7R1ECP
MAIN-P.W.Board			C2009	08S45677W46	CAP,CER 271J-CH1H-CP
MAIN-P.W.Board			C2010	08S45677W54	CAP,CER 561J-CH1H-CP
MAIN-P.W.Board			C2011	08S45677W46	CAP,CER 271J-CH1H-CP
MAIN-P.W.Board			C2012	08S45677W54	CAP,CER 561J-CH1H-CP
MAIN-P.W.Board			C2013	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C2014	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board			C2015	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board			C2100	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C2200	08S45676W70	CAP,CER 562K-B1H -CP
MAIN-P.W.Board			C5002	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C5003	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C5004	08S65667Y01	CAP,CER 224KX5R1C-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5005	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C5007	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C5008	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C5009	08S45231Y10	CAP,CER 7R0D-CH1H-CP
MAIN-P.W.Board			C5010	08S45231Y10	CAP,CER 7R0D-CH1H-CP
MAIN-P.W.Board		#1	C5011	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board		%1	C5011	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board		#1	C5012	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board		%1	C5012	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board			C5014	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C5016	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN-P.W.Board			C5017	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN-P.W.Board		#2	C5019	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		#3	C5019	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		#4	C5019	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		%2	C5019	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		%3	C5019	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		%4	C5019	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		#2	C5020	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		#3	C5020	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		#4	C5020	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		%2	C5020	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		%3	C5020	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board		%4	C5020	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C5021	08S35349Y17	CAP,CER 225K-B0J -CP
MAIN-P.W.Board			C5024	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board			C5025	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		#2	C5100	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board		#3	C5100	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board		#4	C5100	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board		%2	C5100	08S35374W01	CAP,CER 104K-B1E-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		%3	C5100	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board		%4	C5100	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board		#2	C5101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board		#3	C5101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board		#4	C5101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board		%2	C5101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board		%3	C5101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board		%4	C5101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board		#2	C5102	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		#3	C5102	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		#4	C5102	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		%2	C5102	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		%3	C5102	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		%4	C5102	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board			C6000	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C6001	08S82122F17	CAP,CER.15RJ-CH1H-CP
MAIN-P.W.Board			C6002	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6003	08S45231Y19	CAP,CER 33RJ-CH1H-CP
MAIN-P.W.Board			C6004	08-17773Z01	CAP,CER 2R2B-CH1H-CP
MAIN-P.W.Board			C6005	08S45231Y14	CAP,CER 12RJ-CH1H-CP
MAIN-P.W.Board			C6006	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6007	08S45676W93	CAP,CER 224K-B1A -CP
MAIN-P.W.Board			C6008	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C6009	08S65674Y08	CAP,CER 105KX5R1E-CP
MAIN-P.W.Board			C6010	08S45676W93	CAP,CER 224K-B1A -CP
MAIN-P.W.Board			C6011	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN-P.W.Board			C6012	08S45231Y13	CAP,CER 10RD-CH1H-CP
MAIN-P.W.Board			C6013	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C6014	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C6015	08S65674Y08	CAP,CER 105KX5R1E-CP
MAIN-P.W.Board			C6016	08S45232Y11	CAP,CER 103K-B1C -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C6017	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN-P.W.Board			C6018	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C6019	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN-P.W.Board			C6020	08S65674Y08	CAP,CER 105KX5R1E-CP
MAIN-P.W.Board			C6021	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN-P.W.Board		#1	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		#2	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		#3	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		#4	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		#5	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		\$1	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		\$2	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		\$3	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board		\$4	C7000	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C8002	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8003	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8004	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8005	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8006	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C8008	08S45232Y14	CAP,CER 333K-B1C -CP
MAIN-P.W.Board			C8011	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8013	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8014	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8018	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8019	08S65128F88	CAP,CER 104K-B1H -CP
MAIN-P.W.Board			C8020	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C8021	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8022	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8023	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8024	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8025	08S65669Y03	CAP,CER 224KX7R1H-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C8026	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8027	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8028	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8029	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8030	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8031	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8033	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8035	08S65128F90	CAP,CER 473K-B1H -CP
MAIN-P.W.Board			C8036	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8037	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8039	08S35349Y17	CAP,CER 225K-B0J -CP
MAIN-P.W.Board			C8040	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8042	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8043	08S65669Y03	CAP,CER 224KX7R1H-CP
MAIN-P.W.Board			C8100	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board			C8101	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board			C8102	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board			C8103	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board			C8104	08S65676Y02	CAP,CER 475KX7R1A-CP
MAIN-P.W.Board		#1	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		#2	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		#3	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		#4	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		%1	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		%2	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		%3	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		%4	C8200	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			CB1000	09T75287Y24	FFC,IMSA9631S-24Y-ED
MAIN-P.W.Board			CH5200	09-18738Z01	BTB,DF20-S -DB
MAIN-P.W.Board			D2100	48-05965Z01	DIO,1SS361-L -CP
MAIN-P.W.Board			D2200	48-07016Z01	DIO,KDS181-RTK -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D2201	48-07016Z01	DIO,KDS181-RTK -CP
MAIN-P.W.Board		#2	D5100	48-07016Z02	DIO,KDS184-RTK -CP
MAIN-P.W.Board		#3	D5100	48-07016Z02	DIO,KDS184-RTK -CP
MAIN-P.W.Board		#4	D5100	48-07016Z02	DIO,KDS184-RTK -CP
MAIN-P.W.Board		%2	D5100	48-07016Z02	DIO,KDS184-RTK -CP
MAIN-P.W.Board		%3	D5100	48-07016Z02	DIO,KDS184-RTK -CP
MAIN-P.W.Board		%4	D5100	48-07016Z02	DIO,KDS184-RTK -CP
MAIN-P.W.Board			D6000	48-12230Z01	DIO,KDS226-RTK -CP
MAIN-P.W.Board			D8000	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8001	48T75446Y01	DIO,RR264M-400 -CP
MAIN-P.W.Board			D8002	48-05164Z01	DIO,1SS352-TPH3 -CP
MAIN-P.W.Board			D8003	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8004	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D8007	48-05828Z01	DIO,1N5406G-04 -
MAIN-P.W.Board			E1000	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E1001	23S65134W23	CAP,ELY 101-1A(6)-E6
MAIN-P.W.Board			E1002	23T65679Y11	CAP,CD 47R-0J -E2
MAIN-P.W.Board			E1003	23S65134W24	CAP,ELY 221-1A(8)-E6
MAIN-P.W.Board			E1004	23S75244Y17	CAP,ELY 22R-1C -E2
MAIN-P.W.Board			E1006	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E2003	23T75234Y20	CAP,MAR 22R-1E-F55E6
MAIN-P.W.Board			E2004	23T75234Y19	CAP,MAR 101-1C-H63E6
MAIN-P.W.Board			E2100	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E2200	23S65134W52	CAP,ELY 3R3-1V(3)-E2
MAIN-P.W.Board			E2201	23S65134W52	CAP,ELY 3R3-1V(3)-E2
MAIN-P.W.Board			E2202	23S65134W52	CAP,ELY 3R3-1V(3)-E2
MAIN-P.W.Board			E2203	23S65134W52	CAP,ELY 3R3-1V(3)-E2
MAIN-P.W.Board			E5000	23S65134W36	CAP,ELY 221-1C(8)-EA
MAIN-P.W.Board			E6000	23T75234Y06	CAP,MAR 22R-1C-E55E3
MAIN-P.W.Board		#1	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		#2	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		#3	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		#4	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		#5	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		\$1	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		\$2	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		\$3	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board		\$4	E7000	23S65134W81	CAP,ELY 22R-1C(4)-E2
MAIN-P.W.Board			E8004	23T75234Y06	CAP,MAR 22R-1C-E55E3
MAIN-P.W.Board			E8006	23T75346W03	CAP,X-PRO 332-1C +
MAIN-P.W.Board			E8011	23S75244Y19	CAP,ELY 101-1C -E6
MAIN-P.W.Board			E8013	23S75244Y19	CAP,ELY 101-1C -E6
MAIN-P.W.Board			E8016	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E8017	23S65134W54	CAP,ELY 10R-1V(5)-E3
MAIN-P.W.Board			E8018	23S65134W35	CAP,ELY 101-1C(8)-E6
MAIN-P.W.Board			E8020	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E8022	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E8023	23S65134W54	CAP,ELY 10R-1V(5)-E3
MAIN-P.W.Board			E8025	23S75244Y19	CAP,ELY 101-1C -E6
MAIN-P.W.Board			E8026	23T65114Y28	CAP,FK 101-1E-D8-E6
MAIN-P.W.Board			E8027	23S65134W23	CAP,ELY 101-1A(6)-E6
MAIN-P.W.Board			E8032	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			IC1000	51-12485Z10	IC,TMP92CD28AFG -QT
MAIN-P.W.Board			IC1001	51-16202Z03	TC94A92FG301CAPNH-QT
MAIN-P.W.Board			IC1002	51-14737Z01	BD8226EFV-E2 -SE6
MAIN-P.W.Board			IC1003	51-11433Z01	RT9702AGB -CP
MAIN-P.W.Board			IC1004	51T15185Y02	TC7SH08FU,JF-L -CP
MAIN-P.W.Board			IC2000	51-05314Z01	BA4560RFVM-TR -SE1
MAIN-P.W.Board			IC2001	51-19762Z01	BD37543FS-E2 -SE9
MAIN-P.W.Board		#2	IC5000	51T15185Y02	TC7SH08FU,JF-L -CP
MAIN-P.W.Board		#3	IC5000	51T15185Y02	TC7SH08FU,JF-L -CP
MAIN-P.W.Board		#4	IC5000	51T15185Y02	TC7SH08FU,JF-L -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		%2	IC5000	51T15185Y02	TC7SH08FU,JF-L -CP
MAIN-P.W.Board		%3	IC5000	51T15185Y02	TC7SH08FU,JF-L -CP
MAIN-P.W.Board		%4	IC5000	51T15185Y02	TC7SH08FU,JF-L -CP
MAIN-P.W.Board		#1	IC5001	83-22939Z72	13USBipod BTM_A_Main_Soft
MAIN-P.W.Board		#2	IC5001	83-22939Z73	13USBipod BTM_R_Main_Soft
MAIN-P.W.Board		#3	IC5001	83-22939Z73	13USBipod BTM_R_Main_Soft
MAIN-P.W.Board		#4	IC5001	83-22939Z73	13USBipod BTM_R_Main_Soft
MAIN-P.W.Board		#5	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		\$1	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		\$2	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		\$3	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		\$4	IC5001	83-22939Z75	13USBipod BTM_C_Main_Soft
MAIN-P.W.Board		%1	IC5001	83-22939Z72	13USBipod BTM_A_Main_Soft
MAIN-P.W.Board		%2	IC5001	83-22939Z73	13USBipod BTM_R_Main_Soft
MAIN-P.W.Board		%3	IC5001	83-22939Z73	13USBipod BTM_R_Main_Soft
MAIN-P.W.Board		%4	IC5001	83-22939Z73	13USBipod BTM_R_Main_Soft
MAIN-P.W.Board		&1	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		&2	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		&3	IC5001	83-22939Z74	13USBipod BTM_E_Main_Soft
MAIN-P.W.Board		&4	IC5001	83-22939Z75	13USBipod BTM_C_Main_Soft
MAIN-P.W.Board			IC5002	51-24794Z01	BR24T02F-WGE2 -SE2
MAIN-P.W.Board		#2	IC5004	51T55336Y02	TC7SH04FU,JF-L -CP
MAIN-P.W.Board		#3	IC5004	51T55336Y02	TC7SH04FU,JF-L -CP
MAIN-P.W.Board		#4	IC5004	51T55336Y02	TC7SH04FU,JF-L -CP
MAIN-P.W.Board		%2	IC5004	51T55336Y02	TC7SH04FU,JF-L -CP
MAIN-P.W.Board		%3	IC5004	51T55336Y02	TC7SH04FU,JF-L -CP
MAIN-P.W.Board		%4	IC5004	51T55336Y02	TC7SH04FU,JF-L -CP
MAIN-P.W.Board		#2	IC5100	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board		#3	IC5100	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board		#4	IC5100	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board		%2	IC5100	51T93532F05	TC4S01F-TE85L -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		%3	IC5100	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board		%4	IC5100	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board		#1	IC6000	51-17583Z01	TEF6607T/V5 -SEE
MAIN-P.W.Board		#2	IC6000	51-20754Z01	TEF6616T/V1,518 -SEE
MAIN-P.W.Board		#3	IC6000	51-20754Z01	TEF6616T/V1,518 -SEE
MAIN-P.W.Board		#4	IC6000	51-20754Z01	TEF6616T/V1,518 -SEE
MAIN-P.W.Board		#5	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		\$1	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		\$2	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		\$3	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		\$4	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		%1	IC6000	51-17583Z01	TEF6607T/V5 -SEE
MAIN-P.W.Board		%2	IC6000	51-20754Z01	TEF6616T/V1,518 -SEE
MAIN-P.W.Board		%3	IC6000	51-20754Z01	TEF6616T/V1,518 -SEE
MAIN-P.W.Board		%4	IC6000	51-20754Z01	TEF6616T/V1,518 -SEE
MAIN-P.W.Board		&1	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		&2	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		&3	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		&4	IC6000	51-19546Z01	TEF6621T/V1,518 -SEE
MAIN-P.W.Board		#1	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		#2	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		#3	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		#4	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		#5	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		\$1	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		\$2	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		\$3	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board		\$4	IC7000	51-15224Z01	MFI341S2313 -SE2
MAIN-P.W.Board			IC8000	51-22858Z01	TB2959HQ -ZS
MAIN-P.W.Board			IC8002	51-07902Z02	NJM2871BF33-TE1 -CP
MAIN-P.W.Board			IC8003	51-13711Z01	TB2920HQ -ZS

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC8004	51-06963Z01	NJU7741F15-TE1 -CP
MAIN-P.W.Board			IC8005	51-04315Z22	BU4229G-TR -CP
MAIN-P.W.Board			IC8006	51-06963Z01	NJU7741F15-TE1 -CP
MAIN-P.W.Board			IC8007	51-02830Z01	BA7810HFP -NEA
MAIN-P.W.Board			IC8008	51-05862Z01	NJM2845DL1-33-TE1NE5
MAIN-P.W.Board			IC8009	51-05862Z01	NJM2845DL1-33-TE1NE5
MAIN-P.W.Board			JK2200	09-25329Z01	RCA,RJ-1346C41-0H0DB
MAIN-P.W.Board		#2	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board		#3	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board		#4	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board		%2	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board		%3	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board		%4	JK5100	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board			L6000	24T25164Y21	IND,FSLM2520 4R7J-CP
MAIN-P.W.Board			L6001	24T45482Y05	IND,LQH31HN R29J -CP
MAIN-P.W.Board			L6002	24T65110W16	IND,LK2125 1R0K -CP
MAIN-P.W.Board			L6003	24T65110W09	IND,LK2125 R27K -CP
MAIN-P.W.Board			L6004	24T65110W19	IND,LK2125 1R8K -CP
MAIN-P.W.Board			L6005	24T65645Y03	IND,LLM3225 561K -CP
MAIN-P.W.Board			L6006	24T65645Y03	IND,LLM3225 561K -CP
MAIN-P.W.Board			L6007	24-10967Z18	IND,LBM2016 3R3J -CP
MAIN-P.W.Board			Q1000	48-08605Z01	TR,2SA2048-TL -CP
MAIN-P.W.Board			Q1001	48-13000Z06	TR,LTC143XUBFS8-TLCP
MAIN-P.W.Board			Q1002	48-17707Z01	TR,DSA700300L -E2
MAIN-P.W.Board			Q1003	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board			Q1004	48T55462Y01	TR,2SB1132-QR-100-E2
MAIN-P.W.Board			Q1005	48-04940Z17	TR,KRA118S-RTK -CP
MAIN-P.W.Board			Q1006	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board			Q2100	48-20093Z01	TR,DMC561010R -CP
MAIN-P.W.Board			Q2102	48-04929Z02	TR,KRC102S-RTK -CP
MAIN-P.W.Board			Q2103	48-13000Z05	TR,LTC124EUBFS8-TLCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q2104	48T25737Y01	TR,UMD2N-TR -CP
MAIN-P.W.Board			Q2200	48T75180Y04	TR,IMH23-T110 -CP
MAIN-P.W.Board			Q2201	48T75180Y04	TR,IMH23-T110 -CP
MAIN-P.W.Board		#2	Q5100	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#3	Q5100	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#4	Q5100	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		%2	Q5100	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		%3	Q5100	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		%4	Q5100	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#2	Q5101	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board		#3	Q5101	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board		#4	Q5101	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board		%2	Q5101	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board		%3	Q5101	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board		%4	Q5101	48-13000Z01	TR,LTC114EUBFS8-TLCP
MAIN-P.W.Board		#1	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		#2	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		#3	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		#4	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		#5	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		\$1	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		\$2	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		\$3	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		\$4	Q7000	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board		#1	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#2	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#3	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#4	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#5	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		\$1	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		\$2	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		\$3	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		\$4	Q7001	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board			Q8001	48T25737Y01	TR,UMD2N-TR -CP
MAIN-P.W.Board			Q8002	48-20094Z02	TR,DMA561020R -CP
MAIN-P.W.Board			Q8003	48T25737Y01	TR,UMD2N-TR -CP
MAIN-P.W.Board			Q8004	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board			Q8006	48-09581Z04	TR,KTA1505S-GRRTK-CP
MAIN-P.W.Board			Q8100	48-19949Z01	TR,DRC5143X -CP
MAIN-P.W.Board			Q8101	48-09581Z04	TR,KTA1505S-GRRTK-CP
MAIN-P.W.Board		#1	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		#2	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		#3	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		#4	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		%1	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		%2	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		%3	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board		%4	Q8200	48-13000Z05	TR,LTC124EUBFS8-TLCP
MAIN-P.W.Board			R1000	06S15615Y17	RES,RK 47RJ 1/16 -CP
MAIN-P.W.Board			R1002	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1004	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1005	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1006	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R1007	06S15615Y33	RES,RK 221J 1/16 -CP
MAIN-P.W.Board			R1008	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1009	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1010	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1012	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1013	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1014	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1015	06S15615Y17	RES,RK 47RJ 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1017	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1018	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1019	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1020	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1021	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1022	06S15615Y77	RES,RK 153J 1/16 -CP
MAIN-P.W.Board			R1023	06S15615Y77	RES,RK 153J 1/16 -CP
MAIN-P.W.Board			R1024	06S45675W28	RES,RK 824J 1/10 -CP
MAIN-P.W.Board			R1025	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1026	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1027	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1028	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1029	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1030	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1031	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1032	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board			R1033	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1034	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1035	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1036	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1037	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1038	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1039	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R1040	06S15615Y43	RES,RK 561J 1/16 -CP
MAIN-P.W.Board			R1041	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1042	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1043	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board			R1044	06S15615Y33	RES,RK 221J 1/16 -CP
MAIN-P.W.Board			R1045	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1046	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1047	06S15616Y18	RES,RK 684J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1048	06S15615Y77	RES,RK 153J 1/16 -CP
MAIN-P.W.Board			R1049	06S15615Y83	RES,RK 273J 1/16 -CP
MAIN-P.W.Board			R1050	06S45674W61	RES,RK 152J 1/10 -CP
MAIN-P.W.Board			R1051	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1052	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R1054	06S15615Y63	RES,RK 392J 1/16 -CP
MAIN-P.W.Board			R1055	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1056	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R1057	06S15615Y85	RES,RK 333J 1/16 -CP
MAIN-P.W.Board			R1060	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R1061	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R1066	06S70072F90	RES,CP .1R0-J-1/4-CP
MAIN-P.W.Board			R1067	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R1070	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R1071	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1072	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1073	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1074	06S15615Y17	RES,RK 47RJ 1/16 -CP
MAIN-P.W.Board			R1078	06S15616Y36	RES,RK 225J 1/16 -CP
MAIN-P.W.Board			R2013	06S15615Y33	RES,RK 221J 1/16 -CP
MAIN-P.W.Board			R2014	06S15615Y33	RES,RK 221J 1/16 -CP
MAIN-P.W.Board			R2015	06S15593Y71	RES,RK 822F 1/10 -CP
MAIN-P.W.Board			R2016	06S15593Y71	RES,RK 822F 1/10 -CP
MAIN-P.W.Board			R2017	06S15593Y71	RES,RK 822F 1/10 -CP
MAIN-P.W.Board			R2018	06S15593Y71	RES,RK 822F 1/10 -CP
MAIN-P.W.Board			R2100	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R2101	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2102	06S15615Y33	RES,RK 221J 1/16 -CP
MAIN-P.W.Board			R2103	06S15615Y72	RES,RK 912J 1/16 -CP
MAIN-P.W.Board			R2104	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2105	06S15615Y25	RES,RK 101J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2106	06S15615Y75	RES,RK 123J 1/16 -CP
MAIN-P.W.Board			R2200	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R2201	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R2202	06S70072F35	RES,CP .181-J-1/4-CP
MAIN-P.W.Board			R2203	06S70072F35	RES,CP .181-J-1/4-CP
MAIN-P.W.Board			R2204	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R2205	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R2206	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R2207	06S15615Y91	RES,RK 563J 1/16 -CP
MAIN-P.W.Board			R2208	06S70072F35	RES,CP .181-J-1/4-CP
MAIN-P.W.Board			R2209	06S70072F35	RES,CP .181-J-1/4-CP
MAIN-P.W.Board			R2210	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R2211	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R5000	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5001	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#1	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#2	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#3	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#4	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#5	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$1	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$2	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$3	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$4	R5002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5004	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5005	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board		#1	R5006	06S15616Y06	RES,RK 224J 1/16 -CP
MAIN-P.W.Board		%1	R5006	06S15616Y06	RES,RK 224J 1/16 -CP
MAIN-P.W.Board			R5007	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R5008	06S15615Y25	RES,RK 101J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5009	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#2	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#3	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#4	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#5	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$1	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$2	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$3	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$4	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%2	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%3	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%4	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&1	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&2	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&3	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&4	R5010	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#1	R5011	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%1	R5011	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#5	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$1	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$2	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$3	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$4	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&1	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&2	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&3	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&4	R5012	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#1	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#2	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#3	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#4	R5013	06S15615Y73	RES,RK 103J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		%1	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%2	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%3	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%4	R5013	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%1	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%2	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%3	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%4	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&1	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&2	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&3	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		&4	R5014	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#1	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#2	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#3	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#4	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#5	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$1	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$2	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$3	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		\$4	R5015	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5016	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5017	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5018	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5019	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R5020	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R5023	06S15615Y59	RES,RK 272J 1/16 -CP
MAIN-P.W.Board			R5024	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5025	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5026	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5027	06S15615Y81	RES,RK 223J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5028	06S15615Y59	RES,RK 272J 1/16 -CP
MAIN-P.W.Board			R5029	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R5030	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R5031	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#1	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#5	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$1	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$2	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$3	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$4	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		%1	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&1	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&2	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&3	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&4	R5032	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R5033	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5034	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5036	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5045	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5046	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5048	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5049	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R5050	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R5051	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5052	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5053	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R5054	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#1	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		#5	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		\$1	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		\$2	R5100	06S15616Y22	RES,RK 105J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		\$3	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		\$4	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		%1	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		&1	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		&2	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		&3	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		&4	R5100	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board		#2	R5101	06S45675W30	RES,RK 105J 1/10 -CP
MAIN-P.W.Board		#3	R5101	06S45675W30	RES,RK 105J 1/10 -CP
MAIN-P.W.Board		#4	R5101	06S45675W30	RES,RK 105J 1/10 -CP
MAIN-P.W.Board		%2	R5101	06S45675W30	RES,RK 105J 1/10 -CP
MAIN-P.W.Board		%3	R5101	06S45675W30	RES,RK 105J 1/10 -CP
MAIN-P.W.Board		%4	R5101	06S45675W30	RES,RK 105J 1/10 -CP
MAIN-P.W.Board		#2	R5102	06S15615Y86	RES,RK 363J 1/16 -CP
MAIN-P.W.Board		#3	R5102	06S15615Y86	RES,RK 363J 1/16 -CP
MAIN-P.W.Board		#4	R5102	06S15615Y86	RES,RK 363J 1/16 -CP
MAIN-P.W.Board		%2	R5102	06S15615Y86	RES,RK 363J 1/16 -CP
MAIN-P.W.Board		%3	R5102	06S15615Y86	RES,RK 363J 1/16 -CP
MAIN-P.W.Board		%4	R5102	06S15615Y86	RES,RK 363J 1/16 -CP
MAIN-P.W.Board		#2	R5103	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board		#3	R5103	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board		#4	R5103	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board		%2	R5103	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board		%3	R5103	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board		%4	R5103	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board		#2	R5104	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#3	R5104	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#4	R5104	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		%2	R5104	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		%3	R5104	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		%4	R5104	06S45674W65	RES,RK 222J 1/10 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		#2	R5105	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board		#3	R5105	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board		#4	R5105	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board		%2	R5105	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board		%3	R5105	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board		%4	R5105	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board		#2	R5106	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		#3	R5106	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		#4	R5106	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		%2	R5106	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		%3	R5106	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		%4	R5106	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		#2	R5107	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		#3	R5107	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		#4	R5107	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		%2	R5107	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		%3	R5107	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		%4	R5107	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		#1	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#5	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$1	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$2	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$3	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$4	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		%1	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&1	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&2	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&3	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&4	R5108	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#2	R5109	06S45674W87	RES,RK 183J 1/10 -CP
MAIN-P.W.Board		#3	R5109	06S45674W87	RES,RK 183J 1/10 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		#4	R5109	06S45674W87	RES,RK 183J 1/10 -CP
MAIN-P.W.Board		%2	R5109	06S45674W87	RES,RK 183J 1/10 -CP
MAIN-P.W.Board		%3	R5109	06S45674W87	RES,RK 183J 1/10 -CP
MAIN-P.W.Board		%4	R5109	06S45674W87	RES,RK 183J 1/10 -CP
MAIN-P.W.Board			R5200	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R5201	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R5202	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R5203	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5204	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R5205	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R5207	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5208	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5209	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5210	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5211	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5212	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5213	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5214	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5215	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R5216	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		#2	R5217	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		#3	R5217	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		#4	R5217	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		%2	R5217	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		%3	R5217	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board		%4	R5217	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R6000	06S70072F05	RES,CP .10R-J-1/4-CP
MAIN-P.W.Board			R6001	06S15616Y14	RES,RK 474J 1/16 -CP
MAIN-P.W.Board			R6002	06S15616Y14	RES,RK 474J 1/16 -CP
MAIN-P.W.Board			R6003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R6004	06S15615Y65	RES,RK 472J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R6005	06S70072F13	RES,CP .22R-J-1/4-CP
MAIN-P.W.Board			R6006	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R6007	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R6008	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R7000	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R7001	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#1	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#2	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#3	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#4	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#5	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$1	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$2	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$3	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$4	R7002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#1	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#2	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#3	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#4	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#5	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$1	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$2	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$3	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$4	R7003	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#1	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#2	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#3	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#4	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#5	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$1	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$2	R7004	06S45675W43	RES,RK JUMPER1/10-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		\$3	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$4	R7004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#1	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#2	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#3	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#4	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		#5	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$1	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$2	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$3	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board		\$4	R7005	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R7006	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board		#1	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		#2	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		#3	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		#4	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		#5	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		\$1	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		\$2	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		\$3	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		\$4	R7010	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board		#1	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#2	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#3	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#4	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#5	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		\$1	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		\$2	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		\$3	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		\$4	R7011	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R8000	06S15615Y97	RES,RK 104J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R8001	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R8010	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R8011	06S15615Y97	RES,RK 104J 1/16 -CP
MAIN-P.W.Board			R8013	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R8016	06S15615Y93	RES,RK 683J 1/16 -CP
MAIN-P.W.Board			R8017	06S35095Y01	RES,RK 333J 1/4 -CP
MAIN-P.W.Board			R8018	06S35083Y34	RES,RK 562F 1/4 -CP
MAIN-P.W.Board			R8019	06S65415Y34	RES,RK 562F 1/16 -CP
MAIN-P.W.Board			R8020	06S65415Y43	RES,RK 333F 1/16 -CP
MAIN-P.W.Board			R8021	06S15615Y85	RES,RK 333J 1/16 -CP
MAIN-P.W.Board			R8022	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board			R8023	06S65415Y41	RES,RK 223F 1/16 -CP
MAIN-P.W.Board			R8024	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board			R8026	06S15615Y77	RES,RK 153J 1/16 -CP
MAIN-P.W.Board			R8028	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R8029	06S15615Y97	RES,RK 104J 1/16 -CP
MAIN-P.W.Board			R8031	06-02713Z18	RES,RK 153D 1/16 -CP
MAIN-P.W.Board			R8032	06-02713Z29	RES,RK 561D 1/16 -CP
MAIN-P.W.Board			R8033	06-02713Z65	RES,RK 512D 1/16 -CP
MAIN-P.W.Board			R8038	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R8039	06S55365Y66	RES,RK 112J 1/10 -CP
MAIN-P.W.Board			R8040	06S55366Y02	RES,RK 333J 1/10 -CP
MAIN-P.W.Board			R8041	06S55365Y83	RES,RK 562J 1/10 -CP
MAIN-P.W.Board			R8100	06S45674W90	RES,RK 243J 1/10 -CP
MAIN-P.W.Board			R8101	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R8102	06S15615Y97	RES,RK 104J 1/16 -CP
MAIN-P.W.Board		#1	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#2	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#3	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#4	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%1	R8200	06S15615Y73	RES,RK 103J 1/16 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		%2	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%3	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		%4	R8200	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board		#1	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		#2	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		#3	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		#4	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		%1	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		%2	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		%3	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		%4	R8201	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board		#1	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		#2	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		#3	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		#4	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		%1	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		%2	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		%3	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		%4	R8202	06S70072F61	RES,CP .222-J-1/4-CP
MAIN-P.W.Board		%1	R9000	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		%2	R9001	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		%3	R9001	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		%4	R9001	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&1	R9002	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&2	R9002	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&3	R9002	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		&4	R9003	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#1	R9004	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#2	R9005	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#3	R9005	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		#4	R9005	06S45675W43	RES,RK JUMPER1/10-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		#5	R9006	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$1	R9006	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$2	R9006	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$3	R9006	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		\$4	R9007	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			RA1000	06S15771Y45	RES,ARYEXB28V473J-CP
MAIN-P.W.Board			RA1001	06S15771Y45	RES,ARYEXB28V473J-CP
MAIN-P.W.Board			RA1002	06S15771Y33	RES,ARY 472J 4 -CP
MAIN-P.W.Board			RA1003	06S15771Y33	RES,ARY 472J 4 -CP
MAIN-P.W.Board			RA1004	06S15771Y45	RES,ARYEXB28V473J-CP
MAIN-P.W.Board			RA1005	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA1006	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA1007	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA1008	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA1009	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA1010	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA1011	06S15771Y45	RES,ARYEXB28V473J-CP
MAIN-P.W.Board			RA1015	06S15771Y45	RES,ARYEXB28V473J-CP
MAIN-P.W.Board			RA5001	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA5002	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			RA5003	06S15771Y13	RES,ARYEXB28V101J-CP
MAIN-P.W.Board			SA6000	48-00954Z03	VST,CSA30-401Q-T -CP
MAIN-P.W.Board			VT6000	24-17683Z01	COIL,IFT1 FM 5CCE-E6
MAIN-P.W.Board			VT8000	25-25218Z01	ASSY,A039A0001 -DB
MAIN-P.W.Board			XL1000	91-24701Z05	XTL,DSX321G 9.000-CP
MAIN-P.W.Board			XL1001	91-17788Z03	XTL,DST310S32.7NS-E1
MAIN-P.W.Board			XL1002	91-24701Z01	XTL,DSX321G 16.93-CP
MAIN-P.W.Board		#1	XL5000	91-17788Z03	XTL,DST310S32.7NS-E1
MAIN-P.W.Board		%1	XL5000	91-17788Z03	XTL,DST310S32.7NS-E1
MAIN-P.W.Board			XL5001	91-24701Z04	XTL,DSX321G 8.192-CP
MAIN-P.W.Board			XL6000	91-16024Z03	XTL,AT-41CD2 4.00-E9

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD1000	48-18196Z02	DIO,ZEN DZ2S051M0LCP
MAIN-P.W.Board			ZD1001	48-18196Z02	DIO,ZEN DZ2S051M0LCP
MAIN-P.W.Board			ZD5200	48-21149Z19	DIO,ZEN DZ2J051L0LCP
FRONT-P.W.Board			C401	08S35349Y12	CAP,CER 105K-B0J -CP
FRONT-P.W.Board			C402	08S35349Y12	CAP,CER 105K-B0J -CP
FRONT-P.W.Board			C403	08S65667Y03	CAP,CER 474KX5R1A-CP
FRONT-P.W.Board			C404	08S35374W12	CAP,CER 106K-B0J -CP
FRONT-P.W.Board			C405	08S45676W65	CAP,CER.222K-B1H -CP
FRONT-P.W.Board			C406	08S45676W65	CAP,CER.222K-B1H -CP
FRONT-P.W.Board			C407	08S45676W65	CAP,CER.222K-B1H -CP
FRONT-P.W.Board			CB401	09-18716Z01	BTB,DF20-P -EJ
FRONT-P.W.Board			D403	48-12230Z01	DIO,KDS226-RTK -CP
FRONT-P.W.Board			D404	48-12230Z01	DIO,KDS226-RTK -CP
FRONT-P.W.Board			D405	48-12230Z01	DIO,KDS226-RTK -CP
FRONT-P.W.Board			D406	48-12230Z01	DIO,KDS226-RTK -CP
FRONT-P.W.Board			D407	48-07015Z01	DIO,KDS160-RTK -CP
FRONT-P.W.Board			IC401	51-17831Z01	BU97500KV-E2 -QEA
FRONT-P.W.Board			IC402	51-18623Z01	PNJ4L02M -NE1
FRONT-P.W.Board			JK401	09-18872Z01	JAC,1850383000322-DB
FRONT-P.W.Board			LCD400	65-23741Z01	LCD,EH8470M0TTN-FZ
FRONT-P.W.Board		#1	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD400	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD400	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD400	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%2	LD400	48-11865Z03	LED,GRN SML-D12P8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		%3	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD400	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD400	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		#3	LD401	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD401	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		\$1	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		\$2	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		\$3	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		\$4	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		%1	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		%3	LD401	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD401	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		&2	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		&3	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		&4	LD401	48-15702Z01	LED,BLU SCM015BC7TCP
FRONT-P.W.Board		#1	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD402	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%3	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD402	48-11865Z01	LED,AMB SML-D12D8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		&1	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD402	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD403	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD403	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD403	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%2	LD403	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		%3	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD403	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD403	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD404	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD404	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD404	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD404	48-15238Z01	LED,RED SML-D13L8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		%2	LD404	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		%3	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD404	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD404	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD405	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%3	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD405	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD405	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD406	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD406	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD406	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD406	48-15238Z01	LED,RED SML-D13L8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		%2	LD406	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		%3	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD406	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD406	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD407	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD407	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD407	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%2	LD407	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		%3	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD407	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD407	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD408	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD408	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD408	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD408	48-15238Z01	LED,RED SML-D13L8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		\$3	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%2	LD408	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		%3	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD408	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD408	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD409	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#3	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD409	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		#5	LD409	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		\$1	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%2	LD409	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		%3	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD409	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD409	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD410	48-11866Z02	LED,GRN SMLE12EC6TCP
FRONT-P.W.Board		%2	LD410	48-11866Z02	LED,GRN SMLE12EC6TCP
FRONT-P.W.Board		#1	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD412	48-15238Z01	LED,RED SML-D13L8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		#4	LD412	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%3	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD412	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD412	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD413	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%3	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD413	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD413	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD414	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD414	48-15238Z01	LED,RED SML-D13L8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		\$3	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%3	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD414	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD414	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD415	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%3	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD415	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD415	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#1	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#3	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#4	LD416	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		\$1	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$2	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$3	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		\$4	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%1	LD416	48-15238Z01	LED,RED SML-D13L8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		%3	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		%4	LD416	48-11865Z01	LED,AMB SML-D12D8WCP
FRONT-P.W.Board		&1	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&2	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&3	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		&4	LD416	48-15238Z01	LED,RED SML-D13L8WCP
FRONT-P.W.Board		#2	LD421	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD421	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD421	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD422	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD422	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD422	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD423	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD423	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD423	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD424	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD424	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD424	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD425	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD425	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD425	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD426	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD426	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD426	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board			LD427	48-24837Z01	LED,ARY MDL463-011DB
FRONT-P.W.Board		#2	LD428	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD428	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD428	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD429	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD429	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD429	48-11865Z03	LED,GRN SML-D12P8WCP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		#2	LD430	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD430	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD430	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD431	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD431	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD431	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD432	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD432	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD432	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#2	LD433	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#5	LD433	48-11867Z01	LED,WHT SMLE12WBC7CP
FRONT-P.W.Board		%2	LD433	48-11865Z03	LED,GRN SML-D12P8WCP
FRONT-P.W.Board		#1	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		#2	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		#3	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		#4	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		%1	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		%2	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		%3	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		%4	Q400	48-13059Z01	TR,KTC2875-B-RTK -CP
FRONT-P.W.Board		#1	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		#2	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		#3	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		#4	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		%1	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		%2	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		%3	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		%4	Q402	48-20092Z01	TR,DMG563010R -CP
FRONT-P.W.Board		#1	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		#2	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		#3	R400	06S70072F61	RES,CP .222-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		#4	R400	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		#5	R400	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$1	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		\$2	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		\$3	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		\$4	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		%1	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		%2	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		%3	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		%4	R400	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		&1	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		&2	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		&3	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board		&4	R400	06S70072F61	RES,CP .222-J-1/4-CP
FRONT-P.W.Board			R401	06S35084Y39	RES,RK 153F 1/8 -CP
FRONT-P.W.Board			R402	06S35084Y44	RES,RK 393F 1/8 -CP
FRONT-P.W.Board			R403	06S35084Y78	RES,RK 132F 1/8 -CP
FRONT-P.W.Board			R404	06S35084Y39	RES,RK 153F 1/8 -CP
FRONT-P.W.Board		#2	R405	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#5	R405	06S70072F39	RES,CP .271-J-1/4-CP
FRONT-P.W.Board		%2	R405	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board			R406	06S35084Y78	RES,RK 132F 1/8 -CP
FRONT-P.W.Board			R407	06S35084Y28	RES,RK 182F 1/8 -CP
FRONT-P.W.Board			R408	06S35084Y31	RES,RK 332F 1/8 -CP
FRONT-P.W.Board			R409	06S35084Y29	RES,RK 222F 1/8 -CP
FRONT-P.W.Board			R410	06S35084Y64	RES,RK 432F 1/8 -CP
FRONT-P.W.Board			R411	06S35084Y68	RES,RK 752F 1/8 -CP
FRONT-P.W.Board		#3	R412	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		%3	R412	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		#1	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#2	R413	06S70072F49	RES,CP .681-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		#3	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#4	R413	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		#5	R413	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		\$1	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$2	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$3	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$4	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		%1	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		%2	R413	06S70072F49	RES,CP .681-J-1/4-CP
FRONT-P.W.Board		%3	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		%4	R413	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		&1	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		&2	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		&3	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		&4	R413	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#1	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		#3	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		#4	R414	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		\$1	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		\$2	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		\$3	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		\$4	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		%1	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		%3	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		%4	R414	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		&1	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		&2	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		&3	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		&4	R414	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		#1	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		#2	R415	06S45674W89	RES,RK 223J 1/10 -CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		#3	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		#4	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		%1	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		%2	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		%3	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		%4	R415	06S45674W89	RES,RK 223J 1/10 -CP
FRONT-P.W.Board		#1	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		#2	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		#3	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		#4	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		%1	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		%2	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		%3	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		%4	R416	06S45674W57	RES,RK 102J 1/10 -CP
FRONT-P.W.Board		#1	R417	06S70072F18	RES,CP .36R-J-1/4-CP
FRONT-P.W.Board		#2	R417	06S70072F18	RES,CP .36R-J-1/4-CP
FRONT-P.W.Board		#3	R417	06S70072F18	RES,CP .36R-J-1/4-CP
FRONT-P.W.Board		#4	R417	06S70072F27	RES,CP .82R-J-1/4-CP
FRONT-P.W.Board		#5	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		\$1	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		\$2	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		\$3	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		\$4	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		%1	R417	06S70072F18	RES,CP .36R-J-1/4-CP
FRONT-P.W.Board		%2	R417	06S70072F18	RES,CP .36R-J-1/4-CP
FRONT-P.W.Board		%3	R417	06S70072F18	RES,CP .36R-J-1/4-CP
FRONT-P.W.Board		%4	R417	06S70072F27	RES,CP .82R-J-1/4-CP
FRONT-P.W.Board		&1	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		&2	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		&3	R417	06S35095Y08	RES,RK JUMPER 1/4-CP
FRONT-P.W.Board		&4	R417	06S35095Y08	RES,RK JUMPER 1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board			R420	06S15615Y89	RES,RK 473J 1/16 -CP
FRONT-P.W.Board			R421	06S15615Y89	RES,RK 473J 1/16 -CP
FRONT-P.W.Board			R422	06S70072F45	RES,CP .471-J-1/4-CP
FRONT-P.W.Board			R423	06S70072F17	RES,CP .33R-J-1/4-CP
FRONT-P.W.Board			R424	06S70072F17	RES,CP .33R-J-1/4-CP
FRONT-P.W.Board			R425	06S15593Y87	RES,RK 393F 1/10 -CP
FRONT-P.W.Board			R426	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R427	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R428	06S15615Y49	RES,RK 102J 1/16 -CP
FRONT-P.W.Board			R429	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board		#1	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#3	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#4	R430	06S70072F67	RES,CP .392-J-1/4-CP
FRONT-P.W.Board		#5	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$1	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$2	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$3	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		\$4	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		%1	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		%3	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		%4	R430	06S70072F67	RES,CP .392-J-1/4-CP
FRONT-P.W.Board		&1	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		&2	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		&3	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		&4	R430	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board			R431	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board		#2	R432	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#5	R432	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		%2	R432	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#2	R434	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#5	R434	06S70072F41	RES,CP .331-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		%2	R434	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#1	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		#2	R435	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#3	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		#4	R435	06S70072F54	RES,CP .112-J-1/4-CP
FRONT-P.W.Board		#5	R435	06S70072F39	RES,CP .271-J-1/4-CP
FRONT-P.W.Board		\$1	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		\$2	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		\$3	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		\$4	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		%1	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		%2	R435	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		%3	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		%4	R435	06S70072F54	RES,CP .112-J-1/4-CP
FRONT-P.W.Board		&1	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		&2	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		&3	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		&4	R435	06S70072F48	RES,CP .621-J-1/4-CP
FRONT-P.W.Board		#1	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		#2	R436	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#3	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		#4	R436	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#5	R436	06S70072F39	RES,CP .271-J-1/4-CP
FRONT-P.W.Board		\$1	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		\$2	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		\$3	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		\$4	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		%1	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		%2	R436	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		%3	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		%4	R436	06S70072F57	RES,CP .152-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		&1	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		&2	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		&3	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		&4	R436	06S70072F50	RES,CP .751-J-1/4-CP
FRONT-P.W.Board		#1	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		#2	R437	06S70072F49	RES,CP .681-J-1/4-CP
FRONT-P.W.Board		#3	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		#4	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		#5	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		\$1	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		\$2	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		\$3	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		\$4	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		%1	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		%2	R437	06S70072F49	RES,CP .681-J-1/4-CP
FRONT-P.W.Board		%3	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		%4	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		&1	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		&2	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		&3	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		&4	R437	06S70072F63	RES,CP .272-J-1/4-CP
FRONT-P.W.Board		#1	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		#3	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		#4	R438	06S70072F54	RES,CP .112-J-1/4-CP
FRONT-P.W.Board		\$1	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		\$2	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		\$3	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		\$4	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		%1	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		%3	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		%4	R438	06S70072F54	RES,CP .112-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		&1	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		&2	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		&3	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		&4	R438	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		#1	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		#3	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		#4	R439	06S70072F56	RES,CP .132-J-1/4-CP
FRONT-P.W.Board		\$1	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		\$2	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		\$3	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		\$4	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		%1	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		%3	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		%4	R439	06S70072F56	RES,CP .132-J-1/4-CP
FRONT-P.W.Board		&1	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		&2	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		&3	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		&4	R439	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		#1	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		#3	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		#4	R440	06S70072F56	RES,CP .132-J-1/4-CP
FRONT-P.W.Board		\$1	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		\$2	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		\$3	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		\$4	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		%1	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		%3	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		%4	R440	06S70072F56	RES,CP .132-J-1/4-CP
FRONT-P.W.Board		&1	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		&2	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		&3	R440	06S70072F47	RES,CP .561-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		&4	R440	06S70072F47	RES,CP .561-J-1/4-CP
FRONT-P.W.Board		#2	R441	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		%2	R441	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		\$1	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		\$2	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		\$3	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		\$4	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		&1	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		&2	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		&3	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		&4	R442	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		#4	R443	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		%4	R443	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		#1	R444	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		%1	R444	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board			R445	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board		#5	R446	06S15616Y23	RES,RK JUMPER1/16-CP
FRONT-P.W.Board		#2	R447	06S70072F68	RES,CP .432-J-1/4-CP
FRONT-P.W.Board		%2	R447	06S70072F68	RES,CP .432-J-1/4-CP
FRONT-P.W.Board			R453	06S35084Y28	RES,RK 182F 1/8 -CP
FRONT-P.W.Board			R454	06S35084Y31	RES,RK 332F 1/8 -CP
FRONT-P.W.Board			R456	06S35084Y29	RES,RK 222F 1/8 -CP
FRONT-P.W.Board			R457	06S35084Y64	RES,RK 432F 1/8 -CP
FRONT-P.W.Board			R461	06S35084Y68	RES,RK 752F 1/8 -CP
FRONT-P.W.Board			R464	06S15615Y89	RES,RK 473J 1/16 -CP
FRONT-P.W.Board			R465	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R467	06S70072F29	RES,CP .101-J-1/4-CP
FRONT-P.W.Board		#2	R470	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		#5	R470	06S70072F46	RES,CP .511-J-1/4-CP
FRONT-P.W.Board		%2	R470	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		#2	R471	06S70072F57	RES,CP .152-J-1/4-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board		#5	R471	06S70072F52	RES,CP .911-J-1/4-CP
FRONT-P.W.Board		%2	R471	06S70072F57	RES,CP .152-J-1/4-CP
FRONT-P.W.Board		#2	R472	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board		#5	R472	06S70072F44	RES,CP .431-J-1/4-CP
FRONT-P.W.Board		%2	R472	06S70072F43	RES,CP .391-J-1/4-CP
FRONT-P.W.Board			RA401	06S15771Y13	RES,ARYEXB28V101J-CP
FRONT-P.W.Board			SK401	09-19382Z01	SKT,CM-V105 -DB
FRONT-P.W.Board			SW401	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW402	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW403	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW404	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW405	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW407	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW408	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW409	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW410	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW411	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW412	40-10735Z02	ENC,EC12D1524405 -DB
FRONT-P.W.Board			SW413	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW414	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW415	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW416	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW417	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			SW418	40T65353Y01	SW,TACT SKRSPACE010E2
FRONT-P.W.Board			Z401	91-14147Z01	EMI,ACM2012H-900 -CP
FRONT-P.W.Board			ZD401	48-18196Z02	DIO,ZEN DZ2S051M0LCP
FRONT-P.W.Board			ZD402	48-18196Z02	DIO,ZEN DZ2S051M0LCP
IF(DP86Z7BA)- P.W.Board			CB101	09T75287Y24	FFC,IMSA9631S-24Y-ED
IF(DP86Z7BA)- P.W.Board			PT500	48-19918Z01	PHT,TR TPS1191RB1-CP
IF(DP86Z7BA)-			PT502	48-19918Z01	PHT,TR TPS1191RB1-CP

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
P.W.Board					
IF(DP86Z7BA)- P.W.Board			R500	06S15615Y87	RES,RK 393J 1/16 -CP
IF(DP86Z7BA)- P.W.Board			R502	06S15615Y87	RES,RK 393J 1/16 -CP
SENSOR(DP86Z7BA)- P.W.Board			LD700	48-01591Z01	LED,AN1105W-1-TR -CP
SENSOR(DP86Z7BA)- P.W.Board			LD701	48-01591Z01	LED,AN1105W-1-TR -CP
SENSOR(DP86Z7BA)- P.W.Board			R700	06S45674W43	RES,RK 271J 1/10 -CP
SENSOR(DP86Z7BA)- P.W.Board			R701	06S45674W43	RES,RK 271J 1/10 -CP
DRIVE(DP86Z7BA)- P.W.Board			SW800	40T15494Y18	SW,DETCT SPVG1302-E6
Miscellaneous			HD1	EP-17785Z01	EP21A99N
Miscellaneous			M1	66-23978Z27	ASSY,MTR SPDL RF300
Miscellaneous			M2	66-23978Z28	ASSY,MTR SLED 2

Mark Model Code

- #1 CDE-141 Only,
- #2 CDE-171R Only,
- #3 CDE-171RR Only,
- #4 CDE-171RM Only,
- #5 CDE-142E Only,
- \$1 CDE-141E Only,
- \$2 CDE-141E(Arabia language) Only,
- \$3 CDE-141ETH Only,
- \$4 CDE-141C Only,
- %1 CDE-140 Only,
- %2 CDE-170R Only,
- %3 CDE-170RR Only,
- %4 CDE-170RM Only,
- &1 CDE-140E Only,
- &2 CDE-140E(Arabia language) Only,
- &3 CDE-140ETH Only,
- &4 CDE-140C Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.