


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to ▽ mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

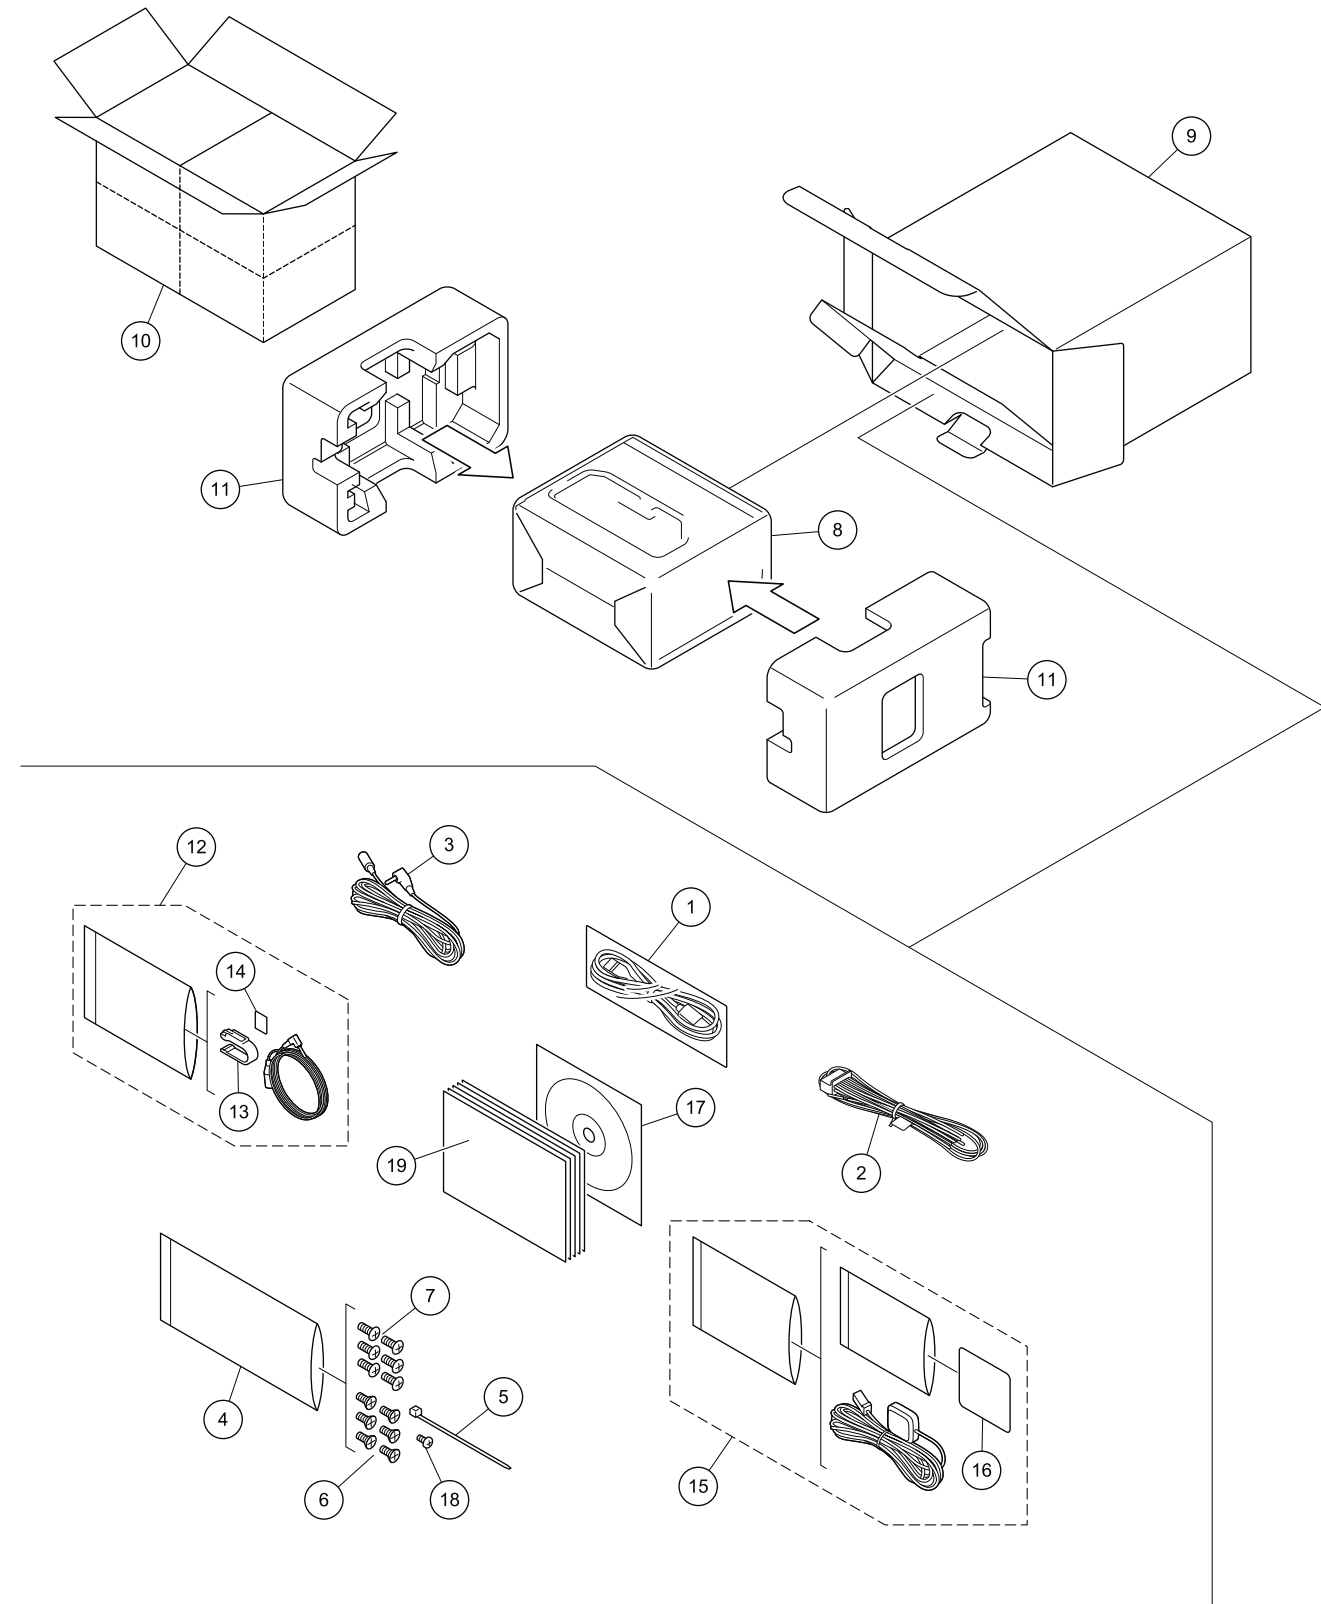

(1) PACKING SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	USB Extended Cable	CDP1587	13	Holder	CZN7192
2	Cord Assy	CDP1666	14	Cushion	CZN7193
3	Cable Assy	CDP1396	15	GPS Antenna Assy	CXE3204
4	Polyethylene Bag	CEG1160			
* 5	Lock Tie	CNW2429	16	Sheet	CZN8510
			17	IM CD-ROM	CPJ1483
6	Screw	CRZ50P090FTC	18	Screw	BPZ20P040FTC
7	Screw	TRZ50P080FTC	19-1	Quick Start Guide	CRB4353
8	Cover	CEG1359	19-2	Quick Start Guide/POC/FRE	CRB4354
9	Unit Box	See Contrast table (2)			
10	Contain Box	See Contrast table (2)	19-3	Important Information for Users	CRD4768
			19-4	Installation Manual	CRD4769
11	Protector	CHP4863	* 19-5	Registration Card	CRY1271
12	Microphone Assy	CPM1083	* 19-6	Warranty Card	QRY3001

(2) CONTRAST TABLE

AVIC-6000NEX/XNUC, AVIC-5000NEX/XNUC and AVIC-X8610BS/XNUC are constructed the same except for the following:

Mark	No.	Description	AVIC-6000NEX/XNUC	AVIC-5000NEX/XNUC	AVIC-X8610BS/XNUC
	9	Unit Box	CHG8537	CHG8533	CHG8540
	10	Contain Box	CHL8537	CHL8533	CHL8540

Quick Start Guide, Important Information for Users, Installation Manual

Part No.	Language
CRD4768	English, French
CRD4769	English, French
CRB4353	English
CRB4354	French

CONTENTS OF CD-ROM (Operation Manual), CPJ1483

Part No.	Language
* CRB4336	French
* CRB4339	English(Great Britain)
* CRB4340	French
* CRB4341	Italian
* CRB4342	Spanish(Espanol)
* CRB4343	German
* CRB4344	Dutch
* CRB4345	English(Great Britain)
* CRB4360	Portuguese(B)
* CRB4430	English

All operation manuals are supplied in PDF files by the CD-ROM.

Regarding the availability of paper manual, contact Pioneer Service representative in your region.

1 2 3 4

9.2 EXTERIOR (1)

A


B

C

D

E


F

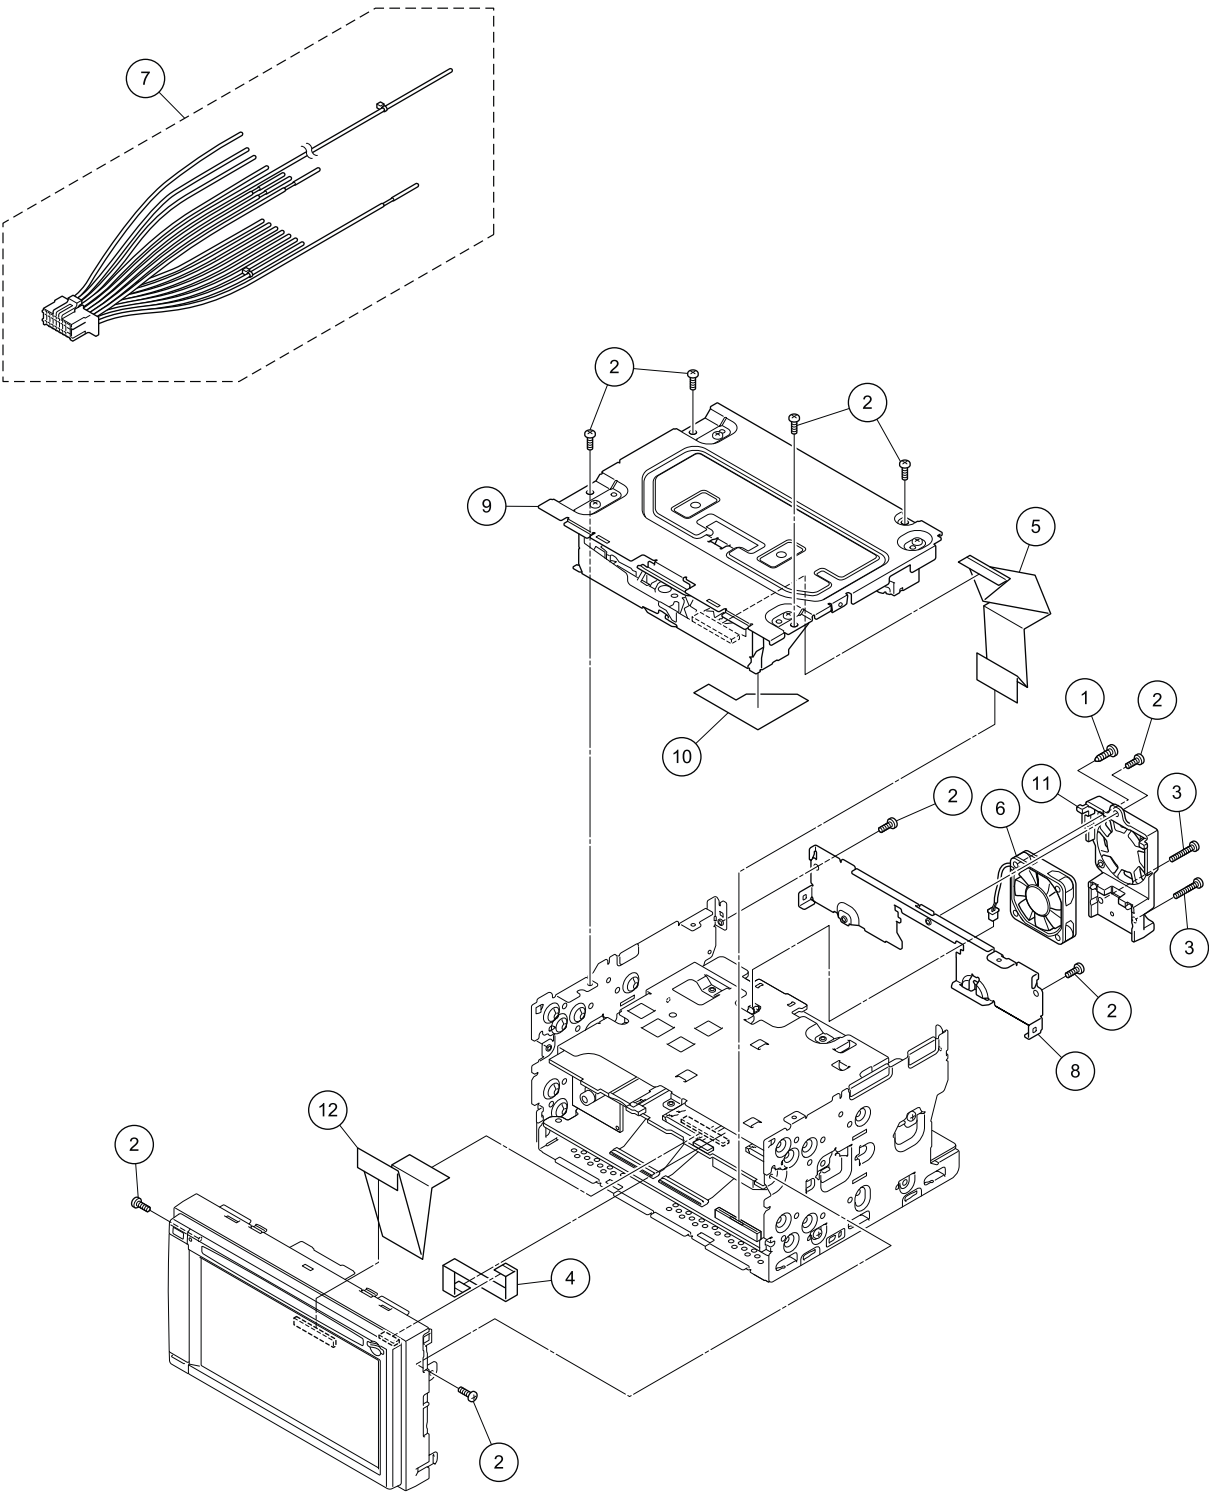

EXTERIOR (1) SECTION PARTS LIST

Mark No.	Description	Part No.	
1	Screw	BPZ30P080FTC	
2	Screw	BSZ26P060FTC	A
3	Screw	BSZ26P120FTC	
4	FFC	CDD1041	
5	FFC	CDD1033	
6	Fan Motor	CXM1446	
7	Cord Assy	CDP1666	
8	Holder	CND6989	
9	DVD Mechanism Module(LS2)	CXK8014	
10	Insulator	CNN4613	
11	Heat Sink	CNR2165	B
12	FFC	CDD1040	

9.3 EXTERIOR (2)

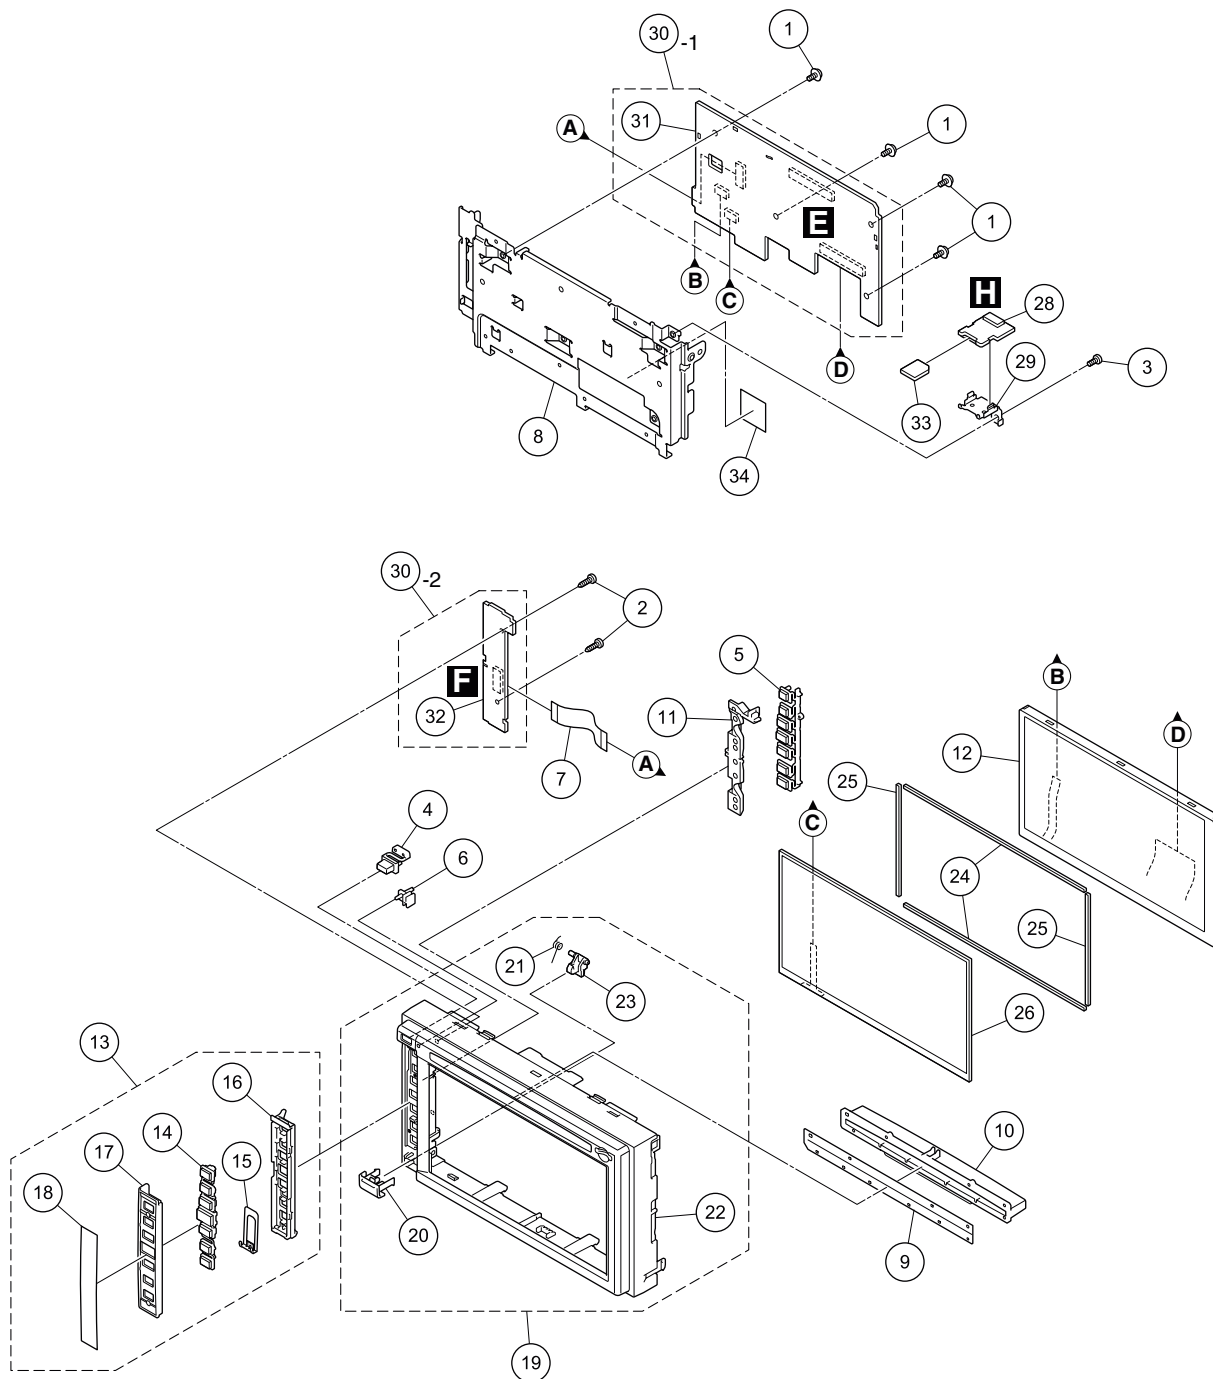


<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Screw	ASZ26P050FTC	* 18	Plate	CNU2671
2	Screw	BPZ20P060FTC	19	Grille Assy	See Contrast table (2)
3	Screw	BSZ26P050FTC	* 20	Button (DETACH)	See Contrast table (2)
4	Button (EJECT)	See Contrast table (2)			
5	Button	CAI4019	* 21	Coil Spring	CBH3111
			* 22	Grille	See Contrast table (2)
6	Button (RESET)	CAI4323	* 23	Arm	CNW2708
7	FFC	CDE9768	24	Cushion	CNN4273
8	Holder	CND7008	25	Cushion	CNN4274
9	Cover	CNN4623			
10	Holder	CNW3109	26	Touch Panel	CSX1184
			27		
11	Lighting Conductor	CNW3110	28	Micro SD Unit (Service)	CXX6356
12	TFT LCD	CWX4218	29	Holder	CND7009
13	Grille Assy	See Contrast table (2)	* 30	Monitor Unit	CWN8217
* 14	Button	CAI4324			
* 15	Plate Spring	CBL1845	31	Monitor Unit (Service)	CXX6365
			32	Key Unit (Service)	CXX6366
* 16	Cover	CNU2215	33	SD Memory Card (Service)	CXX6304
* 17	Grille	See Contrast table (2)	34	Sheet	CNN4869

(2) CONTRAST TABLE
 AVIC-6000NEX/XNUC, AVIC-5000NEX/XNUC and AVIC-X8610BS/XNUC are constructed the same except for the following:

Mark	No.	Description	AVIC-6000NEX/XNUC	AVIC-5000NEX/XNUC	AVIC-X8610BS/XNUC
	4	Button (EJECT)	CAI4017	CAI4017	CAI4018
	13	Grille Assy	CXE6979	CXE6979	CXE6980
*	17	Grille	CNU2670	CNU2670	CNU2214
	19	Grille Assy	CXE6981	CXE6984	CXE6987
*	20	Button (DETACH)	CAI4022	CAI4022	CAI4023
*	22	Grille	CNU2660	CNU2663	CNU2666

9.4 EXTERIOR (3)

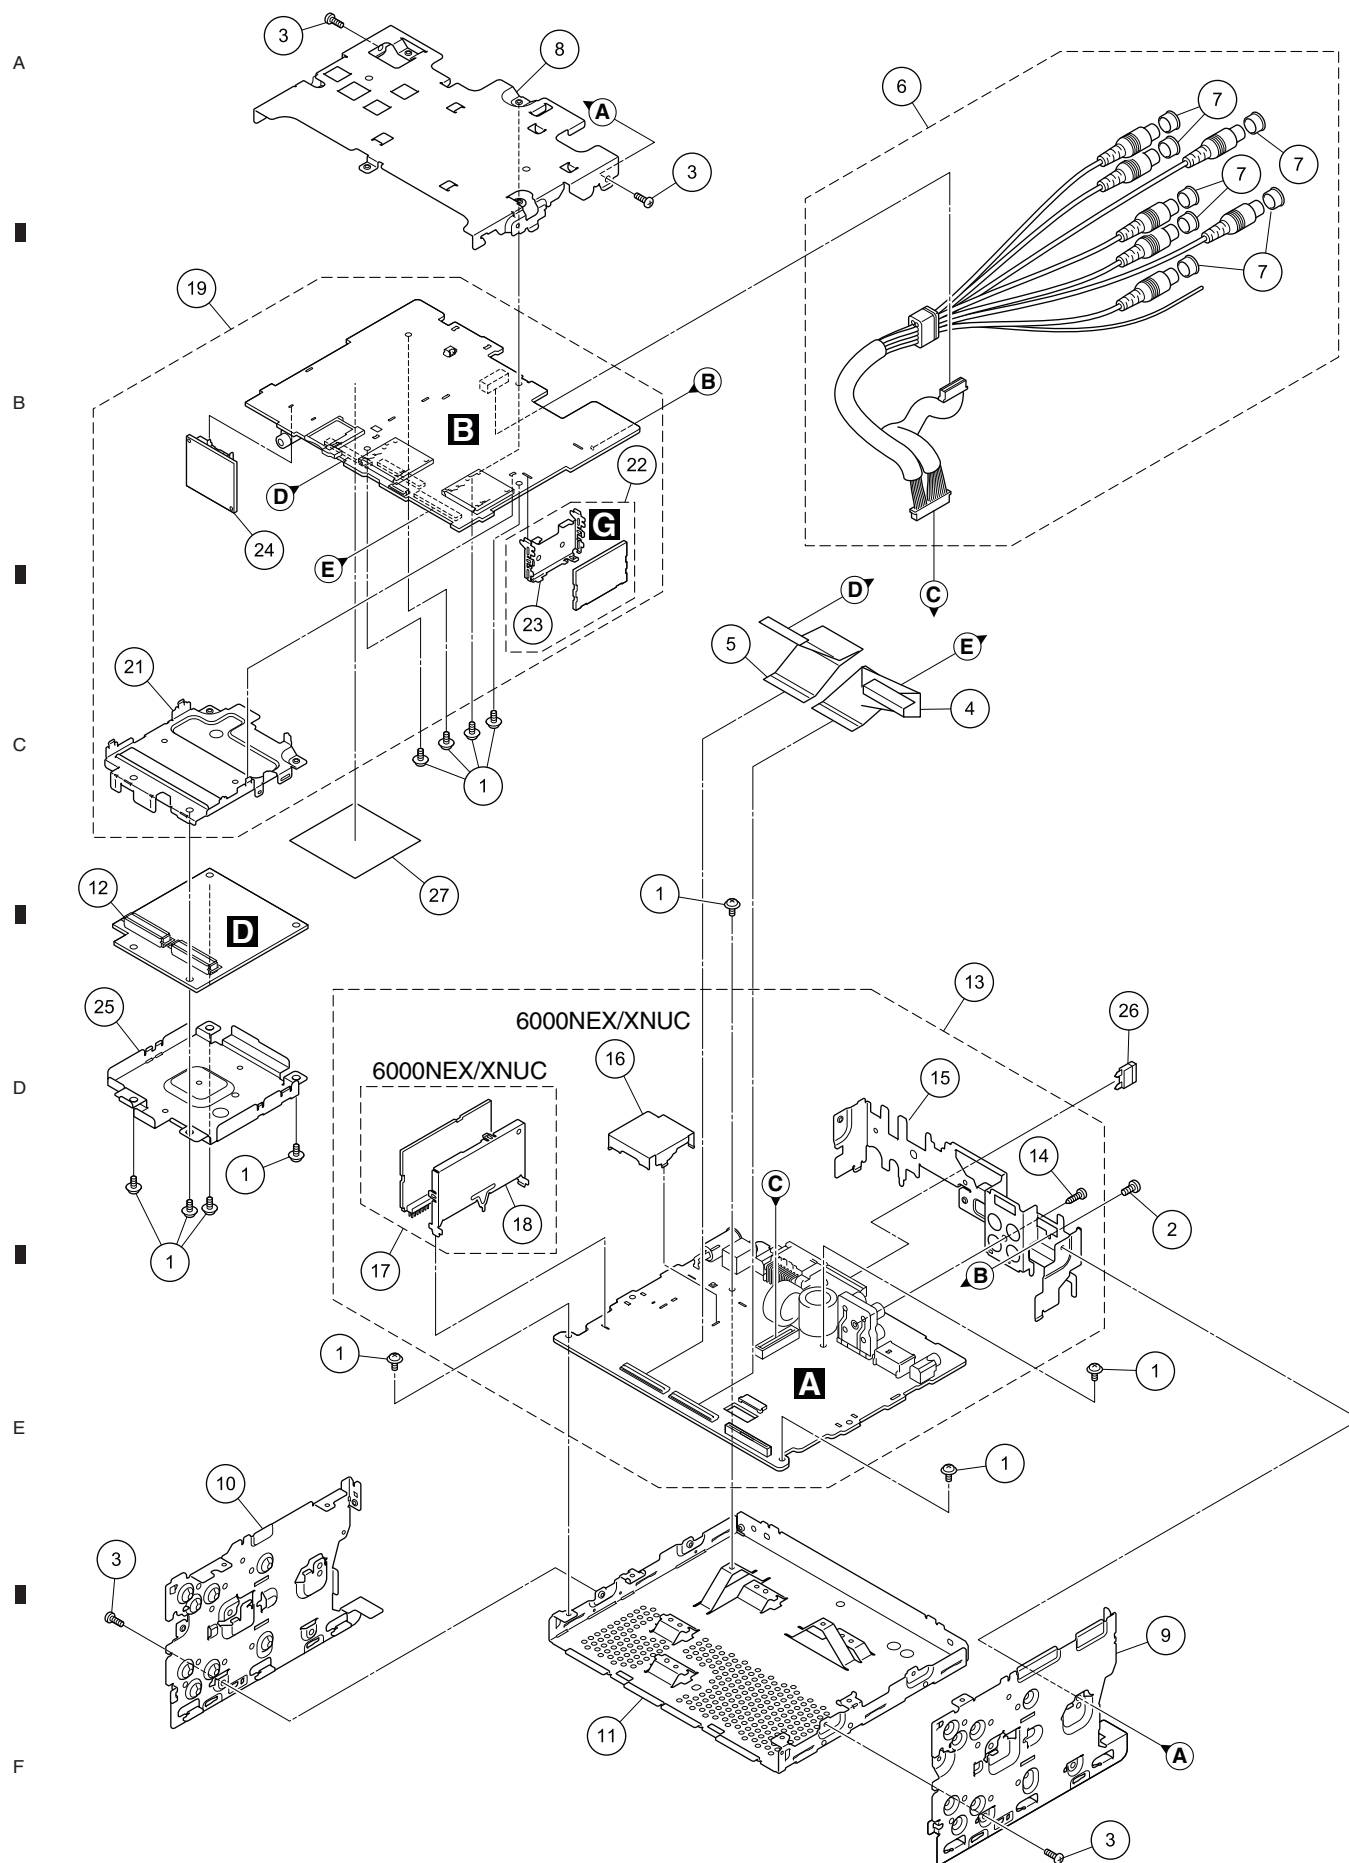


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	ASZ26P050FTC	15	Holder	See Contrast table (2)
2	Screw	BMZ30P060FTC	16	Shield Case	See Contrast table (2)
3	Screw	BSZ26P060FTC	17	Tuner Unit	See Contrast table (2)
4	FFC	CDD1035	18	Holder	See Contrast table (2)
5	FFC	CDD1036	19	IF Unit (Service)	See Contrast table (2)
6	Cable Assy	CDF1082	20		
7	Cap	CNV6727	21	Holder	CND6987
8	Holder	CND6984	22	Sensor Unit	CWX4472
9	Bracket	CND6985	23	Holder	CND6958
10	Bracket	CND6986	24	BT Module	CWX4529
11	Chassis	CNA3310	25	Shield Case	CND6988
12	SOC Dual Core Unit	CWN7890			
13	AV Unit	See Contrast table (2)	26	Fuse (10 A)	YEK5001
14	Screw	BPZ26P080FTC	27	Sheet	CNN4830

(2) CONTRAST TABLE
 AVIC-6000NEX/XNUC, AVIC-5000NEX/XNUC and AVIC-X8610BS/XNUC are constructed the same except for the following:

Mark	No.	Description	AVIC-6000NEX/XNUC	AVIC-5000NEX/XNUC	AVIC-X8610BS/XNUC
	13	AV Unit	CWN8178	CWN8181	CWN8642
	15	Holder	CND6992	CND6994	CND6994
	16	Shield Case	CND7003	Not used	Not used
	17	Tuner Unit	CWE2502	Not used	Not used
	18	Holder	CND6449	Not used	Not used
	19	IF Unit (Service)	CXX6339	CXX6342	CXX6346

9.5 DVD MECHANISM MODULE (1)

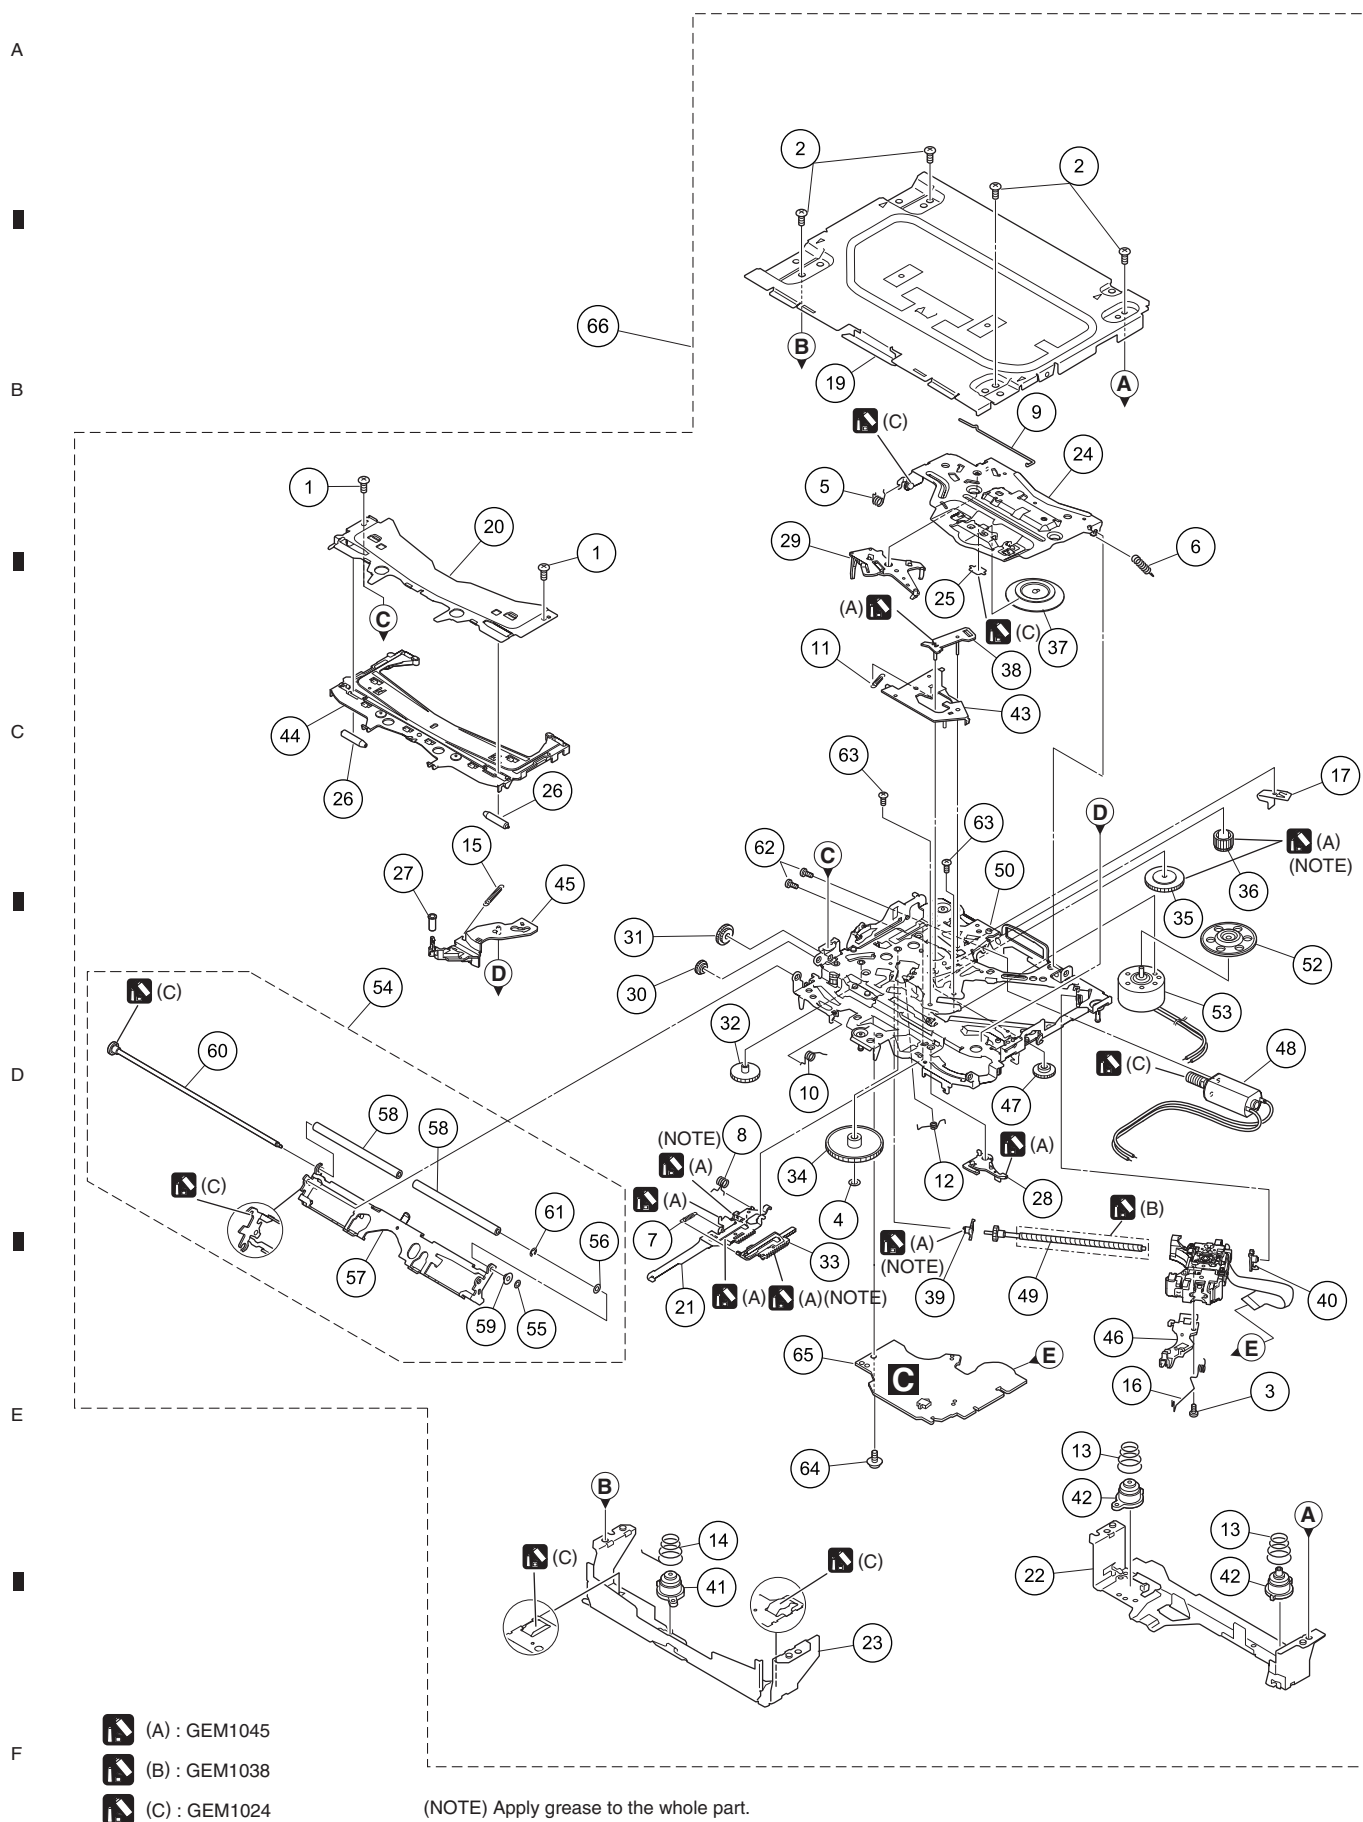

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Screw	BSZ20P040FTC	* 50	Chassis Unit	CXE6044	
2	Screw	BSZ26P060FTC				
3	Screw (M2 x 4)	CBA1835	51	*****		A
4	Washer	CBF1038	* 52	Support Wheel	CNW2052	
5	Spring	CBH2855	* 53	Spindle Motor(M2)	EXM2002	
			54	Arm Assy	CXE6232	
6	Spring	CBH2860	55	Washer	CBF1037	
7	Spring	CBH3010				
8	Spring	CBH3011	56	Washer	CBF1038	
9	Spring	CBH3014	57	Arm	CND6242	
10	Spring	CBH3015	58	Roller	CNW2500	
			59	Collar	CNW2444	
11	Spring	CBH3016	60	Gear Unit	CXE6225	B
12	Spring	CBH3017				
13	Spring	CBH3019	61	Washer	YE15FTC	
14	Spring	CBH3086	62	Screw	JFZ20P025FTC	
15	Spring	CBH3095	63	Screw	JGZ17P020FTC	
			64	Screw (M2 x 5)	EBA1028	
16	Spring	CBH3096	65	DVD Core Unit	CWX4496	
17	Plate Spring	CBL1824				
18	*****		66	Mechanism Unit(Service)	CXX6455	
19	Case	CNB3762	Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.			C
20	Bracket	CND4553				
21	Lever	CND5398				
22	Bracket	CND5710				
23	Bracket	CND6127				
24	Arm	CND6406				
25	Sheet	CNN3678				
26	Roller	CNW1172				
27	Roller	CNW1175				
28	Arm	CNW1177				
29	Arm	CNW1178				D
30	Gear	CNW1180				
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				
36	Gear	CNW1187				
37	Clamper	CNW1190				
38	Arm	CNW1192				E
39	Holder	CNW1193				
40	Holder	CNW1194				
41	Damper	CNW2439				
42	Damper	CNW2440				
43	Arm	CNW1726				
44	Guide	CNW2240				
45	Arm	CNW2241				
46	Rack	CNW2265				
47	Gear	CNW2287				F
48	Motor Unit(M1)(CRG(L/E))	CXC4026				
49	Screw Unit	CXC8894				

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J,RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by μ instead of μ . Please do not make a mistake.

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A:AVIC-6000NEX/XNUC	
B:AVIC-5000NEX/XNUC	
C:AVIC-X8610BS/XNUC	
Unit Number : CWN8178(A)	
Unit Number : CWN8181(B)	
Unit Number : CWN8642(C)	
Unit Name : AV Unit	
Unit Number : CXX6339(A)	
Unit Number : CXX6342(B)	
Unit Number : CXX6346(C)	
Unit Name : IF Unit(Service)	
Unit Number : CWX4496	
Unit Name : DVD Core Unit	
Unit Number : CWN7890	
Unit Name : SOC Dual Core Unit	
Unit Number : CXX6365	
Unit Name : Monitor Unit(Service)	
Unit Number : CXX6366	
Unit Name : Key Unit(Service)	
Unit Number : CWX4472	
Unit Name : Sensor Unit	
Unit Number : CXX6356	
Unit Name : Micro SD Unit(Service)	

<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	
Unit Number : CWN8178(A)	
Unit Number : CWN8181(B)	
Unit Number : CWN8642(C)	
Unit Name : AV Unit	

MISCELLANEOUS

IC 101	(A,55,103) IC	NJM2904V
IC 201	(A,95,135) IC	PA2032A
IC 302	(B,144,57) Regulator IC	MM3411A33N
IC 303	(B,160,47) IC	NJW4132U2-A
IC 304	(B,166,82) Regulator	BA00CC0WFP
IC 305	(B,151,45) Regulator IC	R1514S033B-AE
IC 501	(B,27,50) Regulator IC(A)	MM3479A33P
IC 502	(B,30,57) Regulator IC(A)	S-1172B12-E6
IC 504	(B,42,49) Regulator IC	MM3571A33P
IC 505	(B,38,42) Regulator IC(A)	MM3571A33P
IC 601	(A,64,45) ROM IC	CAT93C66VI
IC 602	(A,86,34) IC(A)	PEQ315A8
	(A,86,34) IC(B,C)	PEQ319A8
IC 603	(B,114,17) Reset IC	PST8229N
IC 801	(B,71,61) IC	AK4223VQ
IC 901	(B,47,28) IC	AK4223VQ
IC 902	(B,57,18) Dual OP-AMP	NJM4565V
IC 1002	(B,144,74) Dual OP-AMP	NJM4565V
IC 1003	(B,148,99) Dual OP-AMP	NJM4565V
IC 1005	(B,151,86) IC	TC4052BFT
IC 1101	(B,131,54) IC	AK7734XQ
IC 1201	(A,114,43) IC	WM8761BGED
IC 1202	(A,113,53) IC	WM8761BGED
IC 1203	(A,111,63) IC	WM8761BGED
IC 1301	(B,76,88) IC	PM9012A
IC 1501	(A,41,63) Tuner IC(A)	TEF6688HN
	(A,41,63) Tuner IC(B,C)	TEF6686HN
IC 1601	(A,34,44) Tuner IC(A)	TEF6686HN
Q 101	(B,64,105) Transistor	LSCR523UB
Q 102	(B,128,77) Chip Transistor	HN1C01FU
Q 104	(B,63,107) Transistor	LTC014EEB
Q 105	(B,48,103) Chip Transistor	HN1C01FU

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	Q 107 (B,60,105) Transistor	LSAR523UB	D 311 (B,167,43) Diode	RB551VM-30
A	Q 108 (B,54,105) Transistor	LSAR523UB	D 314 (B,163,95) Diode	CRG03
	Q 109 (A,49,105) Transistor	LTC014EEB	D 501 (B,33,53) Diode(A)	CRG03
	Q 110 (A,49,114) Transistor	LTC014EEB	D 601 (B,112,18) Diode	DA2J101
	Q 111 (B,57,103) Transistor	LTC014EEB	D 602 (B,90,23) Diode	RB501VM-40
	Q 201 (B,76,110) Transistor	RN4987	D 603 (B,90,30) Diode	DB2J31400
	Q 202 (B,71,108) Transistor	RN4987	D 604 (B,70,22) Diode	DB2J31400
	Q 203 (B,73,111) Transistor	LTA024EEB	D 1401 (B,19,102) Diode	EZAEG2A50AX
	Q 204 (B,81,112) Chip Transistor	RN1903	D 1402 (B,55,82) Diode(A)	DAN217UM
	Q 205 (B,85,110) Transistor	LSCR523UB	D 1404 (B,40,88) Diode(A)	RN779F
	Q 301 (B,156,38) Transistor	LTC014EEB	D 1501 (A,39,81) Diode	EZAEG2A50AX
B	Q 302 (B,159,37) Transistor	LSAR523UB	D 1502 (A,33,74) Diode	EZAEG2A50AX
	Q 312 (A,148,45) Transistor	LSCR523UB	D 2204 (A,25,112) Diode	DZ2J043M0
	Q 314 (B,121,37) Chip Transistor	2SB1689	L 101 (A,81,103) Choke Coil 600 uH	CTH1221
	Q 315 (B,120,34) Transistor	LSCR523UB	L 303 (A,166,39) Choke Coil 22 uH	CTH1561
	Q 602 (A,63,38) Transistor	LSCR523UB	L 901 (B,43,40) Inductor	CTF1786
	Q 1001 (B,151,81) Chip Transistor	RN1907	L 902 (B,44,40) Inductor	CTF1786
	Q 1401 (A,46,89) Transistor(A)	2SC3357	L 1101 (A,126,53) Ferrite Bead	CTF1528
	Q 1402 (B,47,88) Transistor(A)	LSAR523UB	L 1102 (A,140,51) Ferrite Bead	CTF1528
	Q 1403 (B,48,85) Transistor(A)	LSCR523UB	L 1201 (A,109,48) Inductor	CTF1786
	Q 1404 (B,56,89) Transistor(A)	2SC4083	L 1202 (A,106,58) Inductor	CTF1786
C	Q 1405 (B,54,87) Transistor(A)	2SC4083	L 1203 (A,110,69) Inductor	CTF1786
	Q 1501 (A,27,57) Transistor(A)	MMBT2369L	L 1204 (B,137,50) Chip Beads	VTL1132
	Q 1502 (A,27,54) Transistor(A)	MMBT2369L	L 1405 (A,43,92) Inductor(A)	CTF1794
	Q 1503 (A,34,57) Transistor(A)	MMBT2369L	L 1406 (A,38,92) Inductor(A)	LCTAW101J2520
	Q 1504 (A,33,54) Transistor(A)	MMBT2369L	L 1407 (A,43,86) Inductor(A)	LCYB47NJ1608
	Q 1801 (B,149,19) Chip Transistor	RN4982	L 1408 (A,50,90) Inductor(A)	LCYB22NJ1608
	Q 1802 (B,145,19) Chip Transistor	RN1910	L 1409 (A,50,77) Coil(A)	CTC1213
	Q 1804 (B,155,17) Transistor	2SB1260	L 1411 (A,59,82) Inductor(A)	CTF1786
	Q 1805 (B,151,15) Transistor	LTC014EEB	L 1501 (A,49,53) Inductor	CTF1749
	Q 1806 (A,149,23) IC	RZQ050P01	L 1503 (A,33,72) Chip Coil	LCTAW3R3J2520
D	Q 1807 (A,149,19) Transistor	LSCR523UB	L 1504 (B,25,95) Inductor	ATL7033
	Q 2201 (A,77,80) Chip Transistor	HN1C03FU	L 1505 (A,41,81) Inductor	LCMAR27J1608
	Q 2202 (A,74,84) Chip Transistor	HN1C03FU	L 1506 (A,29,72) Chip Coil	LCTAWR27J2520
	Q 2203 (B,168,105) Chip Transistor	HN1C03FU	L 1601 (A,30,32) Inductor(A)	CTF1749
	Q 2204 (B,127,92) Chip Transistor	HN1C03FU	L 1603 (A,52,44) Inductor(A)	LCMAR27J1608
	Q 2205 (A,30,110) Chip Transistor	2SD2114K	L 2201 (A,90,71) Ferrite Bead	CTF1528
	Q 2206 (A,23,111) Transistor	RN4984	L 2202 (A,100,71) Ferrite Bead	CTF1528
	Q 2207 (A,37,113) Transistor	RN4984	L 2203 (A,90,72) Ferrite Bead	CTF1528
	D 103 (B,68,109) Diode	UDZV6R2(B)	L 2204 (A,101,73) Ferrite Bead	CTF1528
	D 105 (B,126,80) Diode	DZ2J200M0	L 2205 (A,102,75) Ferrite Bead	CTF1528
E	D 106 (B,125,75) Diode	UDZV7R5(B)	L 2206 (A,90,75) Ferrite Bead	CTF1528
	D 107 (B,123,78) Diode	DAN202UM	L 2207 (A,100,75) Ferrite Bead	CTF1528
	D 109 (B,60,111) Diode	DA2J101	L 2208 (A,90,76) Ferrite Bead	CTF1528
	D 110 (B,75,135) Diode	1SR154-400	L 2209 (A,100,77) Ferrite Bead	CTF1528
	D 111 (B,72,135) Diode	1SR154-400	L 2210 (A,97,67) Ferrite Bead	CTF1528
	D 112 (B,47,107) Diode	DZ2J056M0	L 2211 (A,107,81) Chip Ferrite Bead	BTX1047
	D 113 (B,48,110) Diode	DZ2J180M0	X 601 (A,106,30) Resonator 3.932 16 MHz	CSS1772
	D 116 (B,57,106) Diode	DA2J101	X 1101 (B,132,64) Resonator 12.288 MHz	CSS1811
	D 118 (B,52,105) Diode	DA2J101	X 1501 (A,50,59) Crystal Transducer 9.216 MHz	CSS1863
	D 120 (A,54,111) Diode	DA2J101	X 1601 (A,35,36)Crystal Transducer 9.216 MHz(A)	CSS1863
F	D 122 (A,49,109) Diode	1SR154-400	⚠ P302 (B,166,96) Fuse 1.0 A	CEK1338
	D 123 (B,86,94) Diode	RB080L-30	P 1401 (B,20,102) Surge Absorber	IMSA-6803-01Y900
	D 124 (B,101,122) Diode	CRG03	P 2201 (A,109,77) Poly Switch	FSMD075-24R
	D 201 (B,90,113) Diode	DA2J101	P 2202 (B,160,124) Poly Switch	FSMD075-24R
	D 202 (B,72,115) Diode	DAN202UM	P 2203 (B,131,98) Poly Switch	FSMD075-24R
	D 203 (B,68,113) Diode	DAN202UM	P 2206 (B,137,97) Poly Switch	FSMD075-24R
	D 205 (B,89,110) Diode	DZ2J082M0	⚠ P2207 (A,90,100) Fuse 3.5 A	CEK1343
	D 206 (B,81,109) Diode	DA2J101	⚠ P2208 (A,103,88) Fuse 5.0 A	CEK1346
	D 303 (B,164,91) Diode	CRG03	BZ601 (A,162,28) Buzzer	CPV1062

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
CN1801	(A,149,7) Connector	VKN1620		R 201	(B,79,109)	RS1/16SS683J		
CN2001	(A,104,10) Connector	CKS6646		R 202	(B,88,113)	RS1/16SS102J		
CN2002	(A,67,10) Connector	CKS6646		R 205	(B,82,119)	RS1/16SS0R0J		A
CN2101	(A,153,115) Connector	CKS4497		R 207	(A,82,120)	RS1/16SS0R0J		
CN2201	(A,95,82) Connector	CKS6600		R 210	(A,105,125)	RS1/16SS0R0J		
JA101	(A,61,131) Connector	CKM1613		R 213	(B,83,108)	RS1/16SS683J		
JA1401	(A,12,119) Antenna Jack	YKS5041		R 214	(B,80,119)	RS1/16SS152J		
JA2202	(A,171,118) Jack	CKS6437		R 215	(B,81,119)	RS1/16SS101J		
JA2203	(A,127,112) RCA Jack	CKB1112		R 217	(B,86,113)	RS1/16SS473J		
JA2204	(A,27,130) Jack	AKN1073		R 218	(B,86,112)	RS1/16SS104J		
JA2205	(A,40,129) Jack	CKS6437		R 219	(B,84,112)	RS1/16SS472J		
VL1501	(A,40,73) Variable Coil	CTE1172		R 223	(B,101,57)	RS1/10SR0R0J		
VL1601	(A,44,44) Variable Coil(A) Tuner Unit(A)	CTE1172 CWE2502		R 224	(B,82,120)	RS1/16SS473J		
RESISTORS				R 311	(B,159,40)	RS1/16SS222J		B
				R 312	(B,157,39)	RS1/16SS222J		
				R 313	(B,157,34)	RS1/16SS473J		
				R 314	(B,170,86)	RS1/16SS6800D		
R 102	(B,124,86)	RS1/10SR224J		R 315	(B,170,85)	RS1/16SS3901D		
R 105	(B,67,106)	RS1/16SS473J		R 316	(B,170,87)	RS1/16SS2702D		
R 106	(B,66,107)	RS1/16SS473J		R 320	(B,160,86)	RS1/10SR0R0J		
R 107	(B,65,110)	RS1/16SS432J		R 323	(A,147,51)	RS1/10SR102J		
R 108	(B,65,114) 1 kohm	CCN1326						
R 109	(B,127,76)	RS1/16SS473J		R 324	(A,141,52)	RS1/10SR0R0J		
R 110	(B,128,79)	RS1/16SS103J		R 341	(A,146,47)	RS1/16SS471J		
R 111	(B,126,78)	RS1/16SS103J		R 342	(A,151,43)	RS1/16SS103J		
R 113	(B,128,74)	RS1/16SS473J		R 343	(A,148,43)	RS1/16SS682J		C
R 114	(B,62,111)	RS1/16SS103J						
R 115	(B,62,113)	RS1/16SS472J		R 346	(B,159,42)	RS1/16SS1303D		
R 116	(B,60,115)	RS1/4SA102J		R 347	(B,157,43)	RS1/16SS1002D		
R 117	(B,50,103)	RS1/16SS473J		R 354	(A,165,46)	RS1/10SR0R0J		
R 118	(B,48,105)	RS1/16SS473J		R 355	(B,158,56)	RS1/16SS0R0J		
R 119	(B,49,105)	RS1/16SS104J		R 358	(B,152,39)	RS1/10SR0R0J		
R 120	(B,50,108)	RS1/16SS472J		R 359	(B,155,41)	RS1/10SR0R0J		
R 121	(B,47,112)	RS1/10SR102J		R 361	(B,152,51)	RS1/10SR0R0J		
R 122	(B,58,109)	RS1/16SS102J		R 362	(B,119,37)	RS1/10SR103J		
R 123	(B,61,107)	RS1/16SS103J		R 363	(B,117,34)	RS1/10SR331J		
R 124	(B,61,103)	RS1/16SS223J		R 364	(B,123,33)	RS1/16SS103J		D
R 125	(B,54,111)	RS1/16SS103J		R 365	(B,123,36)	RS1/16SS103J		
R 126	(B,53,103)	RS1/16SS223J		R 366	(B,125,32)	RS1/16SS103J		
R 127	(B,56,107)	RS1/16SS102J		R 504	(B,26,31) (B,C)	RS1/16SS102J		
R 128	(B,54,108)	RS1/16SS103J		R 505	(B,24,50) (A)	RS1/16SS102J		
R 129	(B,51,112)	RS1/16SS103J		R 509	(B,31,61) (A)	RS1/16SS102J		
R 130	(A,51,103)	RS1/16SS104J		R 511	(B,37,46) (A)	RS1/16SS102J		
R 131	(A,50,103)	RS1/16SS473J		R 513	(B,25,32) (A)	RS1/16SS102J		
R 132	(A,50,102)	RS1/16SS563J		R 518	(A,71,70)	RS1/8SQ0R0J		
R 133	(A,54,106)	RS1/16SS513J		R 604	(A,71,40)	RS1/16SS104J		
R 134	(A,61,103)	RS1/16SS104J		R 605	(B,81,43)	RS1/16SS121J		
R 135	(A,62,103)	RS1/16SS513J		R 607	(B,109,15)	RS1/16SS104J		E
R 136	(A,60,102)	RS1/16SS513J		R 608	(B,99,33)	RS1/16SS104J		
R 137	(A,56,109)	RS1/16SS102J		R 609	(B,99,34)	RS1/16SS104J		
R 138	(A,60,105)	RS1/16SS102J		R 610	(A,101,31)	RS1/16SS100J		
R 139	(A,62,106)	RS1/16SS564J		R 611	(B,95,27)	RS1/16SS104J		
R 140	(A,51,112)	RS1/16SS822J		R 612	(B,109,16)	RS1/16SS102J		
R 141	(A,53,111)	RS1/16SS202J		R 613	(A,101,34)	RS1/16SS473J		
R 142	(A,52,113)	RS1/16SS203J		R 614	(A,95,53)	RS1/16SS681J		
R 143	(A,51,111)	RS1/16SS333J		R 615	(A,93,50)	RS1/16SS681J		
R 144	(A,45,111)	RS1/10SR0R0J		R 616	(B,98,25)	RS1/16SS101J		
R 145	(B,46,115)	RS1/4SA102J		R 617	(B,98,24)	RS1/16SS101J		F
R 149	(A,50,118)	RS1/10SR0R0J		R 618	(A,101,45)	RS1/16SS473J		
R 150	(B,50,115)	RS1/10SR0R0J		R 620	(B,99,22)	RS1/16SS472J		
				R 621	(B,99,21)	RS1/16SS471J		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 622	(A,97,50)	RS1/16SS473J	R 708	(A,90,51)	RS1/16SS681J
	R 623	(A,96,50)	RS1/16SS473J	R 709	(B,88,40)	RS1/16SS222J
	R 624	(A,95,50)	RS1/16SS473J			
	R 625	(B,99,26)	RS1/16SS182J	R 712	(A,81,52)	RS1/16SS221J
	R 627	(A,67,32)	RS1/16SS104J	R 713	(A,79,53)	RS1/16SS182J
				R 714	(A,80,52)	RS1/16SS221J
				R 715	(A,79,52)	RS1/16SS182J
	R 630	(B,90,19)	RS1/16SS102J			
	R 632	(B,100,26)	RS1/16SS182J			
	R 633	(B,98,40)	RS1/16SS0R0J	R 716	(B,77,23) (A,C)	RS1/16SS104J
	R 634	(A,69,45)	RS1/16SS0R0J	R 717	(A,78,19) (B)	RS1/16SS104J
				R 720	(A,86,50) (A)	RS1/16SS101J
	R 637	(B,88,15)	RS1/16SS101J	R 722	(B,79,43)	RS1/16SS121J
	R 639	(B,100,46)	RS1/16SS182J	R 723	(A,79,50) (A)	RS1/16SS104J
	R 640	(A,85,50)	RS1/16SS0R0J			
B	R 641	(A,89,53)	RS1/16SS101J	R 724	(A,76,49) (A)	RS1/16SS102J
	R 642	(A,82,50)	RS1/16SS102J	R 725	(A,71,49)	RS1/16SS102J
				R 726	(A,71,44)	RS1/16SS471J
	R 645	(B,98,46)	RS1/16SS182J	R 727	(B,73,44)	RS1/16SS104J
	R 646	(B,75,19)	RS1/16SS104J	R 728	(A,69,43) (A)	RS1/16SS101J
	R 647	(A,104,38)	RS1/16SS473J			
	R 648	(A,69,33)	RS1/16SS104J	R 729	(A,71,43) (A)	RS1/16SS101J
	R 649	(A,71,32) (A)	RS1/16SS104J	R 730	(B,81,24) (B,C)	RS1/16SS104J
				R 733	(B,82,22) (A,B)	RS1/16SS104J
				R 738	(A,66,38)	RS1/16SS104J
	R 651	(B,68,32)	RS1/16SS104J	R 739	(A,66,40)	RS1/16SS473J
	R 654	(A,71,24)	RS1/16SS101J			
	R 655	(A,70,24)	RS1/16SS101J			
	R 656	(A,70,27)	RS1/16SS0R0J	R 740	(B,89,22)	RS1/16SS103J
	R 657	(B,94,41)	RS1/16SS103J	R 741	(B,83,21) (C)	RS1/16SS104J
C				R 743	(A,65,36)	RS1/16SS222J
	R 659	(B,69,28)	RS1/16SS104J	R 744	(A,65,37)	RS1/16SS473J
	R 660	(A,88,53)	RS1/16SS101J	R 746	(B,71,18)	RS1/16SS0R0J
	R 661	(B,82,44) (A)	RS1/16SS681J			
	R 662	(A,87,50) (A)	RS1/16SS101J	R 748	(B,83,22) (A)	RS1/16SS104J
	R 663	(A,98,52)	RS1/16SS0R0J	R 750	(B,83,23)	RS1/16SS0R0J
				R 751	(B,82,32)	RS1/16SS0R0J
	R 665	(B,99,38)	RS1/16SS471J	R 752	(B,71,34)	RS1/16SS223J
	R 670	(B,98,22)	RS1/16SS472J	R 754	(B,70,33)	RS1/16SS223J
	R 671	(A,92,50)	RS1/16SS681J			
	R 673	(B,99,42)	RS1/16SS221J	R 755	(B,108,15)	RS1/16SS0R0J
	R 675	(B,98,21)	RS1/16SS471J	R 757	(A,68,24)	RS1/16SS101J
				R 761	(A,71,22)	RS1/16SS101J
	R 677	(A,102,44)	RS1/16SS0R0J	R 762	(A,72,24)	RS1/16SS101J
	R 678	(B,80,43)	RS1/16SS121J	R 763	(A,74,21)	RS1/16SS101J
D	R 679	(B,101,45)	RS1/16SS101J			
	R 680	(B,98,44)	RS1/16SS101J	R 769	(B,96,42)	RS1/16SS104J
	R 682	(A,102,40)	RS1/16SS680J	R 770	(B,84,19)	RS1/16SS104J
				R 775	(A,67,39)	RS1/16SS473J
				R 776	(B,76,22)	RS1/16SS104J
	R 684	(B,95,13)	RS1/16SS102J			
	R 685	(A,100,49)	RS1/16SS102J	R 779	(B,86,55)	RS1/16SS472J
	R 686	(A,102,23)	RS1/16SS681J	R 782	(B,90,33)	RS1/16SS1002D
	R 687	(A,103,23)	RS1/16SS0R0J	R 787	(B,78,29)	RS1/16SS104J
	R 688	(A,68,26)	RS1/16SS0R0J	R 789	(B,104,19)	RS1/16SS473J
				R 790	(B,105,19)	RS1/16SS473J
	R 690	(A,101,22)	RS1/16SS0R0J			
	R 691	(B,98,27)	RS1/16SS0R0J			
	R 693	(B,114,14)	RS1/16SS102J	R 792	(B,102,19)	RS1/16SS103J
	R 694	(B,99,32)	RS1/16SS104J	R 793	(B,75,27) (A)	RS1/16SS104J
E	R 695	(B,99,35)	RS1/16SS104J	R 796	(B,90,34)	RS1/16SS1001D
				R 797	(B,91,26)	RS1/16SS102J
	R 697	(A,102,38)	RS1/16SS471J	R 798	(A,104,60)	RS1/10SR0R0J
	R 698	(A,104,41)	RS1/16SS473J			
	R 699	(A,73,48)	RS1/16SS102J	R 801	(A,69,62)	RS1/16SS0R0J
	R 700	(A,68,50)	RS1/16SS472J	R 802	(A,71,62)	RS1/16SS0R0J
				R 803	(B,75,69)	RS1/16SS101J
	R 701	(A,74,47)	RS1/16SS102J	R 804	(B,75,70)	RS1/16SS101J
	R 702	(A,62,40)	RS1/16SS473J	R 805	(B,77,66)	RS1/16SS101J
	R 703	(A,71,47)	RS1/16SS102J			
F	R 704	(A,69,46)	RS1/16SS473J	R 806	(B,79,65)	RS1/16SS101J
	R 705	(A,71,48)	RS1/16SS473J	R 811	(B,60,55)	RS1/16SS223J
				R 812	(B,60,53)	RS1/16SS223J
	R 706	(B,92,52)	RS1/16SS473J	R 813	(B,59,60)	RS1/16SS223J
	R 707	(A,91,49)	RS1/16SS101J	R 814	(B,59,58)	RS1/16SS223J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 817	(B,64,74)	RS1/16SS223J		R 1061	(B,149,77)	RS1/10SR0R0J		
R 818	(B,61,68)	RS1/16SS223J		R 1062	(B,140,77)	RS1/10SR0R0J		
R 823	(B,69,53)	RS1/16SS104J		R 1063	(B,143,95)	RS1/10SR0R0J		A
R 824	(B,77,68)	RS1/16SS75R0D		R 1064	(B,153,95)	RS1/10SR0R0J		
R 825	(B,78,66)	RS1/16SS75R0D		R 1065	(B,150,67)	RS1/10SR0R0J		
				R 1066	(B,140,66)	RS1/10SR0R0J		
R 827	(B,79,57)	RS1/16SS2200D		R 1067	(B,147,64)	RS1/10SR0R0J		
R 829	(B,73,54)	RS1/16SS750J						
R 831	(B,80,63)	RS1/16SS104J		R 1068	(B,142,64)	RS1/10SR0R0J		
R 844	(B,66,73)	RS1/16SS101J		R 1101	(B,127,60)	RS1/16SS473J		
				R 1102	(B,132,61)	RS1/16SS222J		
R 845	(B,62,72)	RS1/16SS101J		R 1103	(B,122,52)	RS1/16SS473J		
R 846	(B,63,68)	RS1/16SS101J						
R 850	(B,61,61)	RS1/16SS101J		R 1104	(B,136,57)	RS1/16SS220J		
R 851	(B,61,59)	RS1/16SS101J		R 1106	(B,134,46)	RS1/16SS470J		
				R 1107	(B,140,55)	RS1/16SS101J		B
R 852	(B,61,58)	RS1/16SS101J		R 1109	(B,132,42)	RS1/8SQ102J		
R 853	(B,59,56)	RS1/16SS101J						
R 854	(B,61,54)	RS1/16SS101J		R 1110	(B,133,46)	RS1/8SQ102J		
R 855	(B,61,53)	RS1/16SS101J		R 1111	(B,131,46)	RS1/8SQ102J		
				R 1112	(B,137,57)	RS1/16SS220J		
R 859	(B,79,55)	RS1/16SS75R0D		R 1113	(B,140,57)	RS1/8SQ220J		
R 901	(A,46,29)	RS1/16SS0R0J						
R 910	(B,54,30)	RS1/16SS104J		R 1115	(B,127,47)	RS1/16SS0R0J		
R 920	(B,47,15)	RS1/16SS101J		R 1119	(B,138,55)	RS1/16SS104J		
R 921	(B,46,13)	RS1/16SS101J		R 1120	(B,124,60)	RS1/8SQ222J		
				R 1121	(B,122,60)	RS1/8SQ222J		
R 922	(B,46,15)	RS1/16SS101J		R 1122	(B,121,57)	RS1/16SS472J		
R 923	(A,45,27)	RS1/16SS0R0J						C
R 925	(B,59,13)	RS1/16SS273J		R 1123	(B,121,55)	RS1/16SS472J		
R 926	(B,60,15)	RS1/16SS473J		R 1124	(A,118,58)	RS1/8SQ0R0J		
				R 1205	(A,132,46)	RS1/10SR470J		
R 927	(B,60,16)	RS1/16SS621J		R 1206	(A,132,48)	RS1/10SR470J		
R 929	(B,58,24)	RS1/16SS104J		R 1207	(B,138,48)	RS1/10SR820J		
R 930	(B,55,14)	RS1/16SS104J						
R 931	(B,53,17)	RS1/16SS0R0J		R 1208	(B,139,51)	RS1/10SR470J		
R 944	(B,29,23)	RS1/10SR0R0J		R 1209	(B,138,52)	RS1/10SR470J		
				R 1210	(A,132,49)	RS1/10SR470J		
R 953	(B,35,10)	RS1/10SR0R0J		R 1212	(B,113,44)	RS1/8SQ821J		
R 954	(B,29,25)	RS1/10SR0R0J		R 1213	(B,117,46)	RS1/8SQ821J		
R 1007	(B,150,72)	RS1/16SS473J						
R 1008	(B,149,72)	RS1/16SS473J		R 1214	(B,110,56)	RS1/10SR821J		D
R 1009	(B,140,72)	RS1/16SS473J		R 1215	(B,111,54)	RS1/10SR821J		
				R 1217	(B,112,65)	RS1/10SR821J		
R 1010	(B,139,72)	RS1/16SS473J		R 1218	(A,121,48)	RS1/16SS0R0J		
R 1011	(B,143,100)	RS1/16SS473J		R 1219	(A,121,47)	RS1/16SS0R0J		
R 1012	(B,144,100)	RS1/16SS473J						
R 1013	(B,153,100)	RS1/16SS473J		R 1220	(B,111,49)	RS1/16SS0R0J		
R 1014	(B,154,100)	RS1/16SS473J		R 1221	(B,116,53)	RS1/16SS0R0J		
				R 1222	(B,113,59)	RS1/16SS0R0J		
R 1015	(B,145,71)	RS1/16SS0R0J		R 1301	(A,76,78)	RS1/10SR0R0J		
R 1016	(B,148,102)	RS1/16SS0R0J		R 1305	(B,90,118)	RS1/8SQ362J		
R 1017	(B,141,70)	RS1/16SS473J						
R 1018	(B,150,102)	RS1/16SS473J		R 1306	(B,87,117)	RS1/8SQ362J		E
R 1019	(B,148,70)	RS1/16SS473J		R 1307	(B,95,122)	RS1/8SQ362J		
				R 1308	(B,85,117)	RS1/8SQ362J		
R 1020	(B,146,102)	RS1/16SS473J		R 1309	(B,94,119)	RS1/16SS562J		
R 1023	(B,139,74)	RS1/16SS473J		R 1310	(B,88,119)	RS1/16SS562J		
R 1024	(B,154,98)	RS1/16SS473J						
R 1025	(B,150,74)	RS1/16SS473J		R 1311	(B,94,120)	RS1/16SS562J		
R 1026	(B,143,98)	RS1/16SS473J		R 1312	(B,86,119)	RS1/16SS562J		
				R 1402	(B,28,99)	RS1/16SS0R0J		
R 1027	(B,141,79)	RS1/16SS0R0J		R 1403	(A,42,91) (A)	RS1/16SS103J		
R 1028	(B,151,94)	RS1/16SS0R0J		R 1404	(A,39,89) (A)	RS1/4SA181J		
R 1040	(B,147,92)	RS1/16SS0R0J						
R 1044	(B,148,81)	RS1/16SS473J		R 1405	(A,40,86) (A)	RS1/10SR0R0J		
R 1047	(B,143,87)	RS1/16SS473J		R 1406	(A,50,92) (A)	RS1/10SR220J		F
				R 1407	(A,50,73) (A)	RS1/16SS101J		
R 1048	(B,142,87)	RS1/16SS473J		R 1408	(A,39,83) (A)	RS1/16SS0R0J		
R 1057	(B,153,92)	RS1/16SS0R0J		R 1409	(A,51,72) (A)	RS1/16SS0R0J		
R 1058	(B,148,82)	RS1/16SS473J		R 1410	(A,36,82) (B,C)	RS1/16SS0R0J		

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

R 1413 (B,34,90) (B,C)

RS1/16SS0R0J

R 1415 (B,23,102)

RS1/16SS0R0J

R 1417 (B,47,86) (A)

RS1/16SS472J

R 1418 (B,49,83) (A)

RS1/16SS271J

R 1420 (B,50,87) (A)

RS1/16SS220J

R 1421 (B,50,89) (A)

RS1/16SS472J

R 1422 (B,51,85) (A)

RS1/16SS223J

R 1423 (B,50,83) (A)

RS1/16SS474J

R 1425 (B,56,86) (A)

RS1/16SS681J

R 1426 (B,58,91) (A)

RS1/16SS271J

R 1427 (B,56,91) (A)

RS1/16SS561J

R 1437 (B,35,90) (A)

RS1/16SS0R0J

R 1439 (A,50,82) (A)

RS1/16SS0R0J

R 1441 (B,51,91) (A)

RS1/16SS471J

R 1444 (B,44,87) (A)

RS1/10SR821J

R 1445 (B,43,86) (A)

RS1/16SS473J

R 1447 (B,52,89) (A)

RS1/16SS0R0J

R 1448 (B,51,87) (A)

RS1/16SS132J

R 1449 (B,49,90) (A)

RS1/16SS751J

R 1453 (B,56,85) (A)

RS1/16SS0R0J

R 1502 (A,47,67)

RS1/16SS0R0J

R 1503 (A,36,69)

RS1/16SS0R0J

R 1505 (A,47,61)

RS1/16SS103J

R 1507 (A,46,61)

RS1/16SS103J

R 1508 (A,45,57)

RS1/16SS472J

R 1509 (A,44,55)

RS1/16SS472J

R 1510 (A,44,59)

RS1/16SS101J

R 1511 (A,43,59)

RS1/16SS101J

R 1512 (A,42,56)

RS1/16SS0R0J

R 1513 (A,32,71)

RS1/16SS101J

R 1514 (B,26,101)

RS1/16SS105J

R 1515 (B,25,97)

RS1/16SS105J

R 1516 (A,40,56) (A)

RS1/16SS0R0J

R 1517 (A,39,58) (A)

RS1/16SS0R0J

R 1518 (A,38,56) (A)

RS1/16SS0R0J

R 1519 (A,38,58) (A)

RS1/16SS0R0J

R 1520 (A,45,65)

RS1/16SS0R0J

R 1522 (A,27,59) (A)

RS1/16SS182J

R 1523 (A,29,57) (A)

RS1/16SS332J

R 1524 (A,26,50) (A)

RS1/16SS121J

R 1525 (A,29,55) (A)

RS1/16SS102J

R 1526 (A,36,62) (A)

RS1/16SS0R0J

R 1527 (A,34,60) (A)

RS1/16SS0R0J

R 1528 (A,37,57) (A)

RS1/16SS182J

R 1529 (A,32,56) (A)

RS1/16SS332J

R 1530 (A,36,53) (A)

RS1/16SS121J

R 1531 (A,31,55) (A)

RS1/16SS102J

R 1532 (A,31,62) (A)

RS1/16SS0R0J

R 1533 (A,31,59) (A)

RS1/16SS0R0J

R 1534 (A,29,62) (A)

RS1/16SS0R0J

R 1535 (A,29,61) (A)

RS1/16SS0R0J

R 1536 (A,29,53) (A)

RS1/16SS0R0J

R 1537 (A,31,53) (A)

RS1/16SS0R0J

R 1538 (A,30,58) (A)

RS1/16SS0R0J

R 1539 (A,37,59) (A)

RS1/16SS0R0J

R 1540 (A,41,51)

RS1/10SR0R0J

R 1542 (A,39,51)

RS1/10SR0R0J

R 1543 (A,29,66)

RS1/10SR0R0J

R 1545 (A,44,57)

RS1/16SS0R0J

R 1546 (A,43,57)

RS1/16SS0R0J

R 1547 (A,47,55)

RS1/8SQ0R0J

R 1548 (A,31,66)

RS1/10SR0R0J

R 1549 (B,48,62)

RS1/16SS0R0J

R 1550 (A,41,68)

RS1/16SS103J

R 1551 (A,40,68)

RS1/16SS0R0J

R 1552 (A,22,49) (A)

RS1/16SS0R0J

R 1602 (A,39,37) (A)

RS1/16SS0R0J

R 1603 (A,40,48) (A)

RS1/16SS0R0J

R 1604 (A,31,37) (A)

RS1/16SS103J

R 1606 (A,29,39) (A)

RS1/16SS103J

R 1608 (A,28,38) (A)

RS1/16SS472J

R 1609 (A,27,39) (A)

RS1/16SS472J

R 1610 (A,30,41) (A)

RS1/16SS101J

R 1611 (A,30,42) (A)

RS1/16SS101J

R 1612 (A,26,39) (A)

RS1/16SS0R0J

R 1613 (A,36,40) (A)

RS1/16SS0R0J

R 1615 (A,28,41) (A)

RS1/16SS0R0J

R 1616 (A,28,42) (A)

RS1/16SS0R0J

R 1617 (A,33,29) (A)

RS1/8SQ0R0J

R 1709 (A,21,53) (A)

RAB4CQ221J

R 1715 (A,21,39) (A)

RAB4CQ0R0J

R 1724 (A,9,82)

RS1/10SR0R0J

R 1725 (A,11,82)

RS1/10SR0R0J

R 1729 (A,22,23) (A)

RAB4CQ0R0J

R 1730 (A,23,25) (A)

RS1/16SS103J

R 1732 (A,43,112)

RS1/10SR0R0J

R 1733 (A,41,112)

RS1/10SR0R0J

R 1734 (A,15,23)

RS1/10SR0R0J

R 1735 (A,16,23)

RS1/10SR0R0J

R 1736 (B,35,64)

RS1/10SR0R0J

R 1737 (B,37,63)

RS1/10SR0R0J

R 1746 (B,19,12)

RS1/10SR0R0J

R 1747 (B,20,12)

RS1/10SR0R0J

R 1760 (B,56,31)

RS1/10SR0R0J

R 1761 (B,58,30)

RS1/10SR0R0J

R 1801 (B,151,21)

RS1/16SS102J

R 1805 (B,155,12)

RS1/16SS471J

R 1806 (A,156,12)

RS1/16SS221J

R 1807 (A,155,12)

RS1/16SS221J

R 1808 (A,154,12)

RS1/16SS221J

R 1809 (B,152,9)

RS1/16SS221J

R 1810 (A,152,11)

RS1/16SS221J

R 1814 (B,159,17)

RS1/10SR0R0J

R 1815 (A,161,19)

RS1/4SA0R0J

R 1816 (B,139,12)

RS1/16SS0R0J

R 1822 (B,152,17)

RS1/16SS473J

R 1823 (B,153,14)

RS1/8SQ561J

R 1826 (B,137,14)

RS1/16SS0R0J

R 1827 (A,152,21)

RS1/10SR103J

R 1828 (A,147,17)

RS1/16SS683J

R 1829 (A,147,19)

RS1/16SS683J

R 2002 (A,75,5)

RS1/16SS222J

R 2105 (A,150,105)

RS1/10SR102J

R 2107 (B,145,110)

RS1/16SS103J

R 2110 (A,160,106)

RS1/16SS0R0J

R 2111 (A,160,105)

RS1/16SS0R0J

R 2112 (A,160,103)

RS1/16SS0R0J

R 2113 (A,160,101)

RS1/16SS0R0J

R 2201 (A,75,80)

RS1/16SS820J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 2202	(A,81,82)	RS1/16SS820J		C 212	(B,79,112) 4.7 uF	CCG1201	
R 2203	(A,76,86)	RS1/16SS820J		C 216	(A,99,110) 4 700 uF/16 V	CCH2085	
R 2204	(A,80,86)	RS1/16SS820J		C 217	(A,65,111)	XCEVW101M16	
R 2205	(A,72,81)	RS1/16SS223J		C 218	(A,107,124)	CKSRYB104K50	
R 2206	(A,81,81)	RS1/16SS223J		C 219	(B,85,114)	CKSQYB105K16	
R 2207	(A,76,85)	RS1/16SS223J		C 220	(A,86,125) 0.1 uF	CCG1357	
R 2208	(A,79,85)	RS1/16SS223J		C 312	(A,168,84)	XCEVW101M16	
R 2209	(A,75,82)	RS1/16SS472J		C 313	(B,165,89)	CKSRYB105K16	
R 2210	(A,73,82)	RS1/16SS472J		C 314	(B,157,35)	CKSSYB104K10	
R 2211	(A,79,83)	RS1/16SS472J		C 317	(B,141,60)	CKSQYB104K25	
R 2212	(A,78,83)	RS1/16SS472J		C 318	(B,146,55)	CKSQYB104K25	
R 2213	(B,166,105)	RS1/16SS821J		C 320	(A,146,55)	XCEVW101M16	
R 2214	(B,168,102)	RS1/16SS472J		C 327	(A,145,44)	CKSSYB104K16	
R 2215	(B,167,106)	RS1/16SS223J		C 328	(A,148,47) 0.1 uF	CCG1266	
R 2216	(B,169,102)	RS1/16SS472J		C 329	(A,151,44)	CKSSYB102K50	
R 2217	(B,169,106)	RS1/16SS223J		C 335	(B,160,42)	CCSSCH101J50	
R 2218	(B,171,106)	RS1/16SS821J					
R 2219	(A,38,115)	RS1/16SS0R0J		C 336	(B,167,45) 10 uF	CCG1236	
R 2225	(B,22,107)	RS1/10SR0R0J		C 337	(B,163,53) 10 uF	CCG1236	
R 2226	(B,28,108)	RS1/10SR0R0J		C 339	(B,167,47) 10 uF	CCG1236	
R 2227	(B,30,128)	RS1/16SS0R0J		C 342	(B,152,41)	CKSSYB104K16	
R 2228	(B,31,128)	RS1/16SS0R0J					
R 2229	(B,25,129)	RS1/16SS0R0J		C 343	(B,150,50)	CKSRYB104K50	
R 2230	(B,42,116)	RS1/10SR0R0J		C 344	(B,144,60)	CKSRYB105K10	
R 2231	(B,38,116)	RS1/10SR0R0J		C 345	(B,148,55)	CKSRYB105K10	
R 2232	(B,125,89)	RS1/16SS820J		C 347	(B,123,35)	CKSSYB104K10	
R 2233	(B,130,94)	RS1/16SS820J		C 348	(B,150,38) 47 uF	CCG1251	
R 2234	(B,127,91)	RS1/16SS223J		C 349	(A,148,39)	XCEVW101M16	
R 2235	(B,127,94)	RS1/16SS223J		C 502	(B,26,45) (A)	CKSRYB105K10	
R 2236	(B,130,92)	RS1/16SS472J		C 503	(B,25,56) 4.7 uF(A)	CCG1201	
R 2237	(B,124,95)	RS1/16SS472J		C 504	(B,28,46) (A)	CKSRYB105K10	
R 2242	(A,33,112)	RS1/16SS103J		C 505	(B,34,56) 4.7 uF(A)	CCG1201	
R 2243	(A,31,108)	RS1/16SS122J		C 510	(B,38,50)	CKSRYB105K10	
R 2246	(A,23,108)	RS1/16SS152J		C 511	(B,47,50)	CKSRYB105K10	
R 2265	(A,108,88)	RS1/4SA0R0J		C 513	(B,39,45) (A)	CKSRYB105K10	
R 2266	(A,90,95)	RS1/4SA0R0J		C 514	(B,39,37) (A)	CKSRYB105K10	
R 2306	(B,150,121) (A)	RS1/16SS0R0J		C 516	(B,27,54) (A)	CKSSYB104K16	
R 2307	(B,146,120) (B)	RS1/16SS0R0J					
R 2308	(B,116,131)	RS1/16SS0R0J		C 602	(B,112,21)	CKSRYB105K10	
R 2318	(B,148,120) (C)	RS1/16SS0R0J		C 603	(A,103,30)	CCSRCH220J50	
				C 604	(A,101,29)	CCSSCH220J50	
				C 605	(A,103,43)	CKSSYB104K10	
				C 606	(A,101,23)	CKSSYB104K10	
				C 607	(B,99,28)	CKSSYB104K10	
				C 608	(B,94,31) 4.7 uF	CCG1331	
C 101	(B,125,86)	CKSRYB104K50		C 611	(B,83,24)	CKSSYB104K10	
C 104	(A,115,88) 15 000 uF/16 V	CCH1980		C 612	(A,85,49)	CKSSYB104K10	
C 106	(B,63,109)	CKSRYB105K10		C 613	(A,71,28)	CKSSYB104K10	
C 108	(B,48,108)	CKSSYB102K50					
C 110	(B,99,119)	CKSSYB104K16		C 615	(A,101,51)	CKSSYB104K10	
C 113	(A,56,107)	CKSSYB104K10		C 616	(A,101,53) 10 uF	CCG1192	
C 114	(A,60,103)	CKSSYB102K50		C 618	(B,99,40)	CCSSCH101J50	
C 115	(A,56,111)	CKSSYB104K16		C 620	(A,66,41)	CKSSYB104K10	
C 116	(A,56,113)	CKSSYB123K16		C 625	(B,114,12)	CKSSYB102K50	
C 117	(A,52,114)	CKSRYB823K16					
C 201	(B,92,121)	CKSQYB474K25		C 801	(B,77,57)	CKSSYB104K10	
C 202	(B,89,121)	CKSQYB474K25		C 802	(B,76,54)	CKSSYB104K10	
C 203	(B,97,121)	CKSQYB474K25		C 803	(A,68,66)	CKSRYB105K10	
C 204	(B,86,122)	CKSQYB474K25		C 804	(B,66,69)	CKSRYB105K10	
C 205	(A,100,124) 2.2 uF	DCH1229		C 805	(B,67,69)	CKSRYB105K10	
C 206	(A,88,121)	XCEVW100M16		C 806	(B,69,69)	CKSRYB105K10	
C 207	(B,115,126)	CKSRYB104K16		C 810	(A,68,65)	CKSSYB104K10	
				C 811	(B,66,66)	CKSRYB105K10	
				C 812	(B,76,67)	CKSSYB104K10	
				C 813	(B,63,71)	CKSRYB105K10	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	C 814 (B,77,65)	CKSSYB104K10	C 1003 (B,148,67)	CKSQYB105K16
	C 815 (B,63,69)	CKSRYB105K10	C 1004 (B,146,67)	CKSQYB105K16
	C 816 (B,77,64)	CKSSYB104K10	C 1005 (B,143,67)	CKSQYB105K16
	C 817 (B,62,66)	CKSQYB105K16	C 1006 (B,142,67)	CKSQYB105K16
	C 818 (B,77,63)	CKSSYB104K10	C 1007 (B,145,105)	CKSQYB105K16
■	C 819 (B,62,65)	CKSQYB105K16	C 1008 (B,147,105)	CKSQYB105K16
	C 820 (B,77,62)	CKSSYB104K10	C 1009 (B,150,105)	CKSQYB105K16
	C 821 (B,62,63)	CKSQYB105K16	C 1010 (B,151,105)	CKSQYB105K16
	C 822 (B,78,61)	CKSSYB104K10	C 1011 (B,141,71)	CCSSCH330J50
	C 823 (B,63,61)	CKSRYB105K10	C 1012 (B,150,101)	CCSSCH330J50
B	C 824 (B,78,60)	CKSSYB104K10	C 1013 (B,148,71)	CCSSCH330J50
	C 825 (B,63,60)	CKSRYB105K10	C 1014 (B,146,101)	CCSSCH330J50
	C 826 (B,78,59)	CKSSYB104K10	C 1015 (B,140,74)	CCSSCH330J50
	C 827 (B,63,58)	CKSRYB105K10	C 1016 (B,153,98)	CCSSCH330J50
	C 828 (B,78,58)	CKSSYB104K10	C 1017 (B,149,74)	CCSSCH330J50
■	C 829 (B,64,57)	CKSRYB105K10	C 1018 (B,144,98)	CCSSCH330J50
	C 830 (B,63,56)	CKSRYB105K10	C 1019 (B,142,77)	CKSRYB105K16
	C 831 (B,64,54)	CKSRYB105K10	C 1020 (B,151,96)	CKSRYB105K16
	C 832 (B,75,56)	CKSSYB104K10	C 1021 (B,141,76)	CKSSYB104K16
	C 833 (A,73,57) 10 uF	CCG1192	C 1022 (B,151,97)	CKSSYB104K16
C	C 834 (B,71,53)	CKSSYB104K10	C 1028 (B,147,89)	CKSSYB104K16
	C 835 (A,72,55)	CKSSYB104K10	C 1039 (B,152,90) 10 uF	CCG1234
	C 836 (A,69,60)	CKSQYB104K25	C 1040 (B,146,80) 10 uF	CCG1192
	C 837 (A,74,60)	CKSQYB104K25	C 1041 (B,154,91) 10 uF	CCG1192
	C 838 (A,69,57) 10 uF	CCG1192	C 1042 (B,153,93)	CKSRYB105K10
■	C 839 (A,74,59) 10 uF	CCG1192	C 1043 (B,145,89)	CKSRYB105K10
	C 840 (B,75,67)	CKSSYB104K10	C 1101 (B,130,62)	CCSSCH120J50
	C 841 (B,70,69)	CKSRYB105K10	C 1102 (B,134,62)	CCSSCH120J50
	C 842 (B,71,69)	CKSRYB105K10	C 1103 (B,125,49)	CKSRYB105K16
	C 843 (B,73,69)	CKSRYB105K10	C 1104 (B,126,58)	CKSSYB123K16
D	C 901 (A,43,26)	CKSRYB105K10	C 1105 (A,129,58)	CKSSYB104K16
	C 902 (B,39,26)	CKSRYB105K10	C 1106 (A,126,58)	CKSQYB225K10
	C 903 (B,37,27)	CKSRYB105K10	C 1107 (B,127,49)	CKSRYB105K16
	C 904 (B,39,27)	CKSRYB105K10	C 1108 (A,135,55)	CKSQYB104K25
	C 905 (B,37,28) (A)	CKSRYB105K10	C 1109 (A,131,52)	CKSQYB104K25
■	C 906 (B,39,29) (A)	CKSRYB105K10	C 1110 (A,130,54)	CKSQYB104K25
	C 907 (B,37,30) (A)	CKSRYB105K10	C 1111 (B,137,55)	CKSSYB103K16
	C 908 (A,44,26)	CKSSYB104K10	C 1112 (A,127,56)	CKSQYB104K25
	C 909 (B,43,20)	CKSRYB105K10	C 1113 (A,133,58)	CKSQYB104K25
	C 910 (B,44,17)	CKSRYB105K10	C 1114 (B,123,57) 10 uF	CCG1192
E	C 911 (B,45,20)	CKSRYB105K10	C 1115 (A,125,56) 10 uF	CCG1192
	C 912 (B,46,17)	CKSRYB105K10	C 1116 (A,138,52) 10 uF	CCG1192
	C 913 (B,46,20)	CKSRYB105K10	C 1117 (B,123,55) 10 uF	CCG1192
	C 914 (B,47,17)	CKSRYB105K10	C 1118 (B,124,63) 10 uF	CCG1192
	C 915 (A,52,31) 10 uF	CCG1192	C 1119 (B,122,63) 10 uF	CCG1192
■	C 916 (B,53,30)	CKSSYB104K10	C 1120 (A,136,52)	CKSQYB104K25
	C 917 (A,51,30)	CKSSYB104K10	C 1123 (B,135,59)	CCSSCH121J50
	C 918 (A,49,26)	CKSQYB104K25	C 1125 (B,136,61)	CCSSCH121J50
	C 919 (A,49,29)	CKSQYB104K25	C 1126 (B,137,62)	CCSSCH121J50
	C 920 (A,47,26) 10 uF	CCG1192	C 1201 (A,119,45)	CKSSYB104K16
F	C 921 (A,47,29) 10 uF	CCG1192	C 1202 (A,120,45) 10 uF	CCG1192
	C 922 (B,60,14)	CCSSCH100D50	C 1205 (B,112,48) 10 uF	CCG1192
	C 923 (B,54,17)	CKSSYB104K16	C 1207 (B,137,48)	CCSSCH470J50
	C 924 (B,57,25) 2.2 uF	CCG1218	C 1208 (B,142,51)	CCSSCH121J50
	C 926 (B,56,13) 10 uF	CCG1192	C 1209 (B,140,52)	CCSSCH121J50
■	C 927 (B,50,17)	CKSRYB105K10	C 1210 (A,117,56)	CKSSYB104K16
	C 928 (B,51,20)	CKSRYB105K10	C 1211 (A,119,56) 10 uF	CCG1192
	C 939 (B,48,20)	CKSRYB105K10	C 1216 (A,116,65)	CKSSYB104K16
	C 940 (B,49,17)	CKSRYB105K10	C 1217 (A,118,66) 10 uF	CCG1192
	C 941 (B,50,20)	CKSRYB105K10		

5

Circuit Symbol and No.

Part No.

C 1222 (B,115,45)

CKSRYB182K50

C 1223 (B,117,48)

CKSRYB182K50

C 1224 (B,105,57)

CKSRYB182K50

C 1225 (B,109,54)

CKSRYB182K50

C 1227 (B,113,67)

CKSRYB182K50

C 1229 (A,111,48)

CKSSYB104K16

C 1230 (A,107,56) 10 uF

CCG1192

C 1231 (A,108,58)

CKSSYB104K16

C 1232 (A,106,64) 10 uF

CCG1192

C 1233 (A,110,68)

CKSSYB104K16

C 1301 (B,82,89) 2.2 uF

CCG1218

C 1302 (B,82,87) 2.2 uF

CCG1218

C 1303 (B,89,81) 10 uF

CCG1192

C 1304 (B,83,80) 10 uF

CCG1192

C 1305 (B,81,92)

CKSRYB105K10

C 1306 (B,82,90)

CKSRYB105K10

C 1307 (B,69,92)

CKSRYB105K10

C 1308 (B,69,91)

CKSRYB105K10

C 1314 (A,70,98)

XCEVW100M16

C 1315 (B,69,89) 2.2 uF

CCG1218

C 1317 (A,70,91)

XCEVW100M16

C 1319 (B,85,80)

CKSQYB104K25

C 1321 (B,82,80)

CKSQYB104K25

C 1322 (A,81,75)

XCEVW470M16

C 1323 (A,70,76) Capacitor

CEVW470M25

C 1410 (A,51,91) (A)

CKSSYB103K16

C 1412 (A,47,86) (A)

CCSSCH270J50

C 1413 (A,37,87) (A)

CKSSYB103K16

C 1424 (B,39,92) (A)

CKSSYB103K16

C 1428 (B,52,83) (A)

CKSRYB105K16

C 1430 (B,53,83) (A)

CKSSYB222K50

C 1431 (B,57,84) (A)

CCSSCH220J50

C 1432 (B,57,91) (A)

CKSSYB102K50

C 1435 (B,55,85) (A)

CKSSYB103K25

C 1443 (B,42,86) (A)

CKSSYB472K25

C 1444 (B,40,91) (A)

CKSSYB391K50

C 1445 (B,51,90) (A)

CCSSCH220J50

C 1447 (B,28,102) (A)

CCSSCH100D50

(B,28,102) (B,C)

CKSSYB103K16

C 1501 (A,50,53)

CKSSYB104K16

C 1502 (A,51,55)

CKSSYB104K16

C 1503 (A,52,54) 10 uF

CCG1192

C 1504 (A,42,54) 10 uF

CCG1192

C 1505 (A,44,66)

CKSSYB104K16

C 1507 (A,43,67)

CKSSYB224K6R3

C 1508 (A,43,68)

CKSSYB102K50

C 1509 (A,39,66)

CKSSYB104K16

C 1511 (A,43,78)

CCSSCH220J50

C 1512 (A,38,78)

CCSSCH820J50

C 1515 (A,41,59)

CKSSYB104K16

C 1518 (A,33,69)

CCSSCH102J50

C 1519 (B,24,100)

CCSSCH471J50

C 1520 (B,27,95)

CCSSCK2R0C50

C 1521 (B,28,95)

CCSSCK1R0C50

C 1522 (A,29,70)

CCSSCH120J50

C 1523 (A,36,64)

CKSSYB152K50

C 1531 (A,30,70)

CCSSCK1R0C50

C 1533 (A,38,82)

CCSSCH100D50

C 1601 (A,32,31) (A)

CKSSYB104K16

C 1602 (A,32,33) (A)

CKSSYB104K16

7

Circuit Symbol and No.

Part No.

C 1603 (A,34,32) 10 uF(A)

CCG1192

C 1604 (A,26,36) 10 uF(A)

CCG1192

C 1605 (A,38,40) (A)

CKSSYB104K16

C 1607 (A,38,42) (A)

CKSSYB224K6R3

C 1608 (A,39,42) (A)

CKSSYB102K50

C 1609 (A,38,46) (A)

CKSSYB104K16

C 1611 (A,49,42) (A)

CCSSCH220J50

C 1612 (A,49,47) (A)

CCSSCH820J50

C 1613 (A,30,44) (A)

CKSSYB104K16

C 1617 (A,53,46) (A)

CCSSCH100D50

C 1705 (A,22,56) 10 uF(A)

CCG1192

C 1706 (A,21,56) (A)

CKSSYB104K10

C 1707 (A,22,45) 10 uF(A)

CCG1192

C 1708 (A,21,45) (A)

CKSSYB104K10

C 1711 (B,16,15) (A)

CKSSYB104K16

C 1801 (B,158,12)

CKSSYB104K10

C 1804 (B,162,15)

CKSSYB104K16

C 1805 (A,162,13)

CKSSYB104K16

C 1806 (B,153,9)

CCSSCH101J50

C 1813 (B,154,10)

CCSSCH101J50

C 1814 (B,157,7)

CCSSCH270J50

C 1815 (A,145,12)

CCSSCH270J50

C 1824 (B,87,82)

CKSQYB104K25

C 2201 (A,72,87) 10 uF

CCG1192

C 2202 (A,81,83) 10 uF

CCG1192

C 2203 (A,77,87) 10 uF

CCG1192

C 2204 (A,82,87) 10 uF

CCG1192

C 2205 (B,160,127)

CCSSCH101J50

C 2210 (B,124,93) 10 uF

CCG1192

C 2211 (B,132,92) 10 uF

CCG1192

C 2214 (A,27,110)

CKSSYB102K50

C 2220 (B,166,102) 4.7 uF

CCG1201

C 2221 (B,171,103) 4.7 uF

CCG1201

C 2225 (B,21,112)

CCSSCH270J50

C 2226 (B,27,131)

CCSSCH270J50

C 2227 (B,109,78)

CCSSCH270J50

C 2228 (A,104,74)

CCSSCH270J50

8

Circuit Symbol and No.

Part No.

C 1603 (A,34,32) 10 uF(A)

CCG1192

C 1604 (A,26,36) 10 uF(A)

CCG1192

C 1605 (A,38,40) (A)

CKSSYB104K16

C 1607 (A,38,42) (A)

CKSSYB224K6R3

C 1608 (A,39,42) (A)

CKSSYB102K50

C 1609 (A,38,46) (A)

CKSSYB104K16

C 1611 (A,49,42) (A)

CCSSCH220J50

C 1612 (A,49,47) (A)

CCSSCH820J50

C 1613 (A,30,44) (A)

CKSSYB104K16

C 1617 (A,53,46) (A)

CCSSCH100D50

C 1705 (A,22,56) 10 uF(A)

CCG1192

C 1706 (A,21,56) (A)

CKSSYB104K10

C 1707 (A,22,45) 10 uF(A)

CCG1192

C 1708 (A,21,45) (A)

CKSSYB104K10

C 1711 (B,16,15) (A)

CKSSYB104K16

C 1801 (B,158,12)

CKSSYB104K10

C 1804 (B,162,15)

CKSSYB104K16

C 1805 (A,162,13)

CKSSYB104K16

C 1806 (B,153,9)

CCSSCH101J50

C 1813 (B,154,10)

CCSSCH101J50

C 1814 (B,157,7)

CCSSCH270J50

C 1815 (A,145,12)

CCSSCH270J50

C 1824 (B,87,82)

CKSQYB104K25

C 2201 (A,72,87) 10 uF

CCG1192

C 2202 (A,81,83) 10 uF

CCG1192

C 2203 (A,77,87) 10 uF

CCG1192

C 2204 (A,82,87) 10 uF

CCG1192

C 2205 (B,160,127)

CCSSCH101J50

C 2210 (B,124,93) 10 uF

CCG1192

C 2211 (B,132,92) 10 uF

CCG1192

C 2214 (A,27,110)

CKSSYB102K50

C 2220 (B,166,102) 4.7 uF

CCG1201

C 2221 (B,171,103) 4.7 uF

CCG1201

C 2225 (B,21,112)

CCSSCH270J50

C 2226 (B,27,131)

CCSSCH270J50

C 2227 (B,109,78)

CCSSCH270J50

C 2228 (A,104,74)

CCSSCH270J50

B

Unit Number : CXX6339(A)

Unit Number : CXX6342(B)

Unit Number : CXX6346(C)

Unit Name : IF Unit(Service)

MISCELLANEOUS

IC 7003 (A,69,120) IC

IC 7004 (A,13,35) Regulator IC

IC 7008 (A,119,48) Regulator IC(A)

IC 7009 (B,141,75) Regulator IC

IC 7010 (A,83,45) Regulator IC

IC 7011 (B,27,79) IC

IC 7101 (B,53,71) IC

IC 7202 (A,98,108) IC

IC 7203 (A,92,87) IC

IC 7601 (B,163,30) IC

IC 7602 (B,141,26) IC

IC 7603 (B,139,55) IC

IC 7701 (B,43,38) Dual OP-AMP

NJM2387ADL3

MM3479A18P

MM3479A12P

MM3479A33P

MM3411A15N

AN33012UA

LTC3858EGN-1

AN33014UA

AN33014UA

WM8761BGED

WM8761BGED

WM8761BGED

NJM4565V

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

IC 7702 (A,13,20) IC
IC 7703 (B,144,66) AD Convtr IC

WM8761BGED
AK5357VT

D 8001 (B,132,101) Diode(A)
D 8002 (B,130,101) Diode(A)
D 8003 (B,130,99) Diode(A)
D 8004 (B,128,99) Diode(A)

EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX

A

IC 7704 (A,23,36) IC
IC 7705 (A,8,106) IC
IC 7706 (A,45,42) IC
IC 7709 (B,43,33) IC
IC 7901 (B,64,44) IC

TC4066BFT
NJU7043V
ML7247-001TBZ0
NJU7043V
BH7673G

D 8005 (B,128,101) Diode(A)
D 8006 (B,126,101) Diode(A)
D 8007 (B,125,99) Diode(A)
D 8008 (B,124,99) Diode(A)
D 8011 (B,117,99) Diode(A)

EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX

IC 7902 (B,68,44) IC
IC 7903 (A,66,44) IC
IC 7904 (A,62,45) IC
IC 7905 (A,82,62) LSI
IC 7906 (A,95,60) IC

BH7673G
BH7673G
BH7673G
ML86V7675TBZA3A
TC74LCX541FK

D 8012 (B,116,101) Diode(A)
D 8013 (A,114,77) Diode(A)
D 8014 (B,123,102) Diode(A)
D 8015 (A,124,79) Diode(A)
D 8016 (B,120,103) Diode(A)

EZAEG2A50AX
DA2J101
EZAEG2A50AX
DAN202UM
EZAEG2A50AX

B

IC 7907 (A,95,67) IC
IC 7909 (A,91,52) IC
IC 8001 (B,114,65) IC(A)
IC 8003 (A,125,67) IC(A)
IC 8103 (A,147,78) IC

TC7SZ125FU
TC7SZ125FU
MN864779KT
WM8761BGED
NJM2115V

D 8501 (A,11,87) Diode
D 8506 (B,144,101) Diode
D 8507 (B,142,105) Diode
D 8508 (B,144,103) Diode
D 8509 (B,142,104) Diode

DA2J101
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX

IC 8202 (B,49,25) IC(A)
IC 8501 (A,14,90) IC
IC 8502 (B,141,93) IC
IC 8504 (A,8,90) L-MOS And Gate
IC 8505 (A,25,120) L-MOS And Gate

TC7WZ34FK
TC7SH08FUS1
MAX14644ETA
TC7SET08FUS1
TC7SET08FUS1

L 7003 (A,31,63) Inductor
L 7101 (A,51,61) Inductor
L 7102 (A,51,82) Choke Coil 3.6 uH
L 7103 (B,35,77) Inductor
L 7201 (B,110,110) Inductor

CTH1544
CTH1482
CTH1479
CTF1738
CTH1524

C

IC 8506 (A,26,128) IC
IC 8507 (A,26,124) L-MOS And Gate
Q 7002 (A,72,110) Transistor
Q 7011 (A,108,47) IC
Q 7012 (A,114,48) Transistor
Q 7013 (A,22,68) Power MOS FET
Q 7014 (A,13,75) Chip Transistor

TC7SH08FUS1
TC7SET08FUS1
LTC014EEB
RZQ050P01
LSCR523UB
SFT1342
2SB1689

L 7202 (B,104,90) Inductor
L 7203 (B,103,113) Inductor
L 7204 (B,97,93) Inductor
L 7301 (B,84,45) Chip Ferrite Bead
L 7302 (B,89,45) Chip Ferrite Bead

CTH1524
CTF1793
CTF1793
BTX1046
VTL1183

D

Q 7015 (A,9,79) Transistor
Q 7016 (A,64,86) IC
Q 7017 (A,67,89) Transistor
Q 7101 (A,42,79) FET
Q 7102 (A,42,63) FET

LSCR523UB
RZQ050P01
LSCR523UB
FK8V03040
FK8V03040

L 7303 (B,144,34) Inductor
L 7304 (B,146,33) Inductor
L 7305 (B,149,31) Inductor
L 7306 (B,151,31) Inductor
L 7307 (B,153,32) Inductor

CTF1795
CTF1795
CTF1795
CTF1795
CTF1795

D

Q 7103 (A,39,79) FET
Q 7104 (A,39,63) FET
Q 7201 (A,140,72) Transistor
Q 7202 (A,145,69) Transistor
Q 7203 (A,142,74) Transistor

FK8V03050
FK8V03050
LTC014EEB
LSAR523UB
LTC014EEB

L 7308 (B,151,32) Inductor
L 7309 (B,139,45) Inductor
L 7310 (B,95,44) Inductor
L 7311 (B,96,46) Inductor
L 7312 (B,97,48) Inductor

CTF1795
CTF1795
CTF1795
CTF1795
CTF1795

E

Q 7204 (A,147,73) Transistor
Q 7703 (B,28,37) Transistor
Q 7704 (A,30,31) Transistor
Q 7705 (A,29,35) Transistor
Q 7901 (B,64,50) Transistor

LSAR523UB
LSCR523UB
LTC044EEB
LTC044EEB
LSCR523UB

L 7313 (B,97,45) Inductor
L 7314 (B,98,47) Inductor
L 7315 (B,98,48) Inductor
L 7501 (A,102,40) Resistor
L 7502 (A,152,50) Inductor

CTF1795
CTF1795
CTF1795
RS1/16SS0R0J
CTF1736

E

Q 7902 (B,68,50) Transistor
Q 7903 (A,66,50) Transistor
Q 7904 (A,62,51) Transistor
Q 7905 (B,60,54) Transistor
Q 8001 (A,120,92) Transistor(A)

LSCR523UB
LSCR523UB
LSCR523UB
LSCR523UB
LTC023EEB

L 7503 (A,124,13) Inductor
L 7601 (B,167,22) Inductor
L 7602 (B,137,20) Inductor
L 7603 (B,148,50) Inductor
L 7702 (A,21,17) Inductor

CTF1736
CTF1786
CTF1786
CTF1786
CTF1787

F

Q 8002 (A,118,96) Transistor(A)
Q 8003 (A,118,74) Chip Transistor(A)
Q 8101 (A,148,85) Transistor
Q 8501 (A,139,98) Transistor
D 7006 (A,27,72) Diode

LSAR523UB
RN4982
2SB1132
LSAR523UB
RB080L-30

L 7704 (B,153,65) Inductor
L 7705 (B,150,61) Inductor
L 7706 (B,46,43) Ferrite Bead
L 7707 (B,29,26) Chip Ferrite Bead
L 7708 (B,22,30) Resistor

CTF1558
CTF1558
CTF1528
BTX1047
RS1/10SR0R0J

F

D 7101 (B,46,68) Diode
D 7102 (B,46,66) Diode
D 7201 (B,99,113) Diode
D 7202 (B,93,92) Diode
D 7501 (B,128,30) Diode

DB2J41100
DB2J41100
RB060M-30
RB060M-30
RB501VM-40

L 7709 (A,11,11) Inductor
L 7902 (A,70,66) Chip Ferrite Bead
L 7903 (A,80,75) Chip Ferrite Bead
L 7904 (A,87,48) Chip Ferrite Bead
L 7905 (A,79,42) Chip Ferrite Bead

CTF1786
BTX1047
BTX1047
BTX1047
BTX1047

D 7502 (A,128,26) Diode

RB501VM-40

L 7906 (A,98,70) Chip Ferrite Bead

BTX1047

AVIC-6000NEX/XNUC

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
L 7907	(A,97,64) Chip Ferrite Bead	BTX1047		RESISTORS			
L 7908	(A,95,55) Chip Ferrite Bead	BTX1047					
L 7909	(A,97,66) Chip Beads	VTL1126					
L 7915	(A,86,52) Inductor	CTF1787					
L 7916	(A,83,52) Inductor	CTF1787		R 7001	(B,69,124)	RS1/4SA0R0J	A
L 7917	(A,91,66) Inductor	CTF1787		R 7008	(A,69,111)	RS1/16SS473J	
L 7918	(A,91,63) Inductor	CTF1787		R 7011	(A,70,111)	RS1/16SS2401D	
L 7919	(A,81,53) Inductor	CTF1787		R 7017	(A,70,113)	RS1/16SS8201D	
				R 7018	(A,72,112)	RS1/16SS2201D	
L 7920	(A,80,54) Inductor	CTF1787		R 7029	(A,17,33)	RS1/16SS102J	
L 7921	(A,78,52) Inductor	CTF1787		R 7032	(A,14,39)	RS1/8SQ0R0J	
L 7922	(A,82,72) Inductor	CTF1787		R 7035	(B,137,72)	RS1/16SS102J	
L 7923	(A,84,71) Inductor	CTF1787		R 7041	(A,114,45)	RS1/16SS683J	
				R 7049	(A,108,50)	RS1/10SR103J	
L 8001	(B,131,97) Filter(A)	CTF1834		R 7050	(A,112,47)	RS1/16SS683J	
L 8002	(B,124,97) Filter(A)	CTF1834		R 7056	(A,100,48)	RS1/8SQ0R0J	B
L 8003	(B,127,97) Filter(A)	CTF1834		R 7057	(A,103,46)	RS1/10SR331J	
L 8004	(B,129,97) Filter(A)	CTF1834		R 7066	(B,29,70)	RS1/16SS2702D	
L 8005	(B,111,74) Ferrite Bead(A)	CTF1528		R 7067	(B,29,71)	RS1/16SS1101D	
L 8006	(B,121,68) Chip Beads(A)	VTL1127		R 7068	(B,30,72)	RS1/16SS2701D	
L 8007	(B,121,66) Chip Beads(A)	VTL1127		R 7071	(A,19,78) 0.011 ohm	CCN1341	
L 8008	(B,121,65) Chip Beads(A)	VTL1127		R 7077	(B,31,73)	RS1/16SS1103D	
L 8009	(B,121,63) Chip Beads(A)	VTL1126		R 7078	(B,27,70)	RS1/16SS562J	
L 8011	(A,124,75) Inductor(A)	CTF1786		R 7079	(B,29,69)	RS1/16SS0R0J	
L 8012	(A,110,80) Inductor(A)	CTF1795		R 7082	(B,31,70)	RS1/16SS0R0J	
L 8101	(A,158,84) Inductor	LCYC1R0K2125		R 7086	(A,10,75)	RS1/16SS102J	
L 8102	(A,153,85) Chip Ferrite Bead	OTL8019		R 7087	(A,9,76)	RS1/16SS102J	C
L 8103	(B,153,76) Inductor	CTF1547		R 7088	(A,11,82)	RS1/16SS103J	
L 8104	(B,153,78) Inductor	CTF1547		R 7091	(B,25,73)	RS1/16SS0R0J	
L 8201	(B,56,19) Ferrite Bead	CTF1528		R 7092	(A,71,86)	RS1/16SS683J	
L 8202	(B,55,19) Ferrite Bead	CTF1528		R 7093	(A,70,89)	RS1/16SS683J	
L 8203	(B,54,19) Ferrite Bead	CTF1528		R 7094	(A,64,88)	RS1/10SR103J	
L 8204	(B,133,16) Ferrite Bead	CTF1528		R 7098	(A,9,81)	RS1/16SS103J	
L 8205	(B,70,23) Ferrite Bead	CTF1528		R 7099	(B,62,116)	RS1/4SA0R0J	
L 8401	(B,105,31) Inductor	CTF1731		R 7101	(B,50,56)	RS1/16SS0R0J	
L 8402	(B,103,31) Inductor	CTF1731		R 7102	(B,54,56)	RS1/16SS0R0J	
L 8403	(B,102,31) Inductor	CTF1731		R 7103	(B,57,77)	RS1/16SS0R0J	
L 8404	(B,100,31) Inductor	CTF1731		R 7104	(B,58,79)	RS1/16SS1502D	D
L 8405	(B,98,31) Inductor	CTF1731		R 7105	(B,59,78)	RS1/16SS4303D	
L 8501	(B,141,98) Choke Coil 90 ohm	CTH1319		R 7106	(B,59,76)	RS1/16SS8202D	
L 8502	(B,138,98) Choke Coil 90 ohm	CTH1319		R 7107	(B,57,56)	RS1/16SS104J	
X 7701	(A,40,51) Resonator 12.288 MHz	CSS1811		R 7109	(B,57,66)	RS1/16SS0R0J	
X 7901	(A,87,75) Crystal Resonator 32 MHz	CSS1818		R 7110	(B,58,65)	RS1/16SS1802D	
X 8001	(B,105,74) Resonator 27.000 MHz(A)	CSS1768		R 7111	(B,59,65)	RS1/16SS4703D	
P 7001	(B,62,122) Poly Switch	MINISMDC150F/24		R 7112	(B,59,67)	RS1/16SS1503D	
				R 7113	(B,61,76)	RS1/16SS562J	
CN7001	(A,52,115) Connector	CKS4977		R 7114	(B,57,57)	RS1/16SS0R0J	
CN7301	(B,100,39) Connector	CKS6547		R 7115	(B,60,73)	RS1/10SR0R0J	
CN7302	(B,137,39) Connector	CKS6549		R 7116	(B,61,67)	RS1/16SS392J	E
CN7501	(A,123,5) Connector	CKS6639		R 7117	(B,60,75)	RS1/10SR0R0J	
				R 7118	(B,59,70)	RS1/10SR0R0J	
CN7701	(B,21,21) Connector	CKS6346		R 7119	(B,59,69)	RS1/10SR0R0J	
CN8101	(B,162,82) Connector	CKS6599		R 7120	(B,56,58)	RS1/10SR334J	
CN8201	(B,66,12) Connector	CKS6646		R 7121	(B,59,58)	RS1/10SR274J	
CN8202	(B,84,118) Plug	CKM1599		R 7122	(B,58,72)	RS1/16SS104J	
				R 7123	(B,46,76)	RS1/10SR120J	
CN8203	(B,148,10) Connector	CKS6646		R 7124	(B,47,64)	RS1/10SR100J	
CN8401	(B,110,15) Connector	CKS6646		R 7125	(B,45,75)	RS1/10SR2R2J	
CN8502	(B,59,128) Connector	CKS6603		R 7128	(A,59,79) 15 mohm	CCN1328	F
JA7502	(A,156,33) Connector	CKS6438		R 7129	(A,60,79) 15 mohm	CCN1328	
JA8001	(B,126,110) Connector(A)	CKS6560		R 7130	(A,60,63) 12 mohm	CCN1321	
JA8102	(B,165,124) Connector	CKS5702					
JA8501	(B,148,117) Connector	DKN1417					
JA8502	(B,42,128) Connector	CKS6495					
JA8503	(B,11,128) Jack	CKN1040					

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 7131 (A,59,63) 12 mohm
 R 7132 (A,62,73)
 R 7133 (A,62,70)
 R 7134 (B,57,65)
 R 7135 (B,50,66)

CCN1321
 RS1/4SA0R0J
 RS1/4SA0R0J
 RS1/16SS0R0J
 RS1/16SS6R8J

R 7333 (B,133,44)
 R 7335 (B,133,33)
 R 7338 (B,131,30)
 R 7340 (B,131,27)
 R 7341 (B,137,46)
 R 7342 (B,132,28)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7136 (B,49,77)
 R 7202 (A,143,70)
 R 7203 (A,142,71)
 R 7206 (A,144,72)
 R 7207 (A,144,74)

RS1/16SS6R8J
 RS1/16SS222J
 RS1/16SS222J
 RS1/16SS222J
 RS1/16SS222J

R 7343 (B,138,45)
 R 7344 (B,134,32)
 R 7345 (B,138,46)
 R 7350 (B,130,28)
 R 7356 (B,96,33)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7211 (B,87,93)
 R 7212 (B,92,112)
 R 7213 (A,103,100)
 R 7214 (A,95,79)
 R 7215 (A,103,99)

RS1/8SQ0R0J
 RS1/8SQ0R0J
 RS1/16SS102J
 RS1/16SS102J
 RS1/16SS102J

R 7357 (B,130,30)
 R 7362 (B,111,31)
 R 7364 (B,110,33)
 R 7376 (B,118,44)
 R 7385 (B,113,28)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J
 RS1/16SS0R0J

R 7216 (A,95,78)
 R 7217 (A,103,98)
 R 7218 (A,94,102)
 R 7219 (A,95,77)
 R 7220 (A,88,81)

RS1/16SS102J
 RS1/16SS102J
 RS1/16SS152J
 RS1/16SS102J
 RS1/16SS152J

R 7386 (B,84,33)
 R 7387 (B,107,33)
 R 7388 (B,87,33)
 R 7389 (B,110,30)
 R 7390 (B,85,32)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7221 (A,103,97)
 R 7222 (A,95,76)
 R 7224 (A,94,103)
 R 7225 (A,92,103)
 R 7227 (A,89,105)

RS1/16SS102J
 RS1/16SS102J
 RS1/16SS3002D
 RS1/16SS2701D
 RS1/16SS8201D

R 7391 (B,108,33)
 R 7392 (B,88,32)
 R 7393 (B,94,46)
 R 7394 (B,87,31)
 R 7397 (B,129,33)

RS1/16SS0R0J
 RS1/16SS101J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7229 (A,88,82)
 R 7230 (A,86,82)
 R 7232 (A,84,85)
 R 7233 (A,95,114)
 R 7234 (A,89,93)
 R 7235 (A,91,104)

RS1/16SS3002D
 RS1/16SS2701D
 RS1/16SS8201D
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS752J

R 7398 (B,93,32)
 R 7399 (B,130,33)
 R 7400 (B,92,32)
 R 7401 (B,91,32)
 R 7403 (B,92,44)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7236 (A,85,83)
 R 7237 (B,108,104) 0.047 ohm
 R 7238 (B,102,84) 0.047 ohm
 R 7245 (A,104,105)
 R 7246 (A,98,85)

RS1/16SS103J
 CCN1167
 CCN1167
 RS1/16SS1001D
 RS1/16SS0R0J

R 7405 (B,93,46)
 R 7407 (B,131,33)
 R 7408 (B,94,44)
 R 7415 (B,94,33) (A)
 R 7416 (B,95,33) (A)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7247 (A,103,102)
 R 7248 (A,97,82)
 R 7249 (A,105,105)
 R 7250 (A,99,85)
 R 7251 (A,105,104)

RS1/16SS224J
 RS1/16SS224J
 RS1/16SS1202D
 RS1/16SS2202D
 RS1/16SS104J

R 7419 (B,141,48)
 R 7420 (B,140,45)
 R 7425 (B,142,45) (A)
 R 7426 (B,143,45) (A)
 R 7428 (B,144,44) (A)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS0R0J

R 7252 (A,99,83)
 R 7253 (A,112,104)
 R 7254 (A,106,84)
 R 7302 (A,127,44)
 R 7303 (A,124,43)
 R 7306 (B,126,44)

RS1/16SS104J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/10SR0R0J
 RS1/10SR0R0J
 RS1/16SS0R0J

R 7430 (B,144,46) (A)
 R 7433 (B,146,46)
 R 7435 (B,147,47)
 R 7437 (B,149,47)
 R 7439 (B,119,32)

RS1/16SS221J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS103J

R 7307 (B,91,49)
 R 7308 (B,127,46)
 R 7309 (B,92,46)
 R 7310 (B,127,44)
 R 7311 (B,128,46)

RS1/10SR0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7440 (B,151,45)
 R 7441 (B,151,44)
 R 7442 (B,120,33)
 R 7443 (B,127,32)
 R 7444 (B,126,31)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7315 (B,129,46)
 R 7317 (B,130,44)
 R 7323 (B,130,46) (A)
 R 7325 (B,131,44) (A)
 R 7327 (B,132,48) (A)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7445 (B,125,31)
 R 7446 (B,124,31)
 R 7447 (B,122,31)
 R 7448 (B,122,32)
 R 7449 (B,121,31)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7329 (B,132,44) (A)
 R 7330 (B,132,46) (A)
 R 7331 (B,134,44)
 R 7332 (B,133,48)

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

R 7456 (B,83,30)
 R 7457 (B,113,30)
 R 7458 (B,114,31)
 R 7459 (B,115,31)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

1

2

3

4

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
R 7460 (B,116,32)	RS1/16SS103J	R 7707 (A,6,115)	RS1/16SS0R0J
R 7461 (B,117,32)	RS1/16SS103J	R 7708 (B,29,23)	RS1/16SS101J
R 7463 (B,150,46)	RS1/16SS0R0J	R 7710 (B,30,26)	RS1/16SS101J
R 7470 (B,112,32)	RS1/16SS0R0J	R 7714 (B,27,41)	RS1/16SS102J
R 7482 (B,54,114)	RS1/16SS0R0J	R 7715 (B,27,34)	RS1/16SS0R0J
R 7483 (B,59,114)	RS1/16SS0R0J		
R 7484 (B,128,25)	RS1/16SS104J	R 7716 (A,44,51)	RS1/16SS222J
R 7485 (B,95,30) (A)	RS1/16SS473J	R 7717 (B,14,15)	RS1/16SS102J
R 7503 (B,126,28)	RS1/16SS103J	R 7718 (B,13,15)	RS1/16SS102J
R 7504 (B,125,28)	RS1/16SS103J	R 7719 (A,43,50)	RS1/16SS105J
R 7505 (B,122,28)	RS1/16SS103J	R 7720 (A,21,21)	RS1/16SS0R0J
R 7506 (B,121,28)	RS1/16SS103J	R 7721 (A,21,19)	RS1/16SS0R0J
R 7507 (B,120,28)	RS1/16SS103J	R 7722 (A,19,23)	RS1/16SS681J
R 7508 (A,120,28)	RS1/16SS0R0J	R 7723 (B,16,24)	RS1/16SS0R0J
R 7509 (A,121,28)	RS1/16SS0R0J	R 7725 (A,19,26)	RS1/16SS681J
R 7510 (A,122,27)	RS1/16SS0R0J	R 7726 (A,20,20)	RS1/16SS681J
R 7511 (A,124,27)	RS1/16SS0R0J	R 7727 (A,19,16)	RS1/16SS331J
R 7512 (A,125,28)	RS1/16SS0R0J	R 7728 (A,46,50)	RS1/16SS0R0J
R 7513 (A,126,28)	RS1/16SS0R0J	R 7729 (B,13,24)	RS1/16SS0R0J
R 7514 (A,127,26)	RS1/16SS0R0J	R 7730 (A,46,51)	RS1/16SS0R0J
R 7525 (B,164,47)	RS1/16SS680J	R 7731 (B,37,41)	RS1/16SS0R0J
R 7526 (B,159,47)	RS1/16SS680J	R 7733 (A,35,48)	RS1/16SS0R0J
R 7527 (A,147,49)	RS1/16SS680J	R 7734 (A,27,36)	RS1/16SS223J
R 7529 (B,88,14)	RS1/16SS0R0J	R 7735 (A,27,37)	RS1/16SS223J
R 7534 (B,162,47)	RS1/16SS680J	R 7737 (B,26,36)	RS1/16SS222J
R 7535 (A,145,49)	RS1/16SS680J	R 7738 (B,24,36)	RS1/16SS332J
R 7537 (B,163,48)	RS1/16SS103J	R 7740 (A,34,40)	RS1/16SS0R0J
R 7538 (B,161,48)	RS1/16SS103J	R 7744 (A,27,33)	RS1/16SS223J
R 7539 (B,158,48)	RS1/16SS103J	R 7745 (B,38,37)	RS1/16SS333J
R 7540 (A,146,51)	RS1/16SS103J	R 7746 (B,38,38)	RS1/16SS473J
R 7541 (A,145,51)	RS1/16SS103J	R 7747 (A,15,27)	RS1/16SS821J
R 7544 (A,142,51)	RS1/16SS0R0J	R 7748 (A,15,31)	RS1/16SS821J
R 7545 (A,89,42)	RS1/16SS0R0J	R 7749 (B,50,41)	RS1/16SS101J
R 7601 (B,154,28)	RS1/16SS221J	R 7756 (B,140,71)	RS1/16SS103J
R 7603 (B,158,27)	RS1/16SS0R0J	R 7757 (B,138,65)	RS1/16SS220J
R 7604 (B,153,29)	RS1/16SS102J	R 7758 (B,142,62)	RS1/16SS220J
R 7605 (B,155,29)	RS1/16SS102J	R 7761 (A,55,37)	RS1/16SS0R0J
R 7606 (B,151,29)	RS1/16SS102J	R 7762 (B,31,23)	RS1/16SS222J
R 7609 (B,137,30)	RS1/16SS0R0J	R 7766 (A,43,32)	RS1/16SS103J
R 7610 (B,142,31)	RS1/16SS330J	R 7767 (A,44,32)	RS1/16SS0R0J
R 7611 (B,139,33)	RS1/16SS330J	R 7768 (A,52,33)	RS1/16SS0R0J
R 7612 (B,146,29)	RS1/16SS330J	R 7769 (A,51,33)	RS1/16SS0R0J
R 7613 (B,141,50)	RS1/16SS221J	R 7770 (A,50,33)	RS1/16SS0R0J
R 7614 (B,136,49)	RS1/16SS0R0J	R 7771 (A,49,33)	RS1/16SS331J
R 7615 (B,133,55)	RS1/16SS330J	R 7772 (A,52,30)	RS1/16SS103J
R 7616 (B,133,53)	RS1/16SS330J	R 7773 (A,51,31)	RS1/16SS103J
R 7617 (B,134,51)	RS1/16SS330J	R 7774 (A,50,31)	RS1/16SS103J
R 7621 (B,161,24)	RS1/16SS821J	R 7775 (B,55,42)	RS1/10SR0R0J
R 7622 (B,164,24)	RS1/16SS821J	R 7776 (A,34,43)	RS1/16SS0R0J
R 7623 (B,144,20)	RS1/16SS821J	R 7778 (B,51,35)	RS1/16SS153J
R 7624 (B,148,20)	RS1/16SS821J	R 7780 (B,48,32)	RS1/16SS223J
R 7625 (B,150,52)	RS1/16SS821J	R 7781 (B,43,30)	RS1/16SS223J
R 7626 (B,150,57)	RS1/16SS821J	R 7782 (B,48,31)	RS1/16SS0R0J
R 7628 (B,162,23)	RS1/16SS0R0J	R 7783 (B,36,32)	RS1/16SS163J
R 7631 (B,145,19)	RS1/16SS0R0J	R 7784 (B,38,32)	RS1/16SS163J
R 7634 (B,151,55)	RS1/16SS0R0J	R 7785 (B,35,32)	RS1/16SS101J
R 7639 (B,137,32)	RS1/16SS0R0J	R 7786 (B,46,30)	RS1/16SS0R0J
R 7640 (B,158,22)	RS1/16SS0R0J	R 7787 (A,9,112)	RS1/16SS153J
R 7702 (B,49,38)	RS1/16SS753J	R 7788 (A,6,111)	RS1/16SS683J
R 7703 (B,49,40)	RS1/16SS753J	R 7789 (A,5,104)	RS1/16SS562J

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

R 7790 (B,48,35)
R 7791 (A,5,101)
R 7792 (A,8,101)
R 7793 (B,31,41)

A

R 7794 (A,12,106)
R 7795 (A,9,114)
R 7797 (B,46,35)
R 7798 (A,28,30)
R 7804 (A,27,32)

R 7805 (A,13,110)
R 7806 (A,12,114)
R 7813 (B,53,36)
R 7820 (A,15,29)
R 7821 (A,25,43)

B

R 7822 (B,27,42)
R 7823 (B,36,36)
R 7826 (B,41,42)
R 7827 (A,49,49)
R 7828 (A,49,52)

R 7829 (A,14,26)
R 7832 (A,49,23)
R 7833 (A,46,30)
R 7834 (B,48,34)

C

R 7904 (B,77,68)
R 7905 (B,77,62)
R 7906 (B,76,59)
R 7907 (B,64,55)
R 7908 (B,66,55)

R 7909 (B,67,55)
R 7910 (A,67,57)
R 7911 (B,82,64)
R 7912 (B,82,62)

R 7913 (B,82,60)
R 7916 (B,80,74)
R 7919 (B,80,68)
R 7920 (B,83,70)

D

R 7921 (B,83,56)
R 7923 (B,83,68)
R 7924 (B,84,68)
R 7925 (A,85,72)

R 7926 (A,85,70)
R 7930 (A,93,69)
R 7931 (A,89,53)
R 7942 (B,59,52)

E

R 7943 (B,59,51)
R 7945 (A,91,68)
R 7951 (A,91,70)
R 7955 (A,99,63)

R 7956 (A,100,60)
R 7957 (A,100,58)
R 7958 (A,102,60)
R 7959 (A,102,58)
R 7967 (A,94,52)

F

R 7968 (A,99,62)
R 7977 (A,101,66)
R 7981 (A,96,52)
R 7982 (B,63,47)
R 7983 (B,67,47)

R 7984 (A,67,48)

RS1/10SR623J
RS1/16SS104J
RS1/16SS274J
RS1/16SS0R0J

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS153J
RS1/16SS223J
RS1/16SS0R0J

RS1/16SS102J
RS1/16SS102J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

RS1/16SS0R0J
RS1/16SS273J
RS1/16SS0R0J
RS1/16SS472J
RS1/16SS472J

RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS682J

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J

RS1/16SS151J
RS1/16SS151J
RS1/4SA0R0J
RS1/4SA0R0J

RS1/4SA0R0J
RS1/16SS1500D
RS1/16SS1500D
RS1/16SS472J

RS1/16SS473J
RS1/16SS101J
RS1/16SS101J
RS1/16SS821J

RS1/16SS105J
RS1/16SS221J
RS1/16SS221J
RS1/16SS273J

RS1/16SS273J
RS1/16SS103J
RS1/16SS101J
RS1/16SS104J

RAB4CQ151J
RAB4CQ151J
RAB4CQ0R0J
RAB4CQ0R0J
RS1/16SS331J

RS1/16SS221J
RS1/16SS181J
RS1/16SS0R0J
RS1/16SS101J
RS1/16SS101J

RS1/16SS101J

R 7985 (A,63,48)
R 7986 (B,64,35)
R 7987 (B,67,35)
R 7988 (A,66,36)

R 7989 (A,62,36)
R 7991 (B,58,26)
R 7992 (B,58,47)
R 8001 (B,117,104) (A)

R 8002 (B,119,104) (A)
R 8003 (B,120,102) (A)
R 8004 (B,118,101) (A)
R 8006 (A,118,94) (A)
R 8007 (A,118,93) (A)

R 8008 (B,116,104) (A)
R 8009 (B,115,99) (A)
R 8010 (B,115,100) (A)
R 8011 (A,109,82) (A)
R 8012 (A,109,80) (A)

R 8013 (A,122,58) (A)
R 8014 (A,117,57) (A)
R 8015 (B,121,71) (A)
R 8016 (A,122,54) (A)
R 8017 (A,114,80) (A)

R 8018 (B,107,71) (A)
R 8019 (B,121,70) (A)
R 8021 (B,121,69) (A)
R 8022 (B,107,69) (A)
R 8024 (A,119,68) (A)

R 8025 (A,120,68) (A)
R 8026 (B,123,68) (A)
R 8027 (A,118,63) (A)
R 8028 (A,119,65) (A)
R 8029 (B,123,66) (A)

R 8031 (A,109,61) (A)
R 8032 (A,108,63) (A)
R 8033 (B,123,65) (A)
R 8035 (B,121,64) (A)

R 8036 (A,106,63) (A)
R 8037 (B,123,63) (A)
R 8038 (A,125,53) (A)
R 8040 (A,124,53) (A)
R 8041 (A,126,53) (A)

R 8042 (B,107,63) (A)
R 8043 (B,107,60) (A)
R 8044 (B,112,58) (A)
R 8045 (B,115,58) (A)
R 8046 (A,122,76) (A)

R 8048 (B,105,63) (A)
R 8049 (B,105,60) (A)
R 8050 (B,112,56) (A)
R 8051 (B,115,56) (A)
R 8052 (B,105,66) (A)

R 8057 (A,129,75) (A)
R 8058 (A,129,74) (A)
R 8059 (A,129,72) (A)
R 8061 (B,122,59) (A)
R 8062 (B,122,57) (A)
R 8065 (B,124,73) (A)

R 8066 (B,128,69) (A)
R 8070 (A,118,72) (A)

RS1/16SS101J
RS1/16SS75R0D
RS1/16SS75R0D
RS1/16SS75R0D

RS1/16SS75R0D
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J
RS1/16SS103J
RS1/16SS102J

RS1/16SS102J
RS1/16SS473J
RS1/16SS473J
RS1/16SS223J
RS1/16SS433J

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS273J

RS1/16SS102J
RS1/16SS271J
RS1/16SS0R0J
RS1/16SS105J
RS1/16SS333J

RS1/16SS333J
RS1/16SS330J
RS1/16SS333J
RS1/16SS333J
RS1/16SS330J

RS1/16SS103J
RS1/16SS0R0J
RS1/16SS330J
RS1/16SS0R0J

RS1/16SS472J
RS1/16SS101J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

RAB4CQ220J
RAB4CQ220J
RAB4CQ220J
RAB4CQ220J
RS1/16SS472J

RAB4CQ0R0J
RAB4CQ0R0J
RAB4CQ0R0J
RAB4CQ0R0J
RS1/16SS100J

RS1/16SS821J
RS1/16SS0R0J
RS1/16SS821J
RAB4CQ221J
RAB4CQ0R0J
RS1/16SS0R0J

RS1/16SS0R0J
RS1/16SS222J

1

2

3

4

5	6	7	8
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
R 8071 (A,113,80) (A)	RS1/16SS0R0J	R 8305 (B,156,18)	RS1/16SS471J
R 8114 (A,144,87)	RS1/16SS10R0D	R 8306 (B,156,16)	RS1/16SS0R0J
R 8115 (A,141,81)	RS1/16SS1501D	R 8307 (B,165,19)	RS1/16SS0R0J
		R 8308 (B,164,19)	RS1/16SS0R0J
R 8116 (A,141,79)	RS1/16SS2402D	R 8309 (B,162,18)	RS1/16SS0R0J
R 8117 (A,141,77)	RS1/16SS3302D		
R 8119 (B,144,82)	RS1/16SS4702D	R 8310 (B,161,18)	RS1/16SS0R0J
R 8120 (A,142,77)	RS1/16SS4702D	R 8311 (B,160,19)	RS1/16SS0R0J
R 8121 (A,142,81)	RS1/16SS432J	R 8312 (B,159,19)	RS1/16SS0R0J
		R 8313 (B,159,18)	RS1/16SS0R0J
R 8127 (B,153,80)	RS1/16SS471J	R 8314 (B,158,18)	RS1/16SS0R0J
R 8128 (B,153,81)	RS1/16SS0R0J		
R 8129 (B,156,83)	RS1/16SS0R0J	R 8315 (B,155,19)	RS1/16SS102J
R 8130 (B,156,84)	RS1/16SS0R0J	R 8316 (B,154,18)	RS1/16SS102J
R 8132 (A,157,77)	RS1/16SS0R0J	R 8317 (B,154,16)	RS1/16SS102J
		R 8322 (B,152,18)	RS1/16SS0R0J
R 8133 (A,156,77)	RS1/16SS0R0J	R 8326 (B,150,15) (A)	RS1/16SS0R0J
R 8134 (A,155,77)	RS1/16SS1002D		
R 8135 (A,153,78)	RS1/16SS2202D	R 8333 (B,147,17)	RS1/16SS0R0J
R 8136 (A,152,77)	RS1/16SS3302D	R 8334 (B,146,17)	RS1/16SS0R0J
R 8137 (A,156,81)	RS1/16SS102J	R 8336 (B,145,16)	RS1/16SS0R0J
		R 8337 (B,144,17)	RS1/16SS0R0J
R 8138 (B,146,87)	RS1/16SS103J	R 8340 (B,142,17)	RS1/16SS0R0J
R 8139 (A,152,79)	RS1/16SS103J		
R 8140 (A,151,81)	RS1/10SR0R0J	R 8341 (B,139,17)	RS1/16SS0R0J
R 8141 (A,156,80)	RS1/16SS102J	R 8360 (B,131,14)	RS1/16SS0R0J
R 8142 (A,160,84)	RS1/16SS0R0J	R 8401 (B,129,16)	RS1/16SS0R0J
		R 8402 (B,131,17)	RS1/16SS0R0J
R 8143 (A,167,80)	RS1/16SS4702D	R 8403 (B,130,15)	RS1/16SS0R0J
R 8144 (A,167,79)	RS1/16SS4702D		
R 8145 (A,167,78)	RS1/16SS4702D	R 8404 (B,123,21)	RS1/16SS0R0J
R 8146 (B,149,76)	RS1/10SR0R0J	R 8408 (B,123,23)	RS1/16SS0R0J
R 8148 (A,156,82)	RS1/16SS102J	R 8414 (B,119,26)	RS1/16SS0R0J
		R 8415 (B,118,24)	RS1/16SS0R0J
R 8149 (A,156,79)	RS1/16SS102J	R 8416 (B,118,29)	RS1/16SS0R0J
R 8150 (B,152,86)	RS1/16SS0R0J		
R 8201 (B,76,23)	RS1/16SS0R0J	R 8417 (B,117,21)	RS1/16SS0R0J
R 8202 (B,141,16)	RS1/16SS0R0J	R 8419 (B,116,26)	RS1/16SS0R0J
R 8203 (B,75,24)	RS1/16SS0R0J	R 8420 (B,115,21)	RS1/16SS0R0J
		R 8421 (B,115,23)	RS1/16SS0R0J
R 8205 (B,74,23)	RS1/16SS0R0J	R 8422 (B,115,25)	RS1/16SS0R0J
R 8209 (B,89,126)	RS1/10SR0R0J		
R 8210 (B,78,124)	RS1/10SR0R0J	R 8423 (B,114,26)	RS1/16SS0R0J
R 8216 (B,73,17)	RS1/16SS0R0J	R 8446 (B,101,23)	RS1/16SS0R0J
R 8218 (B,72,20)	RS1/16SS0R0J	R 8447 (B,100,24)	RS1/16SS0R0J
		R 8449 (B,99,25)	RS1/16SS0R0J
R 8227 (B,67,17)	RS1/16SS0R0J	R 8451 (B,98,24)	RS1/16SS0R0J
R 8228 (B,66,19)	RS1/16SS0R0J		
R 8229 (B,66,17)	RS1/16SS0R0J	R 8452 (B,97,24)	RS1/16SS0R0J
R 8231 (B,65,19)	RS1/16SS0R0J	R 8453 (B,94,25)	RS1/16SS0R0J
R 8232 (B,65,17)	RS1/16SS0R0J	R 8454 (B,95,22)	RS1/16SS0R0J
		R 8456 (B,121,23)	RS1/8SQ0R0J
R 8233 (B,64,19)	RS1/16SS0R0J	R 8458 (B,102,22)	RS1/8SQ0R0J
R 8235 (B,63,17)	RS1/16SS0R0J		
R 8236 (B,63,19)	RS1/16SS0R0J	R 8460 (B,94,21)	RS1/8SQ0R0J
R 8237 (B,62,17)	RS1/16SS0R0J	R 8461 (B,89,30)	RS1/16SS0R0J
R 8239 (B,61,20)	RS1/16SS0R0J	R 8501 (A,140,95)	RS1/16SS473J
		R 8503 (A,139,95)	RS1/16SS472J
R 8240 (B,60,19)	RS1/16SS0R0J	R 8509 (A,16,88)	RS1/16SS101J
R 8241 (B,60,20)	RS1/16SS0R0J	R 8510 (A,7,87)	RS1/16SS103J
R 8242 (B,59,18)	RS1/16SS0R0J	R 8511 (A,18,91)	RS1/16SS0R0J
R 8243 (B,58,21) (A)	RS1/16SS0R0J		
R 8244 (B,57,19) (A)	RS1/16SS0R0J	R 8512 (B,144,91)	RS1/16SS0R0J
		R 8514 (A,5,91)	RS1/16SS0R0J
R 8245 (B,57,21) (A)	RS1/16SS0R0J	R 8517 (A,11,90)	RS1/16SS104J
R 8249 (B,54,23)	RS1/16SS0R0J	R 8520 (A,22,119)	RS1/16SS473J
R 8250 (B,53,21)	RS1/16SS0R0J	R 8525 (A,28,128)	RS1/16SS104J
R 8251 (B,52,23)	RS1/16SS0R0J		
R 8254 (B,51,20)	RS1/16SS0R0J	R 8526 (A,46,115)	RS1/16SS471J
R 8255 (B,50,20)	RS1/16SS0R0J	R 8528 (A,23,123)	RS1/16SS473J
R 8304 (B,157,16)	RS1/16SS471J	R 8529 (A,44,114)	RS1/16SS223J
		R 8530 (A,47,115)	RS1/16SS223J

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

R 8533 (A,23,129)

RS1/16SS331J

C 7086 (A,68,86) 10 uF

CCG1192

R 8534 (A,44,115)

RS1/16SS181J

C 7101 (B,58,77)

CCSSCH150J50

R 8535 (A,48,116)

RS1/16SS181J

C 7102 (B,60,76)

CCSSCH220J50

R 8541 (A,29,125)

RS1/10SR102J

C 7103 (B,61,78)

CKSSYB152K50

R 8542 (A,28,121)

RS1/10SR102J

C 7104 (B,58,66)

CCSSCH150J50

R 8547 (A,54,120)

RS1/10SR0R0J

C 7105 (B,60,67)

CCSSCH220J50

R 8548 (B,49,119)

RS1/16SS0R0J

C 7106 (B,57,74)

CCSSCH102J50

R 8549 (B,35,119)

RS1/16SS0R0J

C 7107 (B,61,66)

CKSSYB472K50

R 8550 (B,48,119)

RS1/16SS0R0J

C 7108 (B,57,69)

CCSSCH102J50

R 8551 (B,43,119)

RS1/16SS0R0J

C 7109 (B,59,57)

CKSSYB103K16

R 8552 (B,41,119)

RS1/16SS0R0J

C 7110 (B,52,77)

CKSSYB222K50

R 8553 (B,37,119)

RS1/16SS0R0J

C 7111 (B,55,66)

CKSSYB153K16

R 8565 (A,7,117)

RS1/16SS0R0J

C 7112 (B,48,72)

CKSRYB104K50

R 8566 (A,11,117)

RS1/16SS0R0J

C 7113 (B,46,78)

CKSRYB104K50

R 8581 (A,141,91)

RS1/16SS103J

C 7114 (B,47,63)

CKSRYB104K50

R 8582 (A,143,95)

RS1/16SS103J

C 7115 (B,46,71) 4.7 uF

CCG1201

R 8585 (B,55,124)

RS1/16SS102J

C 7116 (A,40,76) 10 uF

CCG1236

R 8586 (B,58,124)

RS1/16SS102J

C 7117 (A,41,67) 10 uF

CCG1236

R 8603 (A,11,6)

RS1/16SS0R0J

C 7121 (A,57,76) 47 uF

CCG1229

R 8604 (A,33,14)

RS1/16SS0R0J

C 7122 (A,57,70) 47 uF

CCG1229

R 8705 (A,128,88) (A)

RS1/16SS0R0J

C 7124 (A,57,73) 47 uF

CCG1229

R 8706 (A,128,86) (B)

RS1/16SS0R0J

C 7125 (A,57,67) 47 uF

CCG1229

R 8707 (A,128,84) (C)

RS1/16SS0R0J

C 7201 (A,143,67)

CKSSYB104K10

R 8709 (A,136,96)

RS1/16SS0R0J

C 7202 (A,146,67)

CKSSYB104K10

C 7204 (A,147,71)

CKSSYB104K10

C 7207 (B,89,88) 10 uF

CCG1236

C 7208 (B,89,90) 10 uF

CCG1236

C 7209 (B,95,110) 10 uF

CCG1236

CAPACITORS

C 7003 (A,33,104)

CKSRYB104K50

C 7210 (B,95,108) 10 uF

CCG1236

C 7006 (A,65,112)

CKSQYB334K50

C 7211 (A,92,102)

CCSSCH471J50

C 7013 (B,71,118) Capacitor

CEVW220M16

C 7212 (A,86,81)

CCSSCH471J50

C 7014 (B,52,119)

CKSRYB104K50

C 7213 (B,103,100)

CEVW101M16

C 7017 (B,145,75) 4.7 uF

CCG1212

C 7214 (B,95,79)

CEVW101M16

C 7018 (A,9,36)

CKSRYB105K10

C 7215 (A,92,104)

CCSSCH270J50

C 7021 (A,122,48) 4.7 uF(A)

CCG1212

C 7216 (A,87,84)

CCSSCH270J50

C 7022 (B,143,79)

CKSRYB105K10

C 7217 (B,106,104)

CKSSYB104K10

C 7023 (A,8,34) 4.7 uF

CCG1212

C 7218 (B,100,83)

CKSSYB104K10

C 7029 (A,118,52) 4.7 uF(A)

CCG1212

C 7219 (A,91,105)

CKSSYB222K50

C 7032 (A,86,45)

CKSRYB105K10

C 7220 (A,85,84)

CCSSCH821J50

C 7033 (A,81,45)

CKSRYB105K10

C 7221 (A,96,113)

CKSRYB104K50

C 7036 (A,112,45)

CKSRYB105K10

C 7222 (A,90,92)

CKSRYB104K50

C 7039 (A,112,46)

CKSSYB473K16

C 7223 (A,91,107)

CKSRYB105K10

C 7042 (A,17,36)

CKSSYB104K10

C 7224 (A,85,86)

CKSRYB105K10

C 7043 (A,120,45) (A)

CKSSYB104K10

C 7225 (B,104,105) 22 uF

CCG1254

C 7045 (B,28,70)

CCSSCH561J50

C 7226 (B,98,85) 22 uF

CCG1254

C 7046 (A,32,72) 10 uF/16 V

DCH1263

C 7229 (A,104,110)

CKSSYB104K16

C 7047 (A,32,73) 10 uF/16 V

DCH1263

C 7230 (A,104,107)

CKSSYB104K16

C 7048 (A,32,75) 10 uF/16 V

DCH1263

C 7231 (A,104,102)

CKSSYB102K50

C 7049 (A,32,77)

CKSSYB104K16

C 7232 (A,102,102)

CKSSYB472K50

C 7052 (B,29,86)

CKSSYB104K16

C 7233 (A,98,90)

CKSSYB104K16

C 7053 (A,23,79) 10 uF

CCG1236

C 7234 (A,98,87)

CKSSYB104K16

C 7055 (B,26,73)

CKSSYB103K16

C 7235 (A,98,82)

CKSSYB102K50

C 7056 (B,27,72)

CCSSCH8R0D50

C 7236 (A,96,82)

CKSSYB472K50

C 7057 (B,32,73)

CKSSYB103K16

C 7301 (B,80,45) 22 uF

DCH1256

C 7058 (B,26,72)

CKSSYB152K50

C 7303 (A,125,39)

CKSSYB104K10

C 7059 (B,27,73)

CKSRYB105K16

C 7305 (B,86,48) 22 uF

DCH1256

C 7060 (A,23,77) 10 uF

CCG1236

C 7306 (A,128,41)

CKSSYB104K10

C 7061 (A,23,75) 10 uF

CCG1236

C 7501 (B,128,27)

CKSSYB104K10

C 7074 (A,71,89)

CKSRYB105K10

C 7503 (A,104,39) 10 uF

CCG1192

C 7085 (B,137,76)

CKSSYB104K10

C 7504 (A,156,50) 10 uF

CCG1192

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 7506	(A,156,49)	CKSSYB104K10		C 7749	(A,53,39)	CKSSYB104K10	
C 7508	(A,124,11)	CKSSYB104K10					
C 7601	(B,165,36) 10 uF	CCG1192		C 7751	(A,53,37)	CKSSYB104K10	
				C 7754	(A,42,34)	CKSSYB104K10	A
C 7602	(B,147,24) 10 uF	CCG1192		C 7755	(A,37,33) 10 uF	CCG1192	
C 7603	(B,142,60) 10 uF	CCG1192		C 7756	(A,41,32) 10 uF	CCG1192	
C 7604	(B,165,34)	CKSSYB104K10		C 7757	(A,37,35) 10 uF	CCG1192	
C 7605	(B,146,24)	CKSSYB104K10					
C 7606	(B,141,59)	CKSSYB104K10		C 7758	(A,37,37)	CKSSYB104K10	
				C 7759	(A,49,31)	CCSSCH220J50	
C 7607	(B,167,25)	CKSSYB104K10		C 7761	(B,36,39)	CKSRYB105K10	
C 7608	(B,138,21)	CKSSYB104K10		C 7762	(A,32,42)	CKSRYB105K10	
C 7609	(B,143,50)	CKSSYB104K10		C 7763	(B,54,35) 2.2 uF	CCG1218	
C 7610	(B,167,24) 10 uF	CCG1192					
C 7611	(B,139,19) 10 uF	CCG1192		C 7765	(B,44,29) 0.47 uF	CCG1339	
				C 7766	(B,37,34)	CCSSCH101J50	
C 7612	(B,145,51) 10 uF	CCG1192		C 7767	(B,37,32)	CCSSCH101J50	B
C 7613	(B,161,23)	CKSSYB102K50		C 7768	(B,46,31)	CKSSYB104K10	
C 7614	(B,164,23)	CKSSYB102K50					
C 7615	(B,144,19)	CKSSYB102K50		C 7769	(A,8,114)	CKSSYB683K10	
C 7616	(B,147,19)	CKSSYB102K50		C 7770	(A,7,112)	CKSRYB474K16	
				C 7771	(A,5,106) 4.7 uF	CCG1331	
C 7617	(B,150,54)	CKSSYB102K50		C 7772	(A,5,102)	CCSSCH180J50	
C 7618	(B,150,56)	CKSSYB102K50		C 7773	(A,7,101)	CCSSCH6R0D50	
C 7701	(B,48,40)	CCSSCH680J50					
C 7705	(B,26,27) 10 uF	CCG1192		C 7774	(A,11,105)	CKSSYB104K10	
C 7707	(A,43,52)	CCSSCH120J50		C 7775	(A,20,30)	CKSRYB105K10	
				C 7779	(A,26,32)	CKSSYB104K10	
C 7708	(B,23,27) 10 uF	CCG1192		C 7780	(A,12,109) 22 uF	DCH1256	
C 7710	(B,24,25)	CKSSYB104K10		C 7783	(B,41,41)	CKSSYB104K10	C
C 7711	(B,28,23)	CKSSYB104K10					
C 7713	(A,40,48)	CCSSCH120J50		C 7785	(B,136,64)	CCSSCH101J50	
C 7714	(A,20,29)	CKSRYB105K10		C 7786	(B,22,25)	CKSSYB104K10	
				C 7789	(B,50,34) 2.2 uF	CCG1218	
C 7715	(B,11,25)	CKSRYB105K10		C 7852	(B,65,108)	CKSSYB103K16	
C 7717	(A,34,47) 10 uF	CCG1192		C 7878	(B,67,110)	CKSSYB104K10	
C 7718	(A,37,46)	CKSSYB104K10					
C 7719	(A,18,16)	CCSSCH470J50		C 7879	(B,52,107)	CKSSYB104K10	
				C 7880	(B,47,107)	CKSSYB104K10	
C 7720	(A,19,20)	CCSSCH220J50		C 7909	(B,65,40)	CKSRYB105K10	
C 7721	(A,18,26)	CCSSCH220J50		C 7910	(B,63,40)	CKSRYB105K10	
C 7722	(A,19,24)	CCSSCH220J50		C 7911	(B,68,40)	CKSRYB105K10	
C 7723	(A,34,45) 10 uF	CCG1192					D
				C 7912	(B,67,40)	CKSRYB105K10	
C 7724	(B,24,38) 10 uF	CCG1192		C 7913	(A,65,41)	CKSRYB105K10	
C 7725	(A,10,26) 10 uF	CCG1192		C 7914	(A,67,41)	CKSRYB105K10	
C 7726	(A,12,24)	CKSSYB104K10		C 7915	(A,61,42)	CKSRYB105K10	
C 7727	(B,26,35)	CKSSYB104K10		C 7916	(A,63,41)	CKSRYB105K10	
C 7728	(B,27,40)	CKSRYB105K10					
				C 7917	(A,65,58) 10 uF	CCG1192	
C 7729	(A,9,15)	CKSSYB104K10		C 7921	(B,65,46)	CKSSYB104K10	
C 7730	(A,36,45)	CKSSYB104K10		C 7922	(B,68,46)	CKSSYB104K10	
C 7731	(A,11,13) 10 uF	CCG1192		C 7923	(A,66,47)	CKSSYB104K10	
C 7732	(B,38,36)	CCSSCH561J50		C 7924	(A,62,48)	CKSSYB104K10	
C 7733	(B,39,38)	CCSSCH680J50					
				C 7925	(B,72,61)	CKSRYB105K16	E
C 7734	(A,15,28)	CKSSYB102K50		C 7926	(A,74,65)	CCSSCH102J50	
C 7735	(A,15,30)	CKSSYB102K50		C 7927	(A,73,65)	CKSSYB104K10	
C 7736	(B,149,70)	CKSRYB225K10		C 7928	(B,73,59)	CKSRYB105K16	
C 7737	(B,150,67) 4.7 uF	CCG1201		C 7929	(A,73,63)	CKSSYB103K16	
C 7738	(B,148,66)	CKSSYB104K10					
				C 7930	(A,73,62)	CKSSYB474K6R3	
C 7739	(B,150,64) 10 uF	CCG1192		C 7931	(A,73,61)	CKSSYB474K6R3	
C 7740	(B,46,41)	CKSSYB104K10		C 7932	(B,74,57)	CKSRYB105K16	
C 7741	(B,147,62) 10 uF	CCG1192		C 7933	(A,73,59)	CKSSYB104K10	
C 7742	(B,154,67)	CKSSYB104K10		C 7934	(A,74,59)	CCSSCH102J50	
C 7743	(B,147,61)	CKSSYB104K10					
				C 7935	(A,68,59)	CKSRYB105K16	F
C 7744	(A,37,44)	CCSSCH151J50		C 7936	(A,72,67) 10 uF	CCG1192	
C 7745	(A,24,42)	CKSRYB105K10		C 7937	(A,74,62)	CKSSYB474K6R3	
C 7747	(A,33,39)	CKSRYB105K10		C 7939	(A,78,70)	CKSSYB104K10	
C 7748	(A,55,40) 10 uF	CCG1192		C 7940	(A,78,69)	CCSSCH102J50	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A C 7941 (A,78,54) CKSSYB104K10
 C 7942 (A,79,54) CKSSYB104K10
 C 7944 (B,81,71) CKSRYB105K16
 C 7945 (A,79,73) 10 uF CCG1192
 C 7946 (A,81,70) CKSSYB104K10

C 8205 (A,81,116) 10 uF CCG1236
 C 8208 (B,51,28) (A) CKSSYB104K10
 C 8501 (A,17,91) CKSSYB104K10
 C 8503 (B,142,92) CKSSYB104K10
 C 8505 (A,6,91) CKSSYB104K10

C 7947 (A,82,54) CKSSYB104K10
 C 7948 (A,82,71) CKSSYB104K10
 C 7949 (A,84,49) 10 uF CCG1192
 C 7950 (A,83,70) CKSSYB104K10
 C 7951 (A,84,54) CKSSYB104K10

C 8506 (A,24,120) CKSSYB104K10
 C 8507 (A,26,125) CKSSYB104K10
 C 8508 (A,23,127) CKSSYB104K10
 C 8517 (A,54,122) CKSRYB104K50

B C 7952 (A,85,54) CKSSYB104K10
 C 7953 (A,78,44) 10 uF CCG1192
 C 7954 (A,87,72) CCSSCH5R0C50
 C 7955 (A,86,72) CCSSCH6R0D50
 C 7956 (A,90,65) CKSSYB104K10

**Unit Number : CWX4496****Unit Name : DVD Core Unit**

C 7957 (A,90,64) CKSSYB104K10
 C 7958 (A,90,68) CKSSYB103K16
 C 7963 (A,95,64) 1 uF DCH1246
 C 7964 (A,93,55) 1 uF DCH1246
 C 7965 (A,95,63) CKSSYB103K16

MISCELLANEOUS

IC 1002 (B,15,13) Regulator IC S-1133B50-U5
 IC 1003 (B,37,11) IC S-1200B50-M5
 IC 1004 (B,64,28) IC NJM2855DL1-33
 IC 1251 (A,12,42) IC BA5839FP
 IC 1401 (B,27,41) Flash ROM Unit CWW7439

C 7966 (A,93,54) CKSSYB103K16
 C 7970 (B,65,51) CKSSYB104K10
 C 7971 (B,68,51) CKSSYB104K10
 C 7972 (A,65,52) CKSSYB104K10
 C 7973 (A,61,53) CKSSYB104K10

IC 1402 (B,45,28) Flash ROM Unit CWW7440
 IC 1480 (A,64,30) RAM IC M12L64164A-5TG2Y
 IC 1501 (A,39,33) IC MN2DS0018MA
 IC 1801 (B,34,16) D/A Converter PCM1753DBQ
 IC 1953 (B,57,17) IC S-1135D12-A6

C 7974 (A,96,70) 1 uF DCH1246
 C 7975 (A,96,69) CKSSYB103K16
 C 7979 (B,62,56) CKSSYB104K10
 C 7980 (B,57,49) 10 uF CCG1192
 C 8004 (B,110,72) 10 uF(A) CCG1192

Q 1101 (B,12,59) Transistor LSCR523UB
 Q 1102 (B,13,56) Transistor LSCR523UB
 Q 1103 (B,9,63) Transistor 2SB1132
 Q 1104 (B,22,54) Transistor 2SB1132
 L 1501 (A,54,31) Inductor CTF1743

C 8007 (B,117,102) (A) CCSSCH270J50
 C 8008 (B,111,71) (A) CKSSYB104K10
 C 8009 (B,117,98) (A) CCSSCH270J50
 C 8012 (A,113,67) (A) CKSSYB104K10
 C 8013 (A,115,67) (A) CKSSYB104K10

L 1511 (A,48,17) Chip Beads VTL1126
 L 1902 (A,17,17) Inductor CTF1487
 L 1903 (B,63,16) Inductor CTF1558
 L 1904 (A,68,18) Ferrite Bead CTF1528
 X 1501 (B,48,18) Crystal Resonator 27.000 MHz CSS1823

C 8014 (A,117,66) (A) CKSSYB104K10
 C 8016 (B,106,71) (A) CCSSCH120J50
 C 8017 (B,105,71) (A) CCSSCH150J50
 C 8019 (A,112,66) (A) CKSSYB104K10
 C 8023 (B,126,63) (A) CCSSCH470J50

F 1001 (A,14,19) Chip EMI Filter DTF1106
 F 1002 (B,63,18) Chip EMI Filter DTL1106
 S 1 (A,47,55) Spring Switch(HOME) CSN1080
 S 3 (B,25,13) Spring Switch(12EJ) CSN1081
 VR1101 (A,7,63) Semi-fixed 6.8 kohm(B) CCP1447

C 8024 (A,112,63) (A) CKSSYB104K10
 C 8025 (A,115,62) (A) CKSSYB104K10
 C 8026 (A,117,64) (A) CKSSYB104K10
 C 8028 (A,131,69) 10 uF(A) CCG1192
 C 8029 (A,130,69) CKSSYB104K10

VR1102 (A,7,60) Semi-fixed 15 kohm(B) CCP1449
 CN1101 (A,21,63) Connector CKS6331
 CN1952 (A,42,11) Connector CKS6025

E C 8031 (A,125,72) CKSSYB104K10
 C 8032 (A,125,73) 10 uF(A) CCG1192
 C 8033 (A,131,75) CKSSYB102K50
 C 8034 (A,131,73) CKSSYB102K50
 C 8101 (A,157,86) CKSSYB102K50

RESISTORS

R 1004 (B,12,20) RS1/16SS4702D
 R 1007 (B,12,21) RS1/16SS6801D
 R 1019 (B,33,7) RS1/16SS101J
 R 1025 (B,36,6) RS1/16SS101J
 R 1027 (A,40,18) RS1/16SS101J

C 8102 (A,156,86) CKSSYB103K16
 C 8103 (A,145,87) CKSSYB104K10
 C 8104 (A,155,86) CKSSYB104K10
 C 8105 (A,152,86) CKSSYB103K16
 C 8108 (A,142,79) CCSSCH101J50

R 1101 (B,15,57) RS1/16SS104J
 R 1102 (B,10,56) RS1/16SS104J
 R 1103 (B,14,61) RS1/16SS4300F
 R 1104 (B,11,59) RS1/16SS5100F
 R 1105 (B,17,54) RS1/16SS4300F

F C 8109 (A,148,81) CKSSYB104K10
 C 8110 (A,148,80) CKSSYB104K10
 C 8111 (B,158,76) CKSRYB104K16
 C 8112 (B,158,78) CKSRYB104K16
 C 8113 (A,160,87) CKSRYB104K16

R 1106 (B,10,57) RS1/16SS5600F
 R 1109 (B,6,57) RS1/16SS3R3J

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 1110 (B,16,54)	RS1/16SS3R3J	R 1532 (A,24,42)	RS1/16SS101J	A
R 1111 (B,6,63)	RS1/10SR3R3J	R 1533 (A,29,47)	RS1/16SS104J	
R 1112 (B,5,58)	RS1/10SR3R3J	R 1534 (B,29,48)	RS1/16SS221J	
R 1113 (B,15,59)	RS1/10SR3R9J	R 1535 (A,22,44)	RS1/16SS104J	A
R 1114 (B,19,57)	RS1/10SR3R3J	R 1536 (B,32,48)	RS1/16SS104J	
R 1115 (B,6,61)	RS1/10SR2R7J	R 1537 (A,24,46)	RS1/16SS104J	
R 1116 (B,6,62)	RS1/10SR2R7J	R 1538 (A,55,35)	RS1/16SS104J	
R 1117 (B,17,59)	RS1/10SR3R9J	R 1539 (B,33,48)	RS1/16SS104J	
R 1118 (B,16,59)	RS1/10SR3R9J	R 1540 (A,26,46)	RS1/16SS221J	■
R 1223 (A,42,50)	RS1/16SS561J	R 1541 (A,26,45)	RS1/16SS221J	
R 1225 (B,29,8)	RS1/16SS471J	R 1542 (B,26,34)	RS1/16SS103J	
R 1251 (A,5,48)	RS1/16SS333J	R 1546 (A,33,49)	RS1/16SS682J	
R 1252 (A,5,47)	RS1/16SS473J	R 1601 (A,32,17)	RS1/16SS123J	
R 1253 (A,5,46)	RS1/16SS333J	R 1602 (A,32,18)	RS1/16SS123J	B
R 1254 (A,5,45)	RS1/16SS473J	R 1603 (B,31,21)	RS1/16SS1002D	
R 1255 (A,21,48)	RS1/16SS183J	R 1604 (A,23,21)	RS1/16SS105J	
R 1256 (A,21,46)	RS1/16SS752J	R 1605 (A,22,23)	RS1/16SS105J	
R 1257 (B,8,37)	RS1/16SS221J	R 1670 (B,40,21)	RS1/16SS1002D	
R 1258 (A,19,39)	RS1/16SS221J	R 1671 (B,42,19)	RS1/16SS2402D	■
R 1401 (B,34,28)	RS1/16SS221J	R 1672 (A,39,18)	RS1/16SS2000D	
R 1402 (B,34,47)	RS1/16SS104J	R 1674 (A,36,17)	RS1/16SS3002D	
R 1405 (B,55,35)	RS1/16SS104J	R 1801 (B,41,8)	RS1/16SS104J	
R 1406 (B,39,45)	RS1/16SS472J	R 1802 (B,43,8)	RS1/16SS104J	
R 1480 (A,72,24)	RAB4CQ560J	R 1803 (B,37,13)	RS1/16SS821J	C
R 1481 (A,72,28)	RAB4CQ560J	R 1804 (B,39,14)	RS1/16SS821J	
R 1482 (A,72,32)	RAB4CQ560J	R 1982 (A,10,62)	RS1/16SS822J	
R 1483 (A,72,35)	RAB4CQ560J	R 1983 (B,40,20)	RS1/16SS1000D	
R 1484 (A,72,39)	RAB4CQ560J	R 1987 (B,43,21)	RS1/16SS0R0J	
R 1485 (A,55,22)	RAB4CQ560J	CAPACITORS		■
R 1486 (A,55,28)	RAB4CQ560J			
R 1487 (A,56,37)	RAB4CQ560J			
R 1488 (A,55,40)	RAB4CQ560J			
R 1489 (A,54,30)	RS1/16SS560J			
R 1490 (A,72,21)	RS1/16SS560J	C 1001 (B,34,10)	CKSRYB105K10	D
R 1501 (B,48,21)	RS1/16SS122J	C 1002 (B,12,17)	CKSSYB104K16	
R 1503 (B,46,21)	RS1/16SS105J	C 1003 (B,15,19)	CKSSYB104K16	
R 1504 (A,50,17)	RS1/16SS121J	C 1004 (B,15,17) 4.7 uF	CCG1201	
R 1505 (B,45,15)	RS1/16SS101J	C 1005 (B,40,11)	CKSRYB105K16	
R 1506 (B,45,14)	RS1/16SS101J	C 1010 (B,60,23)	CKSQYB225K10	■
R 1507 (B,43,17)	RS1/16SS101J	C 1011 (B,64,22)	CKSRYB105K10	
R 1508 (B,42,18)	RS1/16SS221J	C 1015 (A,25,7)	CKSSYB102K50	
R 1509 (A,20,34)	RS1/16SS102J	C 1016 (B,64,15)	CKSSYB102K50	
R 1510 (A,11,29)	RS1/16SS102J	C 1018 (B,14,21)	CKSSYB104K10	
R 1512 (A,55,32)	RS1/16SS470J	C 1040 (B,51,7)	CCSRCH821J50	E
R 1513 (A,23,38)	RS1/16SS103J	C 1041 (B,19,11)	CCSRCH271J50	
R 1514 (A,24,40)	RS1/16SS183J	C 1101 (B,14,53) 10 uF	CCG1192	
R 1516 (A,24,36)	RS1/16SS104J	C 1104 (B,7,57)	CKSSYB104K10	
R 1517 (B,57,22)	RS1/16SS103J	C 1105 (B,18,54)	CKSSYB104K10	
R 1518 (B,33,31)	RS1/16SS103J	C 1106 (B,7,66)	CKSSYB103K16	■
R 1519 (A,24,43)	RS1/16SS102J	C 1107 (B,25,53)	CKSSYB103K16	
R 1522 (A,21,37)	RS1/16SS104J	C 1108 (A,19,57)	CKSSYB103K16	
R 1523 (A,22,37)	RS1/16SS221J	C 1109 (A,7,57)	CKSRYB224K16	
R 1524 (B,29,33)	RS1/16SS472J	C 1110 (A,17,58)	CKSSYB103K16	
R 1525 (A,24,44)	RS1/16SS103J	C 1111 (A,9,66)	CKSRYB224K16	■
R 1526 (A,22,40)	RS1/16SS103J	C 1112 (B,17,52) 22 uF	DCH1256	
R 1527 (A,35,49)	RS1/16SS682J	C 1113 (B,8,58) 22 uF	DCH1256	
R 1528 (B,19,34)	RS1/16SS103J	C 1210 (B,76,34)	CKSSYB104K16	
R 1529 (B,35,21)	RS1/16SS103J	C 1251 (B,12,41)	CEVW101M16	
R 1530 (B,17,34)	RS1/16SS103J	C 1252 (B,7,41) 4.7 uF	CCG1222	F
R 1531 (B,33,30)	RS1/16SS103J	C 1253 (B,7,39)	CKSSYB104K16	
		C 1254 (A,6,38)	CKSSYB104K16	
		C 1255 (A,18,37)	CKSSYB104K16	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	C 1401 (B,34,27)	CKSSYB104K16	C 1622 (A,24,31)	CKSSYB333K16
	C 1403 (B,39,40)	CKSSYB104K10	C 1623 (A,27,20)	CKSRYB105K10
A	C 1404 (B,40,40) 4.7 uF	CCG1201	C 1624 (A,24,32)	CKSSYB104K10
	C 1408 (B,57,27)	CKSSYB104K10	C 1625 (A,24,29)	CKSSYB104K10
	C 1409 (B,58,29) 4.7 uF	CCG1201	C 1671 (A,41,18)	CKSSYB104K10
	C 1410 (B,33,29)	CKSSYB104K16	C 1673 (A,37,19)	CKSSYB104K10
	C 1480 (A,71,19)	CKSSYB104K10	C 1674 (B,42,20)	CKSSYB104K10
	C 1481 (A,72,22)	CKSSYB104K10	C 1676 (B,38,21)	CKSRYB105K10
	C 1482 (A,72,26)	CKSSYB104K10	C 1801 (B,42,10) 4.7 uF	CCG1201
	C 1484 (A,72,30)	CKSSYB104K10	C 1802 (B,46,10) 4.7 uF	CCG1201
	C 1485 (A,72,41)	CKSSYB104K10	C 1803 (B,42,12)	CCSRCH182J50
	C 1487 (A,57,29)	CKSSYB104K10	C 1804 (B,45,12)	CCSRCH182J50
	C 1488 (A,57,25)	CKSSYB104K10	C 1805 (B,34,13)	CKSSYB104K10
B	C 1489 (A,64,17) 10 uF	CCG1192	C 1806 (B,32,13) 10 uF	CCG1192
	C 1490 (A,66,18)	CKSSYB102K50	C 1809 (B,39,16)	CKSSYB104K10
	C 1501 (B,61,20) 10 uF	CCG1192	C 1953 (B,60,17)	CKSRYB105K10
	C 1502 (B,54,20) 10 uF	CCG1192	C 1954 (B,54,17)	CKSRYB105K10
	C 1503 (A,54,33)	CKSSYB104K10	C 1955 (B,77,40)	CKSSYB104K16
	C 1504 (A,53,24)	CKSSYB104K10		
	C 1505 (A,53,27)	CKSSYB104K10		
	C 1506 (B,52,35)	CKSSYB104K10		
	C 1507 (A,53,36)	CKSSYB104K10		
	C 1508 (A,53,39)	CKSSYB104K10		
	C 1509 (A,53,42)	CKSSYB104K10		
C	C 1510 (B,51,18)	CCSSCH100D50		
	C 1511 (A,48,18)	CKSSYB104K10		
	C 1512 (B,45,18)	CCSSCH100D50		
	C 1513 (A,48,48)	CKSSYB104K10	IC 4001 (A,44,44) IC	MCIMX6U6AVM08AB
	C 1514 (B,44,21)	CKSSYB104K10	IC 4301 (A,55,73) RAM IC	H5TQ4G63AFR-PBC
	C 1515 (A,45,18)	CKSSYB104K10	IC 4302 (A,36,73) RAM IC	H5TQ4G63AFR-PBC
	C 1516 (A,43,48)	CKSSYB104K10	IC 4401 (A,11,61) Flash Software Unit	CWW7906
			IC 4402 (B,22,66) IC	PE1029B
	C 1517 (A,42,48)	CKSSYB104K10	IC 4403 (B,25,57) IC	TC7WU04FU
	C 1518 (A,38,48)	CKSSYB104K10	IC 4501 (B,12,40) IC	AK8814VQ
	C 1519 (A,34,47)	CKSSYB104K10	IC 4701 (B,70,63) IC	LTC3612EUDC
	C 1520 (A,27,47)	CKSSYB104K10	IC 4721 (B,69,36) IC	LTC3612EUDC
D	C 1521 (A,24,34)	CKSSYB104K10	IC 4741 (B,69,51) IC	LTC3612EUDC
	C 1522 (A,25,38)	CKSSYB104K10	IC 4766 (A,31,18) Regulator IC	MM3479A30P
	C 1523 (A,20,46)	CKSSYB224K6R3	IC 4791 (A,48,24) IC	TC7SH08FUS1
	C 1524 (A,20,48)	CKSSYB473K16	IC 4792 (A,48,19) Reset IC	PST8429N
	C 1526 (A,24,37)	CKSSYB103K16	IC 4793 (A,46,16) IC	TC7SH08FUS1
	C 1528 (B,30,48)	CCSSCH471J50	IC 4794 (A,43,21) IC	TC7SH08FUS1
	C 1601 (A,32,19)	CKSSYB103K16	IC 4796 (A,24,60) Regulator IC	MM3479A12P
	C 1602 (A,34,17)	CCSSCH101J50	IC 4901 (A,69,27) IC	337S3959
	C 1603 (A,33,18)	CCSSCH101J50	IC 4903 (A,30,26) IC	TC7WBL125AFK
	C 1604 (A,30,17)	CCSSCH680J50	Q 4776 (A,64,24) Chip Transistor	2SB1689
E	C 1605 (A,30,18)	CCSSCH680J50	Q 4777 (A,63,30) Transistor	LTC044EEB
	C 1606 (A,35,19)	CKSSYB104K10	Q 4778 (A,28,24) Transistor	LTC044EEB
	C 1607 (A,20,24) 10 uF	CCG1192	L 4501 (B,7,50) Inductor	ATL7039
	C 1608 (A,28,18) 4.7 uF	CCG1201	L 4502 (B,9,31) Inductor	ATL7039
	C 1609 (A,26,22)	CKSSYB104K10	L 4701 (A,71,60) Inductor	CTH1500
	C 1612 (A,24,24)	CKSSYB104K10	L 4721 (A,65,35) Inductor	CTH1499
	C 1613 (A,24,25)	CKSSYB104K10	L 4741 (A,70,48) Inductor	CTH1499
	C 1614 (A,22,24)	CKSSYB104K10	L 4901 (B,58,43) Ferrite Bead	CTF1528
	C 1615 (A,23,26)	CKSSYB104K10	L 4909 (A,57,39) Inductor	CTF1787
	C 1616 (A,24,27)	CKSSYB104K10	L 5001 (A,72,23) Chip Ferrite Bead	BTX1046
	C 1617 (B,26,28)	CKSSYB104K10	L 5002 (A,68,20) Chip Ferrite Bead	VTL1183
F	C 1618 (A,22,29)	CCSSCH101J50	TH4381 (A,26,73) Thermistor	CCX1084
	C 1619 (A,23,30)	CKSSYB562K25	X 4001 (A,50,29) Resonator 24 MHz	CSS1773
	C 1620 (B,27,30)	CKSSYB224K6R3	X 4002 (A,45,29) Resonator 32.768 kHz	CSS1807
	C 1621 (A,22,31)	CKSSYB224K6R3	X 4401 (B,31,56) Crystal Resonator 14.745 6 MHz	CSS1835



Unit Number : CWN7890

Unit Name : SOC Dual Core Unit

MISCELLANEOUS

5				6				7				8			
<u>Circuit Symbol and No.</u>				<u>Part No.</u>				<u>Circuit Symbol and No.</u>				<u>Part No.</u>			
X 4901	(B,61,44)	VCXO 11.289 6 MHz		CWX4566				R 4213	(A,25,50)			RS1/16SS103J			
CN5001	(B,58,21)	Connector		CKS6499				R 4216	(A,24,47)			RS1/16SS103J			
CN5002	(B,21,21)	Connector		CKS6556				R 4220	(A,22,42)			RS1/16SS103J			A
								R 4222	(A,24,42)			RS1/16SS103J			
								R 4224	(A,22,40)			RS1/16SS103J			
								R 4226	(A,25,42)			RS1/16SS103J			
RESISTORS															
R 4001	(A,28,55)			RAB4CQ470J				R 4228	(A,23,42)			RS1/16SS103J			
R 4002	(A,28,52)			RAB4CQ470J				R 4230	(A,21,40)			RS1/16SS222J			
R 4003	(A,28,49)			RAB4CQ470J				R 4232	(A,21,40)			RS1/16SS222J			
R 4004	(A,28,47)			RAB4CQ470J				R 4236	(B,25,40)			RS1/16SS103J			
R 4005	(A,28,44)			RAB4CQ470J				R 4237	(B,23,45)			RS1/16SS103J			
								R 4238	(A,57,41)			RS1/16SS0R0J			
R 4006	(A,28,42)			RS1/16SS470J				R 4242	(A,5,26)			RS1/16SS101J			
R 4007	(A,51,32)			RS1/16SS470J				R 4244	(A,21,42)			RS1/16SS103J			B
R 4008	(A,5,24)			RS1/16SS0R0J				R 4260	(B,52,14)			RS1/16SS103J			
R 4010	(A,35,59)			RS1/16SS0R0J				R 4261	(B,54,14)			RS1/16SS103J			
R 4011	(A,25,47)			RS1/16SS103J				R 4262	(B,63,10)			RS1/16SS103J			
								R 4263	(B,25,31)			RS1/16SS103J			
R 4012	(A,26,53)			RS1/16SS103J				R 4264	(B,13,28)			RS1/16SS103J			
R 4015	(A,46,32)			RS1/16SS102J				R 4265	(A,14,20)			RS1/16SS103J			
R 4017	(A,25,56)			RS1/16SS103J				R 4266	(A,15,20)			RS1/16SS103J			
R 4018	(B,51,42)			RS1/16SS0R0J				R 4268	(B,24,31)			RS1/16SS103J			
R 4022	(B,19,44)			RS1/16SS330J											
								R 4270	(B,51,33)			RS1/16SS103J			
R 4029	(B,65,12)			RS1/16SS472J				R 4271	(B,51,32)			RS1/16SS103J			
R 4054	(A,25,53)			RS1/16SS103J				R 4272	(A,28,41)			RS1/16SS470J			C
R 4055	(A,25,42)			RS1/16SS103J				R 4273	(A,39,57)			RS1/16SS2400F			
R 4056	(A,26,42)			RS1/16SS103J				R 4274	(B,57,56)			RS1/16SS1001D			
R 4057	(A,24,45)			RS1/16SS103J											
								R 4275	(B,55,56)			RS1/16SS1001D			
R 4058	(A,25,45)			RS1/16SS103J				R 4276	(B,34,11)			RS1/16SS103J			
R 4059	(A,25,45)			RS1/16SS103J				R 4277	(B,55,48)			RS1/16SS103J			
R 4060	(A,26,45)			RS1/16SS103J				R 4278	(B,64,30)			RS1/16SS103J			
R 4063	(A,24,50)			RS1/16SS103J				R 4279	(B,25,12)			RS1/16SS103J			
R 4064	(A,25,50)			RS1/16SS103J											
								R 4280	(B,31,31)			RS1/16SS103J			
R 4066	(A,26,50)			RS1/16SS103J				R 4281	(B,33,12)			RS1/16SS103J			
R 4067	(A,24,53)			RS1/16SS103J				R 4282	(B,27,11)			RS1/16SS103J			
R 4068	(A,25,53)			RS1/16SS103J				R 4283	(B,30,31)			RS1/16SS103J			D
R 4070	(A,24,56)			RS1/16SS103J				R 4284	(B,47,12)			RS1/16SS103J			
R 4073	(A,25,47)			RS1/16SS103J											
								R 4285	(B,61,14)			RS1/16SS103J			
R 4074	(A,26,47)			RS1/16SS103J				R 4286	(A,44,57)			RS1/16SS0R0J			
R 4081	(A,5,36)			RS1/10SR0R0J				R 4287	(A,43,57)			RS1/16SS0R0J			
R 4084	(A,5,30)			RS1/16SS102J				R 4288	(B,66,28)			RS1/16SS103J			
R 4091	(A,48,29)			RS1/16SS225J				R 4289	(B,42,8)			RS1/16SS103J			
R 4095	(A,44,25)			RS1/16SS0R0J											
								R 4290	(B,52,44)			RS1/16SS0R0J			
R 4100	(B,21,43)			RS1/16SS470J				R 4291	(A,42,57)			RS1/16SS0R0J			
R 4101	(B,54,42)			RS1/16SS0R0J				R 4292	(A,41,57)			RS1/16SS0R0J			
R 4103	(B,14,69)			RS1/16SS220J				R 4293	(B,45,11)			RS1/16SS104J			
R 4105	(A,26,56)			RS1/16SS103J				R 4295	(B,27,14)			RS1/16SS103J			E
R 4111	(B,16,66)			RS1/16SS472J											
								R 4296	(B,65,10)			RS1/16SS222J			
R 4141	(B,58,84)			RS1/16SS103J				R 4297	(B,64,10)			RS1/16SS103J			
R 4151	(A,30,29)			RS1/16SS0R0J				R 4300	(B,25,14)			RS1/16SS103J			
R 4154	(B,67,28)			RS1/16SS0R0J				R 4302	(B,47,11)			RS1/16SS104J			
R 4155	(B,68,28)			RS1/16SS0R0J				R 4303	(A,22,53)			RS1/16SS101J			
R 4157	(A,31,29)			RS1/16SS0R0J											
								R 4307	(B,55,74)			RS1/16SS1200D			
R 4158	(B,31,39)			RAB4CQ471J				R 4308	(B,36,74)			RS1/16SS1200D			
R 4159	(B,31,42)			RAB4CQ471J				R 4309	(B,52,74)			RS1/16SS2400F			
R 4160	(B,32,44)			RAB4CQ471J				R 4310	(B,33,74)			RS1/16SS2400F			
R 4162	(B,32,47)			RAB4CQ471J				R 4314	(B,58,83)			RS1/16SS102J			F
R 4163	(A,31,41)			RS1/16SS470J											
								R 4315	(B,40,83)			RS1/16SS102J			
R 4164	(B,21,44)			RS1/16SS470J				R 4317	(B,20,5)			RS1/16SS0R0J			
R 4165	(A,30,41)			RS1/16SS470J				R 4381	(A,26,74)			RS1/16SS1802D			
R 4186	(A,27,40)			RS1/16SS101J											
R 4209	(A,25,56)			RS1/16SS103J											

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 4401 (A,8,48)
R 4402 (A,12,73)

RS1/16SS102J
RS1/16SS0R0J

R 4515 (B,17,34)
R 4525 (B,6,68)

RS1/10SR0R0J
RS1/16SS0R0J

A

R 4403 (A,11,49)
R 4404 (B,29,58)
R 4405 (B,29,56)
R 4407 (B,16,64)
R 4411 (B,21,58)

RS1/16SS0R0J
RS1/16SS102J
RS1/16SS105J
RS1/16SS471J
RS1/16SS220J

R 4529 (B,6,47)
R 4540 (B,7,69)
R 4543 (A,15,34)
R 4544 (A,14,34)
R 4545 (A,13,34)

RS1/16SS0R0J
RS1/16SS220J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

■

R 4412 (B,25,59)
R 4413 (A,16,73)
R 4415 (A,27,63)
R 4416 (A,18,58)
R 4417 (A,17,74)

RS1/16SS102J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS472J

R 4546 (A,12,34)
R 4547 (A,9,38)
R 4548 (A,9,37)
R 4549 (A,9,37)
R 4550 (A,9,36)

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

B

R 4418 (A,17,75)
R 4420 (A,21,68)
R 4421 (A,22,64)
R 4445 (B,19,47)
R 4446 (B,19,50)

RS1/16SS472J
RS1/16SS101J
RS1/16SS101J
RAB4CQ101J
RAB4CQ101J

R 4702 (A,75,65)
R 4704 (A,66,61)
R 4705 (B,70,60)
R 4706 (B,66,60)
R 4707 (B,65,60)

RS1/8SQ0R0J
RS1/8SQ0R0J
RS1/16SS220J
RS1/16SS105J
RS1/16SS105J

■

R 4447 (B,14,71)
R 4448 (A,25,70)
R 4449 (B,7,70)
R 4450 (B,6,67)
R 4451 (B,16,65)

RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS330J
RS1/16SS0R0J

R 4708 (B,65,62)
R 4709 (B,68,66)
R 4710 (B,65,64)
R 4711 (B,66,64)
R 4713 (B,68,67)

RS1/16SS2201D
RS1/16SS0R0J
RS1/16SS1003D
RS1/16SS183J
RS1/16SS1002D

C

R 4452 (B,14,65)
R 4453 (B,6,64)
R 4454 (B,6,66)
R 4455 (B,14,58)
R 4456 (B,6,56)

RS1/16SS561J
RS1/16SS561J
RS1/16SS561J
RS1/16SS220J
RS1/16SS220J

R 4714 (B,66,67)
R 4715 (B,66,63)
R 4716 (A,65,63)
R 4717 (B,68,60)
R 4721 (A,67,40)

RS1/16SS1503D
RS1/16SS1503D
RS1/16SS0R0J
RS1/16SS0R0J
RS1/8SQ0R0J

■

R 4457 (B,12,52)
R 4458 (B,13,52)
R 4459 (B,15,56)
R 4460 (B,15,55)
R 4461 (B,15,53)

RS1/16SS220J
RS1/16SS220J
RS1/16SS220J
RS1/16SS220J
RS1/16SS220J

R 4722 (A,71,31)
R 4723 (A,65,40)
R 4724 (B,65,36)
R 4725 (B,66,40)
R 4726 (B,66,42)

RS1/8SQ0R0J
RS1/8SQ0R0J
RS1/16SS220J
RS1/16SS105J
RS1/16SS105J

D

R 4462 (B,14,53)
R 4463 (B,28,50)
R 4464 (B,28,49)
R 4465 (B,28,49)
R 4466 (B,28,48)

RS1/16SS220J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 4727 (B,67,41)
R 4728 (B,72,38)
R 4729 (B,71,42)
R 4730 (B,73,38)
R 4731 (B,73,40)

RS1/16SS2702D
RS1/16SS105J
RS1/16SS1503D
RS1/16SS1002D
RS1/16SS1503D

■

R 4467 (B,27,47)
R 4468 (B,27,46)
R 4469 (B,27,45)
R 4470 (B,27,44)
R 4473 (B,25,71)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 4732 (B,68,40)
R 4733 (A,69,41)
R 4734 (B,70,40)
R 4735 (A,72,41)
R 4736 (B,65,38)
R 4737 (B,69,41)

RS1/16SS1203D
RS1/16SS0R0J
RS1/16SS223J
RS1/10SR102J
RS1/16SS0R0J
RS1/16SS4703D

E

R 4474 (B,23,71)
R 4475 (B,29,63)
R 4476 (B,29,62)
R 4477 (B,21,71)
R 4479 (B,18,71)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 4738 (B,63,28)
R 4739 (B,71,45)
R 4741 (A,64,50)
R 4742 (A,73,53)
R 4743 (A,64,48)

RS1/16SS103J
RS1/16SS0R0J
RS1/8SQ0R0J
RS1/8SQ0R0J
RS1/8SQ0R0J

■

R 4480 (B,22,73)
R 4481 (B,17,63)
R 4502 (B,17,43)
R 4503 (B,23,35)
R 4504 (B,22,35)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS103J
RS1/16SS101J
RS1/16SS101J

R 4744 (B,69,47)
R 4745 (B,64,48)
R 4746 (B,63,48)
R 4747 (B,63,49)
R 4749 (B,62,53)

RS1/16SS220J
RS1/16SS105J
RS1/16SS105J
RS1/16SS2702D
RS1/16SS1503D

F

R 4505 (B,18,42)
R 4507 (B,18,40)
R 4508 (B,18,38)
R 4510 (B,12,33)
R 4511 (B,21,41)

RS1/16SS103J
RS1/16SS221J
RS1/16SS221J
RS1/16SS6801D
RS1/16SS101J

R 4750 (B,67,55)
R 4751 (B,65,55)
R 4752 (B,65,50)
R 4753 (A,64,52)
R 4754 (B,65,52)
R 4755 (A,63,54)

RS1/16SS1002D
RS1/16SS1503D
RS1/16SS1203D
RS1/16SS0R0J
RS1/16SS223J
RS1/10SR102J

R 4512 (B,6,43)
R 4513 (B,17,35)
R 4514 (B,17,31)

RS1/16SS103J
RS1/10SR0R0J
RS1/10SR0R0J

R 4756 (B,66,48)

RS1/16SS0R0J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4757	(B,63,51)	RS1/16SS4703D		R 5015	(B,45,14)	RS1/16SS0R0J	A
R 4758	(B,72,40)	RS1/16SS0R0J		R 5016	(B,46,14)	RS1/16SS0R0J	
R 4759	(B,61,53)	RS1/16SS0R0J		R 5017	(A,42,32)	RS1/16SS0R0J	
R 4767	(A,38,18)	RS1/10SR0R0J		R 5020	(B,24,14)	RS1/16SS560J	
R 4768	(B,37,11)	RS1/10SR0R0J		R 5021	(B,24,29)	RS1/16SS0R0J	
R 4769	(A,26,17)	RS1/16SS0R0J		R 5022	(B,25,29)	RS1/16SS0R0J	
R 4772	(A,41,13)	RS1/16SS103J		R 5023	(B,25,29)	RS1/16SS101J	
R 4773	(A,33,7)	RS1/10SR0R0J		R 5024	(B,25,31)	RS1/16SS121J	
R 4775	(A,40,14)	RS1/16SS0R0J		R 5025	(B,27,29)	RS1/16SS121J	
R 4776	(A,64,28)	RS1/10SR332J		R 5026	(B,64,14)	RS1/16SS121J	
R 4777	(A,64,27)	RS1/10SR332J		R 5027	(B,63,14)	RS1/16SS680J	
R 4778	(A,27,19)	RS1/16SS103J		R 5028	(B,65,14)	RS1/16SS121J	
R 4779	(A,28,28)	RS1/16SS103J		R 5029	(A,17,47)	RS1/16SS102J	B
R 4780	(A,28,27)	RS1/16SS101J		R 5030	(A,18,53)	RS1/16SS102J	
R 4790	(A,51,24)	RS1/16SS101J		R 5031	(A,17,47)	RS1/16SS102J	
R 4791	(A,47,26)	RS1/16SS101J		R 5032	(B,16,14)	RS1/16SS560J	
R 4792	(A,50,18)	RS1/16SS0R0J		R 5033	(B,18,14)	RS1/16SS221J	
R 4793	(A,42,17)	RS1/16SS0R0J		R 5034	(B,60,14)	RS1/16SS681J	
R 4794	(A,50,16)	RS1/16SS103J		R 5036	(B,49,14)	RS1/16SS101J	
R 4795	(A,47,22)	RS1/16SS683J		R 5037	(B,14,28)	RS1/16SS101J	
R 4798	(A,43,18)	RS1/16SS104J		R 5040	(A,11,22)	RS1/16SS681J	C
R 4799	(A,45,22)	RS1/16SS0R0J		R 5041	(A,12,22)	RS1/16SS681J	
R 4800	(A,45,21)	RS1/16SS0R0J		R 5042	(A,10,22)	RS1/16SS471J	
R 4801	(A,44,14)	RS1/16SS0R0J		R 5043	(A,9,22)	RS1/16SS0R0J	
R 4802	(A,44,24)	RS1/16SS0R0J		R 5044	(A,8,22)	RS1/16SS471J	
R 4803	(A,52,26)	RS1/16SS101J		R 5045	(A,66,21)	RS1/16SS0R0J	
R 4804	(A,51,25)	RS1/16SS103J		R 5046	(B,56,14)	RS1/16SS0R0J	
R 4805	(A,45,26)	RS1/16SS103J		R 5047	(B,58,14)	RS1/16SS680J	
R 4845	(A,66,60)	RS1/8SQ0R0J		R 5048	(B,53,47)	RS1/16SS331J	
R 4901	(A,40,32)	RS1/16SS103J		R 5049	(B,55,47)	RS1/16SS331J	
R 4902	(A,72,27)	RS1/16SS222J		R 5053	(B,9,28)	RS1/16SS560J	
R 4903	(A,38,32)	RS1/16SS470J		R 5054	(B,8,28)	RS1/16SS560J	
R 4904	(A,66,29)	RS1/16SS222J		R 5055	(B,12,28)	RS1/16SS560J	D
R 4905	(A,66,28)	RS1/16SS221J		R 5056	(B,11,28)	RS1/16SS560J	
R 4906	(A,66,27)	RS1/16SS103J		R 5057	(B,10,28)	RS1/16SS560J	
R 4907	(A,66,25)	RS1/16SS0R0J		R 5059	(B,32,14)	RS1/16SS560J	
R 4911	(A,57,38)	RS1/16SS151J		R 5060	(B,33,14)	RS1/16SS560J	
R 4912	(B,63,42)	RS1/16SS0R0J		R 5061	(B,29,14)	RS1/16SS560J	
R 4913	(B,61,42)	RS1/16SS0R0J		R 5062	(B,30,14)	RS1/16SS560J	
R 4914	(A,37,32)	RS1/16SS750J		R 5063	(B,26,12)	RS1/16SS0R0J	
R 4915	(A,41,25)	RS1/16SS0R0J		R 5064	(B,33,14)	RS1/16SS0R0J	
R 4916	(B,36,7)	RS1/16SS0R0J		R 5065	(B,31,14)	RS1/16SS560J	
R 4918	(A,33,26)	RS1/16SS0R0J		R 5090	(B,58,28)	RS1/16SS0R0J	
R 4934	(B,33,50)	RS1/16SS0R0J		R 5099	(B,18,29)	RS1/16SS0R0J	
R 4937	(A,25,13)	RS1/16SS103J		R 5100	(B,54,48)	RS1/16SS331J	E
R 4938	(A,24,13)	RS1/16SS103J		R 5101	(A,56,44)	RS1/16SS680J	
R 4939	(A,23,13)	RS1/16SS103J		R 5102	(A,19,51)	RS1/16SS680J	
R 4941	(B,55,41)	RS1/16SS431J		R 5103	(B,22,29)	RS1/16SS560J	
R 4942	(B,54,45)	RS1/16SS102J		R 5104	(A,21,49)	RS1/16SS680J	
R 4945	(B,25,38)	RS1/16SS103J		R 5105	(A,21,50)	RS1/16SS680J	
R 4946	(A,28,13)	RS1/16SS102J		R 5106	(A,20,51)	RS1/16SS680J	
R 5003	(B,64,28)	RS1/16SS0R0J		R 5107	(B,20,11)	RS1/16SS101J	
R 5004	(B,65,28)	RS1/16SS0R0J		R 5114	(B,28,29)	RS1/16SS101J	
R 5006	(B,23,14)	RS1/16SS0R0J		R 5115	(B,28,31)	RS1/16SS101J	
R 5007	(B,15,14)	RS1/16SS471J		R 5116	(B,31,29)	RS1/16SS0R0J	
R 5008	(B,28,14)	RS1/16SS151J		R 5117	(B,31,29)	RS1/16SS0R0J	
R 5009	(B,13,14)	RS1/16SS471J		R 5119	(B,25,14)	RS1/16SS101J	F
R 5012	(B,43,14)	RS1/16SS0R0J		R 5121	(B,35,29)	RS1/10SR0R0J	
R 5013	(B,44,14)	RS1/16SS0R0J		R 5122	(B,35,30)	RS1/10SR0R0J	
R 5014	(B,45,14)	RS1/16SS0R0J		R 5125	(A,66,23)	RS1/16SS222J	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 5126 (A,66,22)
R 5127 (B,63,12)
R 5128 (B,64,12)
R 5129 (B,22,12)

RS1/16SS222J
RS1/16SS182J
RS1/16SS182J
RS1/16SS101J

C 4027 (B,50,41)
C 4029 (B,41,42)
C 4030 (B,48,43) 1 uF
C 4031 (B,41,46)

CKSSYB104K10
CKSSYB104K10
DCH1246
CKSSYB104K10

R 5130 (B,37,32)
R 5131 (B,38,29)
R 5132 (A,11,20)
R 5315 (A,17,83)
R 5316 (A,17,84)

RS1/16SS103J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4034 (B,49,44)
C 4037 (B,41,39)
C 4038 (B,40,44) 1 uF
C 4039 (B,37,47)
C 4040 (B,45,47)

CKSSYB104K10
CKSSYB104K10
DCH1246
CKSSYB104K10
CKSSYB104K10

R 5317 (A,17,85)
R 5318 (A,17,86)
R 5326 (A,65,85)
R 5327 (A,65,85)
R 5328 (A,65,84)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4041 (B,37,45)
C 4042 (B,49,47)
C 4043 (B,47,47)
C 4044 (B,41,47)
C 4045 (B,40,48)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

R 5329 (A,65,83)
R 5351 (A,5,16)
R 5352 (A,6,16)
R 5353 (A,7,16)
R 5354 (A,8,16)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4047 (B,50,49)
C 4048 (B,45,49)
C 4050 (B,42,49)
C 4051 (B,45,43) 22 uF
C 4052 (B,44,47) 22 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1256
CCG1254

R 5355 (A,9,16)
R 5356 (A,10,16)
R 5357 (A,11,16)
R 5358 (A,12,16)
R 5359 (A,12,16)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4053 (B,37,37) 22 uF
C 4054 (B,53,34) 10 uF
C 4055 (B,51,36)
C 4056 (A,37,15) 10 uF
C 4057 (B,36,50) 10 uF

CCG1254
CCG1192
CKSSYB104K10
CCG1192
CCG1192

R 5360 (A,13,16)
R 5361 (A,14,16)
R 5362 (A,15,16)
R 5376 (A,60,16)
R 5377 (A,59,16)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4058 (B,39,47)
C 4059 (B,48,49)
C 4062 (B,57,55)
C 4063 (B,55,55)
C 4064 (B,45,37) 10 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1192

R 5378 (A,58,16)
R 5379 (A,57,16)

RS1/16SS0R0J
RS1/16SS0R0J

C 4065 (B,38,40)
C 4066 (B,49,41)
C 4067 (B,49,39)
C 4068 (B,41,40)
C 4069 (B,42,43) 1 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1246

CAPACITORS

C 4001 (A,52,29)
C 4002 (A,48,31)
C 4003 (A,44,31)
C 4004 (A,44,29)
C 4005 (B,53,37) 10 uF

CCSSCJ3R0C50
CCSSCH4R0C50
CCSSCH180J50
CCSSCH8R0D50
CCG1192

C 4070 (B,46,38)
C 4071 (B,47,35)
C 4072 (B,40,33) 10 uF
C 4073 (B,45,32) 10 uF
C 4075 (B,42,37)

CKSSYB104K10
CKSSYB104K10
CCG1192
CCG1192
CKSSYB104K10

C 4006 (B,51,38)
C 4007 (B,53,39) 2.2 uF
C 4008 (B,51,39)
C 4009 (B,41,37)
C 4010 (B,35,32) 10 uF

CKSSYB104K10
CCG1218
CKSSYB104K10
CKSSYB104K10
CCG1192

C 4076 (B,36,42) 10 uF
C 4077 (B,54,50) 10 uF
C 4078 (B,49,37)
C 4079 (A,44,26)
C 4080 (B,53,52)

CCG1192
CCG1192
CKSSYB104K10
CCSSCH101J50
CKSSYB104K10

C 4011 (B,39,37)
C 4012 (B,38,37)
C 4013 (B,45,34) 10 uF
C 4014 (B,46,35)
C 4015 (B,46,39)

CKSSYB104K10
CKSSYB104K10
CCG1192
CKSSYB104K10
CKSSYB104K10

C 4087 (B,44,39) 22 uF
C 4301 (B,60,67)
C 4302 (A,60,67)
C 4303 (B,52,64)
C 4304 (B,52,66)

DCH1256
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4016 (B,47,41)
C 4017 (B,47,44)
C 4018 (B,47,45)
C 4019 (B,45,40)
C 4020 (B,43,42)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4305 (B,51,68)
C 4306 (A,50,68)
C 4307 (A,50,70)
C 4308 (A,50,72)
C 4309 (B,53,68) 4.7 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1201

C 4021 (B,43,43)
C 4022 (B,43,44)
C 4023 (B,39,39)
C 4024 (B,38,42)
C 4025 (B,39,45)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4310 (B,53,71)
C 4311 (A,60,69)
C 4312 (B,59,71)
C 4313 (B,57,72)
C 4314 (A,60,76)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4026 (B,50,39)

CKSSYB104K10

C 4315 (A,60,78)

CKSSYB104K10

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
C 4316 (B,60,78)	CKSSYB104K10	C 4417 (A,20,64)	CKSSYB103K16	A
C 4317 (B,59,78) 4.7 uF	CCG1201	C 4418 (A,18,64)	CKSSYB103K16	
C 4318 (A,50,76)	CKSSYB104K10	C 4419 (A,18,65)	CKSSYB103K16	
C 4319 (B,51,76)	CKSSYB104K10	C 4420 (A,18,66)	CKSSYB103K16	
C 4320 (A,50,79)	CKSSYB104K10	C 4421 (A,18,67)	CKSSYB103K16	
C 4321 (B,60,69)	CKSSYB104K10	C 4422 (A,20,68)	CKSSYB103K16	
C 4322 (B,60,71)	CKSSYB104K10	C 4423 (A,27,66)	CKSSYB103K16	
C 4323 (B,57,74)	CKSSYB104K10	C 4424 (B,27,66)	CKSSYB103K16	
C 4324 (B,60,76)	CKSSYB104K10	C 4425 (A,26,68)	CKSSYB103K16	
C 4325 (A,42,67)	CKSSYB104K10	C 4426 (A,19,68)	CKSSYB103K16	
C 4326 (B,41,67)	CKSSYB104K10	C 4427 (A,18,61)	CKSSYB104K10	
C 4327 (B,34,64)	CKSSYB104K10	C 4428 (A,18,60) 1 uF	DCH1246	
C 4328 (B,34,65)	CKSSYB104K10	C 4429 (A,27,64) 1 uF	DCH1246	
C 4329 (A,31,68)	CKSSYB104K10	C 4430 (A,27,65)	CKSSYB104K10	B
C 4330 (B,31,68)	CKSSYB104K10	C 4431 (A,18,61)	CKSSYB103K16	
C 4331 (A,31,70)	CKSSYB104K10	C 4432 (A,27,66)	CKSSYB103K16	
C 4332 (A,31,72)	CKSSYB104K10	C 4433 (B,27,59)	CKSSYB471K50	
C 4333 (B,29,70) 4.7 uF	CCG1201	C 4435 (A,23,68)	CKSSYB104K10	
C 4334 (B,34,72)	CKSSYB104K10	C 4436 (A,24,68) 10 uF	CCG1192	
C 4335 (A,42,69)	CKSSYB104K10	C 4437 (A,23,64)	CKSSYB104K10	
C 4336 (A,42,71)	CKSSYB104K10	C 4438 (A,25,64) 10 uF	CCG1192	
C 4337 (B,39,72)	CKSSYB104K10	C 4439 (B,27,60)	CKSSYB103K16	C
C 4338 (B,51,70)	CKSSYB104K10	C 4501 (B,12,46)	CKSSYB104K10	
C 4339 (B,51,72)	CKSSYB104K10	C 4502 (B,6,41)	CKSSYB104K10	
C 4340 (A,44,72)	CKSSYB104K10	C 4503 (B,5,39)	CKSSYB104K10	
C 4341 (B,53,76)	CKSSYB104K10	C 4504 (B,12,34)	CKSSYB103K16	
C 4342 (B,51,79)	CKSSYB104K10	C 4505 (B,15,34)	CKSSYB103K16	
C 4343 (B,41,69)	CKSSYB104K10	C 4506 (B,14,32) 10 uF	CCG1192	
C 4344 (B,40,71)	CKSSYB104K10	C 4507 (B,14,33)	CKSSYB103K16	
C 4345 (B,34,76)	CKSSYB104K10	C 4508 (B,19,38)	CKSSYB103K16	
C 4346 (B,31,76)	CKSSYB104K10	C 4509 (B,9,33) 10 uF	CCG1192	
C 4347 (A,31,76)	CKSSYB104K10	C 4510 (B,16,45)	CKSSYB102K50	
C 4348 (A,31,78)	CKSSYB104K10	C 4511 (B,7,45) 10 uF	CCG1192	
C 4349 (A,42,76)	CKSSYB104K10	C 4516 (B,18,41)	CCSSCH101J50	
				D
C 4350 (A,42,78)	CKSSYB104K10	C 4704 (B,68,59)	CKSRYB105K10	
C 4351 (B,41,78)	CKSSYB104K10	C 4706 (B,66,65)	CCSSCH470J50	
C 4352 (B,39,77) 4.7 uF	CCG1201	C 4707 (B,65,65)	CKSSYB471K50	
C 4353 (A,62,72)	CKSSYB104K10	C 4708 (A,72,65) 47 uF	CCG1229	
C 4354 (B,41,76)	CKSSYB104K10	C 4709 (A,69,65) 100 uF	CCG1232	
C 4355 (B,31,70)	CKSSYB104K10	C 4711 (B,65,63)	CCSSCH220J50	
C 4356 (B,52,76)	CKSSYB104K10	C 4712 (B,74,64)	CKSSYB103K16	
C 4357 (B,40,82)	CKSSYB103K16	C 4722 (B,64,38)	CKSRYB105K10	
C 4358 (B,58,82)	CKSSYB103K16	C 4723 (B,72,40)	CKSSYB103K16	E
C 4361 (B,31,72)	CKSSYB104K10	C 4724 (B,71,40)	CCSSCH470J50	
C 4362 (B,34,73)	CKSSYB104K10	C 4725 (B,71,41)	CKSSYB471K50	
C 4363 (B,31,78)	CKSSYB104K10	C 4726 (A,70,34) 47 uF	CCG1229	
C 4364 (B,39,74)	CKSSYB104K10	C 4727 (A,71,37) 100 uF	CCG1232	F
C 4381 (A,27,74)	CKSSYB104K10	C 4729 (B,68,41)	CCSSCH220J50	
C 4382 (A,26,72)	CKSSYB104K10	C 4730 (B,69,32)	CKSSYB103K16	
C 4401 (A,10,49)	CKSSYB471K50	C 4742 (B,66,47)	CKSRYB105K10	
C 4402 (A,6,72)	CKSSYB104K10	C 4744 (B,65,53)	CCSSCH470J50	
C 4403 (A,10,72)	CKSSYB103K16	C 4745 (B,63,53)	CKSSYB471K50	
C 4404 (B,31,53)	CCSSCH8R0D50	C 4746 (A,71,53) 47 uF	CCG1229	
C 4405 (B,30,58)	CCSSCH8R0D50	C 4747 (A,68,53) 100 uF	CCG1232	
C 4406 (B,23,59)	CKSSYB103K16	C 4749 (B,63,50)	CCSSCH220J50	
C 4412 (A,23,66)	CKSSYB103K16	C 4750 (B,72,52)	CKSSYB103K16	
C 4413 (A,20,69)	CKSSYB103K16	C 4766 (A,36,18) 4.7 uF	CCG1201	
C 4414 (A,20,66)	CKSSYB103K16	C 4767 (A,34,18) 4.7 uF	CCG1201	
C 4415 (A,21,65)	CKSSYB103K16	C 4768 (A,27,17)	CKSSYB473K16	
C 4416 (A,21,68)	CKSSYB103K16	C 4776 (A,66,24)	CKSSYB104K10	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 4778 (A,28,26) CKSSYB473K16
 C 4790 (A,48,23) CCSSCH101J50
 C 4791 (A,46,24) CKSSYB104K10
 C 4792 (A,45,19) CKSSYB104K10

L 2815 (B,57,51) Chip Beads VTL1127
 L 2816 (B,57,52) Chip Beads VTL1127
 L 2817 (B,57,53) Chip Beads VTL1127
 L 2818 (B,57,54) Chip Beads VTL1127
 L 2819 (B,57,55) Chip Beads VTL1127
 L 2820 (B,57,56) Chip Beads VTL1127
 L 2821 (B,57,57) Chip Beads VTL1127

C 4793 (A,50,20) CKSSYB222K50
 C 4794 (A,43,16) CKSSYB104K10
 C 4796 (A,20,60) 4.7 uF CCG1201
 C 4797 (A,21,57) 4.7 uF CCG1201
 C 4798 (A,44,23) CKSSYB104K10

L 2822 (A,72,53) Inductor XTL3010
 L 2823 (A,65,51) Inductor XTL3010
 L 2829 (A,72,56) Chip Ferrite Bead BTX1047
 L 2830 (B,72,41) Chip Beads VTL1127
 L 2831 (B,71,41) Chip Beads VTL1127

C 4799 (A,50,26) CCSSCH101J50
 C 4800 (A,28,61) CKSSYB473K16
 C 4901 (A,41,24) 1 uF DCH1246
 C 4902 (B,59,44) CKSSYB104K10
 C 4903 (A,68,25) CKSSYB104K10

L 2832 (B,70,36) Chip Beads VTL1127
 L 2833 (B,70,37) Chip Beads VTL1127
 L 2834 (B,69,37) Chip Beads VTL1127
 L 2835 (B,68,38) Chip Beads VTL1127
 L 3001 (A,39,45) Inductor CTF1734

C 4904 (A,66,26) CKSSYB102K50
 C 4914 (B,60,46) CKSSYB103K16
 C 4915 (A,32,26) CKSSYB104K10
 C 4933 (A,57,36) CCSSCH101J50
 C 5001 (A,74,22) 22 uF DCH1256
 C 5003 (A,68,17) 22 uF DCH1256

L 3002 (A,41,45) Inductor CTF1734
 L 3003 (A,39,46) Inductor CTF1734
 L 3004 (A,39,48) Inductor CTF1734
 L 3005 (A,41,50) Inductor CTF1734
 L 3006 (A,39,51) Inductor CTF1734

C 5007 (B,41,12) CKSRYB102K50

L 3007 (A,46,46) Inductor CTF1734
 L 3008 (A,46,44) Inductor CTF1734
 L 3009 (A,47,49) Inductor CTF1734
 L 3010 (A,48,47) Inductor CTF1734
 L 3011 (A,48,49) Inductor CTF1734

E
Unit Number : CXX6365
Unit Name : Monitor Unit(Service)

MISCELLANEOUS

IC 2701 (A,100,46) IC AK4187VN
 IC 2801 (B,35,70) Regulator IC MM3411A15N
 IC 2802 (B,35,75) Regulator IC MM3411A25N
 IC 2803 (B,67,49) IC BU16002KVT
 IC 3001 (A,30,51) IC TC90193SBG

L 3012 (A,40,55) Inductor CTF1734
 L 3013 (A,40,44) Inductor CTF1734
 L 3014 (A,40,43) Inductor CTF1734
 L 3015 (A,40,42) Inductor CTF1734
 L 3016 (A,39,42) Inductor CTF1734

IC 3101 (A,106,72) IC BD81A04EFV-M
 IC 3201 (A,104,17) IC R1290K103A
 Q 3001 (B,18,41) Transistor LSAR523UB
 Q 3002 (A,16,39) Transistor LSCR523UB

L 3017 (A,38,42) Inductor CTF1734
 L 3018 (A,36,42) Inductor CTF1734
 L 3019 (A,35,42) Inductor CTF1734
 L 3020 (A,34,42) Inductor CTF1734
 L 3021 (A,30,43) Inductor CTF1740

Q 3201 (A,106,26) Transistor 2SA1577
 Q 3202 (A,110,13) Transistor LTC024EEB
 Q 3301 (A,57,16) Transistor LSAR523UB
 D 3101 (A,105,60) Diode RB060M-30
 D 3201 (B,106,16) Diode DB3S308F0

L 3022 (A,29,43) Inductor CTF1734
 L 3023 (A,28,41) Inductor CTF1734
 L 3024 (A,27,41) Inductor CTF1734
 L 3025 (B,9,44) Inductor CTF1545
 L 3104 (A,105,65) Inductor CTF1545

D 3202 (B,100,23) Diode DB3S308F0
 D 3203 (B,103,23) Diode DB3S308F0
 D 3204 (A,95,22) Diode RB162M-40
 L 2801 (B,66,37) Chip Beads VTL1127

L 3105 (A,99,62) Inductor CTH1558
 L 3201 (A,102,23) Choke Coil 22 uH CTH1426
 L 3301 (A,68,19) Inductor ATL7054
 L 3302 (B,42,35) Inductor CTF1635
 TH3301 (A,131,20) Thermistor CCX1084

L 2802 (B,65,37) Chip Beads VTL1127
 L 2803 (B,64,36) Chip Beads VTL1127
 L 2804 (B,62,37) Chip Beads VTL1127
 L 2805 (B,63,38) Chip Beads VTL1127
 L 2806 (B,62,38) Chip Beads VTL1127

X 3001 (A,17,48) Resonator 27.000 MHz CSS1768
 CN2702 (A,127,30) Connector CKS6601
 CN2703 (A,114,48) Connector CKS6063
 CN2704 (A,58,69) Connector CKS6646
 CN2705 (A,121,17) Connector CKS6548

L 2807 (B,60,42) Chip Beads VTL1127
 L 2808 (B,63,40) Chip Beads VTL1127
 L 2809 (B,59,43) Chip Beads VTL1127
 L 2810 (B,59,44) Chip Beads VTL1127
 L 2811 (B,59,45) Chip Beads VTL1127

CN3301 (A,34,31) Connector CKS6602

L 2812 (B,59,46) Chip Beads VTL1127
 L 2813 (B,57,49) Chip Beads VTL1127
 L 2814 (B,57,50) Chip Beads VTL1127

RESISTORS

R 2704 (A,97,55) RS1/16SS471J
 R 2705 (A,97,56) RS1/16SS471J
 R 2706 (A,97,57) RS1/16SS471J
 R 2715 (A,100,41) RS1/16SS0R0J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 2716	(A,101,41)	RS1/16SS0R0J		R 3018	(A,40,59)	RS1/16SS472J	
R 2717	(A,100,42)	RS1/16SS621J		R 3019	(A,40,60)	RS1/16SS472J	
R 2718	(A,101,42)	RS1/16SS181J		R 3022	(A,42,43)	RS1/16SS151J	A
R 2719	(A,98,43)	RS1/16SS201J		R 3023	(A,41,42)	RS1/16SS151J	
				R 3024	(A,40,40)	RS1/16SS151J	
R 2720	(A,102,43)	RS1/16SS620J		R 3025	(A,39,40)	RS1/16SS151J	
R 2724	(A,97,49)	RS1/16SS121J					
R 2725	(A,101,50)	RS1/16SS0R0J		R 3026	(A,38,40)	RS1/16SS151J	
R 2726	(A,104,49)	RS1/16SS0R0J		R 3028	(A,36,40)	RS1/16SS151J	
				R 3029	(A,35,40)	RS1/16SS151J	
R 2801	(B,66,36)	RS1/16SS221J		R 3031	(A,34,40)	RS1/16SS151J	
R 2802	(B,58,36)	RS1/16SS221J					
R 2803	(B,60,36)	RS1/16SS221J		R 3038	(A,30,41)	RS1/16SS680J	
R 2804	(B,59,37)	RS1/16SS221J		R 3040	(A,29,37)	RS1/16SS470J	
R 2805	(B,60,37)	RS1/16SS221J		R 3041	(A,28,39)	RS1/16SS470J	
				R 3042	(B,11,57)	RS1/16SS0R0J	B
R 2806	(B,59,38)	RS1/16SS221J					
R 2807	(B,58,42)	RS1/16SS221J		R 3043	(A,27,39)	RS1/16SS151J	
R 2808	(B,61,40)	RS1/16SS221J		R 3044	(B,20,58)	RS1/16SS472J	
R 2809	(B,57,43)	RS1/16SS221J		R 3047	(B,14,41)	RS1/16SS912J	
R 2810	(B,57,45)	RS1/16SS221J		R 3048	(B,22,60)	RS1/16SS472J	
R 2811	(B,57,46)	RS1/16SS221J		R 3049	(B,14,43)	RS1/16SS103J	
R 2812	(B,56,47)	RS1/16SS221J		R 3050	(B,15,40)	RS1/16SS103J	
R 2813	(B,55,49)	RS1/16SS221J		R 3051	(B,15,43)	RS1/16SS391J	
R 2814	(B,55,50)	RS1/16SS221J		R 3053	(A,22,63)	RS1/16SS472J	
R 2815	(B,55,51)	RS1/16SS221J		R 3054	(A,24,63)	RS1/16SS472J	
R 2816	(B,55,52)	RS1/16SS221J		R 3055	(A,23,63)	RS1/16SS472J	C
R 2817	(B,55,53)	RS1/16SS221J		R 3056	(A,16,53)	RS1/16SS472J	
R 2818	(B,55,54)	RS1/16SS221J		R 3057	(A,16,54)	RS1/16SS472J	
R 2819	(B,55,55)	RS1/16SS221J		R 3058	(B,19,55)	RS1/16SS472J	
R 2820	(B,55,56)	RS1/16SS221J		R 3059	(A,16,55)	RS1/16SS472J	
R 2821	(B,55,57)	RS1/16SS221J		R 3060	(A,21,63)	RS1/16SS472J	
R 2822	(B,74,49)	RS1/16SS103J		R 3061	(A,18,59)	RS1/16SS472J	
R 2824	(B,68,57)	RS1/16SS1000D		R 3064	(A,20,49)	RS1/16SS105J	
R 2825	(B,66,57)	RS1/16SS1000D		R 3065	(A,18,51)	RS1/16SS471J	
R 2826	(B,65,56)	RS1/16SS1000D		R 3073	(B,26,48)	RS1/16SS0R0J	
R 2827	(B,63,57)	RS1/16SS1000D		R 3074	(A,20,42)	RS1/16SS152J	
R 2828	(B,61,56)	RS1/16SS1000D		R 3077	(A,16,56)	RS1/16SS470J	D
R 2834	(B,72,39)	RS1/16SS221J		R 3078	(A,16,58)	RS1/16SS273J	
R 2835	(B,71,39)	RS1/16SS221J		R 3079	(A,16,57)	RS1/16SS470J	
R 2836	(B,69,34)	RS1/16SS221J		R 3080	(A,19,63)	RS1/16SS470J	
R 2837	(B,69,36)	RS1/16SS221J		R 3081	(A,20,63)	RS1/16SS470J	
R 2838	(B,68,36)	RS1/16SS221J		R 3083	(A,15,42)	RS1/16SS122J	
R 2839	(B,67,36)	RS1/16SS221J		R 3089	(B,13,47)	RS1/10SR0R0J	
R 2857	(B,76,49)	RS1/16SS103J		R 3091	(A,17,59)	RS1/16SS472J	
R 2858	(B,79,48)	RS1/16SS103J		R 3094	(A,17,56)	RS1/16SS472J	
R 2859	(B,74,52)	RS1/16SS103J		R 3095	(A,15,59)	RS1/16SS273J	
R 2861	(B,62,75)	RS1/10SR0R0J					
				R 3100	(B,25,70)	RS1/16SS0R0J	E
R 2865	(B,79,49)	RS1/16SS221J		R 3103	(B,107,68)	RS1/16SS104J	
R 3001	(A,43,43)	RS1/16SS151J		R 3104	(B,106,68)	RS1/16SS154J	
R 3002	(A,43,45)	RS1/16SS151J		R 3105	(A,108,77)	RS1/16SS273J	
R 3003	(A,43,46)	RS1/16SS151J					
R 3004	(A,44,46)	RS1/16SS151J		R 3106	(A,109,77)	RS1/16SS511J	
				R 3108	(B,98,68)	RS1/16SS1203D	
R 3005	(A,43,50)	RS1/16SS151J		R 3110	(B,96,68)	RS1/16SS1003D	
R 3006	(A,43,51)	RS1/16SS151J		R 3116	(A,122,64)	RS1/16SS3603D	
R 3007	(A,45,43)	RS1/16SS151J					
R 3008	(A,46,42)	RS1/16SS151J		R 3117	(A,121,65)	RS1/16SS2402D	
R 3009	(A,47,47)	RS1/16SS151J		R 3120	(A,121,73)	RS1/16SS0R0J	
				R 3121	(A,121,74)	RS1/16SS0R0J	F
R 3010	(A,47,42)	RS1/16SS151J		R 3202	(A,101,15)	RS1/16SS103J	
R 3011	(A,48,45)	RS1/16SS151J					
R 3012	(A,42,55)	RS1/16SS151J		R 3203	(B,103,16)	RS1/10SR9102D	
R 3017	(A,40,57)	RS1/16SS472J		R 3204	(B,103,19)	RS1/10SR1802D	

1

Circuit Symbol and No.

R 3205 (B,102,14)
R 3206 (B,101,14)

A

R 3207 (A,105,24)
R 3208 (A,106,12)
R 3209 (B,105,24)
R 3210 (B,106,28)
R 3211 (A,107,13)

■

R 3212 (A,108,13)
R 3213 (A,108,15)
R 3214 (A,98,24)
R 3216 (A,99,14)

B

R 3217 (A,102,14)
R 3218 (A,102,11)
R 3219 (A,99,12)
R 3301 (A,55,28)
R 3302 (A,53,33)

■

R 3303 (A,55,35)
R 3304 (A,57,34)
R 3305 (A,59,29)
R 3306 (A,59,31)
R 3307 (A,62,29)

C

R 3308 (A,63,31)
R 3309 (A,66,29)
R 3310 (A,66,31)
R 3311 (A,69,29)
R 3312 (A,70,31)

■

R 3313 (A,68,25)
R 3314 (A,67,23)
R 3315 (A,64,25)
R 3316 (A,64,23)
R 3317 (A,61,25)

D

R 3318 (A,60,23)
R 3319 (A,57,25)
R 3320 (A,57,23)
R 3321 (A,55,23)

■

R 3322 (A,55,27)
R 3323 (B,30,31)
R 3324 (A,23,37)
R 3327 (A,27,37)

R 3328 (A,28,37)
R 3330 (A,54,20)
R 3332 (A,54,17)
R 3333 (A,59,20)

E

R 3334 (A,58,18)
R 3336 (A,61,15)
R 3339 (A,61,16)
R 3344 (A,131,17)

CAPACITORS

■

C 2705 (A,96,45) 10 uF
C 2706 (A,97,46)
C 2707 (A,100,49)
C 2708 (A,99,51) 10 uF
C 2803 (A,57,48)

F

C 2804 (B,56,48)
C 2805 (B,59,55)
C 2806 (A,61,53)
C 2807 (B,72,56)
C 2808 (B,73,56)

2

Part No.

RS1/16SS203J
RS1/16SS104J

RS1/16SS103J
RS1/16SS472J
RS1/10SR1003D
RS1/10SR9101D
RS1/16SS6800D

RS1/16SS1502D
RS1/16SS8201D
RS1/10SR2R2J
RS1/10SR1203D

RS1/10SR3001D
RS1/10SR1502D
RS1/10SR472J
RS1/10SR4R7J
RS1/10SR56R0D

RS1/10SR1800D
RS1/10SR2R2J
RS1/10SR47R0D
RS1/10SR0R0J
RS1/10SR39R0D

RS1/10SR4R7J
RS1/10SR1000D
RS1/10SR8R2J
RS1/10SR1300D
RS1/10SR0R0J

RS1/10SR1000D
RS1/10SR8R2J
RS1/10SR39R0D
RS1/10SR4R7J
RS1/10SR47R0D

RS1/10SR0R0J
RS1/10SR1800D
RS1/10SR2R2J
RS1/10SR33R0D

RS1/10SR2R4J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

RS1/16SS473J
RS1/16SS472J
RS1/16SS105J
RS1/16SS682J

RS1/16SS0R0J
RS1/16SS101J
RS1/16SS0R0J
RS1/16SS183J

DCH1201
CKSSYB104K10
CKSSYB104K10
DCH1201
CKSSYB104K10

CKSSYB103K16
CKSSYB103K16
CKSSYB104K10
CKSSYB103K16
CKSSYB104K10

3

Circuit Symbol and No.

C 2809 (A,63,53)
C 2810 (A,63,52)
C 2814 (A,65,54)
C 2816 (A,70,53) 10 uF
C 2819 (B,38,70)

C 2820 (B,38,76)
C 2821 (B,32,75)
C 2822 (B,32,70)
C 2823 (B,67,39)
C 2824 (B,67,40)

C 2825 (B,76,48)
C 2826 (B,75,48)
C 2830 (B,79,51)
C 3002 (A,39,47)
C 3003 (A,39,49)

C 3004 (A,40,52)
C 3005 (A,40,53)
C 3006 (A,40,56)
C 3007 (A,37,42)
C 3008 (A,35,61)

C 3010 (A,32,43)
C 3011 (A,31,60)
C 3013 (A,31,42)
C 3014 (A,30,60)

C 3015 (A,29,41)
C 3019 (B,12,42) 10 uF
C 3021 (A,27,43)
C 3022 (A,27,60)

C 3023 (B,16,44)
C 3024 (A,23,40)
C 3025 (A,21,40)
C 3026 (A,23,41)
C 3027 (A,22,52)

C 3028 (A,21,54)
C 3029 (A,22,57)
C 3030 (A,19,44)
C 3031 (A,24,43)
C 3032 (A,22,43)

C 3033 (A,22,46)
C 3037 (A,20,47)
C 3038 (A,22,48)
C 3040 (A,18,42)
C 3041 (A,16,51)

C 3042 (A,25,73) 4.7 uF
C 3043 (A,21,48)
C 3044 (A,16,59)
C 3046 (B,9,45)
C 3101 (A,114,72) 10 uF

C 3102 (A,112,74)
C 3103 (A,109,79)
C 3104 (A,110,77)
C 3105 (A,84,65) 10 uF
C 3106 (A,98,68) 10 uF

C 3107 (A,107,67) 2.2 uF
C 3108 (A,95,68) 10 uF
C 3109 (A,110,63) 10 uF
C 3110 (A,112,63) 10 uF
C 3111 (A,115,63) 10 uF

C 3201 (A,101,17)

4

Part No.

CKSSYB104K10
CKSSYB103K16
CKSSYB103K16
DCH1201
CKSRYB105K10

CKSRYB105K10
CKSRYB105K10
CKSRYB105K10
CKSSYB104K10
CKSSYB103K16

CKSSYB103K16
CKSSYB104K10
CKSQYB225K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

CCSSCH470J50
CCG1192
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSRYB474K10
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CKSSYB104K10
CKSSYB152K50
CKSSYB104K10
CKSSYB104K10

CKSSYB104K10
CCSSCH120J50
CKSSYB103K16
CCSSCH4R0C50
CCSSCH120J50

CCG1201
CKSSYB104K10
CKSSYB103K16
CKSSYB104K10
CCG1236

CKSSYB104K16
CKSSYB104K10
CKSSYB104K10
CCG1236
CCG1236

CCG1218
CCG1236
CCG1236
CCG1236
CCG1236

CKSSYB102K50

Circuit Symbol and No.

CN401 (A,20,5) Connector

Part No.

CKS5204

Circuit Symbol and No.

C 406 (A,35,18)
 C 407 (A,19,11)
 C 408 (A,22,11) 1 uF
 C 409 (A,21,10) 1 uF
 C 410 (A,23,11) 1 uF

Part No.

CKSSYB104K10
 CKSSYB104K10
 DCH1246
 DCH1246
 DCH1246

RESISTORS

A

R 401 (A,14,16)
 R 404 (A,37,18)
 R 405 (A,33,24)
 R 407 (A,34,16)

RS1/16SS0R0J
 RS1/16SS221J
 RS1/16SS101J
 RS1/16SS221J

C 411 (A,23,10) 1 uF
 C 412 (A,34,5)
 C 413 (A,33,19) 1 uF
 C 414 (A,35,5) 1 uF
 C 415 (A,36,14)

DCH1246
 CKSSYB104K10
 DCH1246
 DCH1246
 CKSSYB104K10

■

R 408 (A,38,10)
 R 409 (A,26,12)
 R 410 (A,15,16)
 R 411 (A,27,16)

RS1/16SS101J
 RS1/16SS473J
 RS1/16SS101J
 RS1/16SS105J

C 416 (A,36,6)
 C 417 (A,38,19)
 C 418 (A,16,13) 1 uF
 C 419 (A,27,15)
 C 420 (A,31,17)

CKSSYB104K10
 CKSSYB104K10
 DCH1246
 CKSSYB104K10
 CCSSCH120J50

B

R 412 (A,20,23)
 R 413 (A,29,22)
 R 414 (A,19,24)
 R 415 (A,21,23)
 R 416 (A,22,23)

RS1/16SS0R0J
 RS1/10SR101J
 RS1/16SS103J
 RS1/16SS0R0J
 RS1/16SS101J

C 421 (A,31,19)
 C 422 (A,27,18) 1 uF
 C 423 (A,15,18) 2.2 uF
 C 424 (A,15,19) 1 uF
 C 425 (A,16,21) 1 uF

CCSSCH100D50
 DCH1246
 CCG1205
 DCH1246
 DCH1246

■

R 417 (B,36,19)
 R 418 (B,35,18)
 R 420 (B,34,21)
 R 421 (B,34,20)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS101J
 RS1/16SS151J

C 426 (A,17,22) 1 uF
 C 427 (A,19,23) 1 uF
 C 428 (A,24,23) 2.2 uF
 C 429 (A,26,21) 1 uF
 C 431 (B,34,17)

DCH1246
 DCH1246
 CCG1205
 DCH1246
 CKSSYB104K10

C

R 422 (B,32,3)
 R 423 (A,10,24)
 R 424 (A,8,24)
 R 425 (A,6,24)
 R 426 (A,8,11)

RS1/16SS101J
 RS1/16SS473J
 RS1/16SS473J
 RS1/16SS473J
 RS1/16SS101J

C 432 (B,34,13)
 C 433 (B,34,11)
 C 434 (B,30,4)
 C 435 (B,28,25)
 C 436 (B,26,25)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

■

R 427 (B,24,3)
 R 428 (B,25,3)
 R 429 (B,7,24)
 R 430 (B,8,25)
 R 431 (A,27,10)

RS1/16SS101J
 RS1/16SS103J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS103J

C 437 (B,25,4)
 C 438 (B,24,25)
 C 439 (B,22,4)
 C 440 (B,21,3)
 C 441 (B,19,25)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

D

R 432 (A,5,11)
 R 433 (B,11,25)
 R 434 (A,20,10)
 R 435 (B,21,25)
 R 436 (B,16,3)

RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS103J

C 442 (B,16,4)
 C 443 (A,6,12)
 C 444 (A,10,13)
 C 445 (B,12,23)
 C 446 (B,12,21)

CKSSYB104K10
 CCSSCJ3R0C50
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

■

R 437 (A,29,10)
 R 438 (A,4,12)
 R 439 (A,8,12)
 R 441 (B,15,25)

RAB4CQ473J
 RS1/16SS473J
 RS1/16SS473J
 RS1/16SS473J

C 447 (B,12,13)
 C 448 (B,12,12)
 C 449 (B,13,10)
 C 450 (B,12,16)
 C 452 (B,9,9) 1 uF

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 DCH1246

E

R 444 (B,11,21)
 R 445 (B,12,15)
 R 446 (B,11,9)
 R 449 (B,37,21)
 R 450 (B,34,22)

RS1/16SS473J
 RS1/16SS392J
 RS1/16SS104J
 RS1/16SS473J
 RS1/16SS473J

C 453 (B,8,19)
 C 454 (B,8,15)
 C 455 (A,8,7) 1 uF
 C 456 (A,4,8) 1 uF
 C 457 (A,27,12)

CCSSCH120J50
 CCSSCH120J50
 DCH1246
 DCH1246
 CCSSCH101J50

■

R 456 (B,12,4)
 R 458 (B,12,6)

RS1/16SS101J
 RS1/16SS101J

**Unit Number : CXX6356****Unit Name : Micro SD Unit(Service)****CAPACITORS**

F

C 401 (A,13,15) 1 uF
 C 402 (A,25,9)
 C 403 (A,25,10)
 C 404 (A,14,10)
 C 405 (A,32,7)

DCH1246
 CCSSCH470J50
 CCSSCKR50C50
 CKSSYB102K50
 CKSSYB103K16

CN3701 (A,12,10) Connector
 CN3702 (B,14,21) Connector

CKS6195
 CKS6639

Part No.

A

B

C