Packing Assembly Parts List

Symbol No.	Part No.	Description
#1 101	68-08564Z25	MANUAL,OWNER'S-AO
$1 101	68-08564Z26	MANUAL,OWNER'S-GO
%1 101	68-08564Z26	MANUAL,OWNER'S-GO
&1 101	68-09359Z02	MANUAL,OWNER'S-CO
$1 102	68-08564Z27	O/M,-GO (I,G,S)
103	01E39152S01	ASSY,CONNECTOR 4P

Symbol No.	Part No.	Description
104	15E39155S01	COVER,TERMINAL-L
105	15E39156S01	COVER,TERMINAL-R
106	03E36690S01	WRENCH,2.5X2.9
107	47E35196S01	WRENCH,3X3.5
108	03E36238S01	SCR,M4X20
109	03E39167S01	SCR,M3X12(P)(BLK)

NOTE : #1 : For North American Model Only, $1 : For European Model Only, %1 : For General Model Only,
&1 : For Chinese Model Only, Others : Common.

Packing Method View

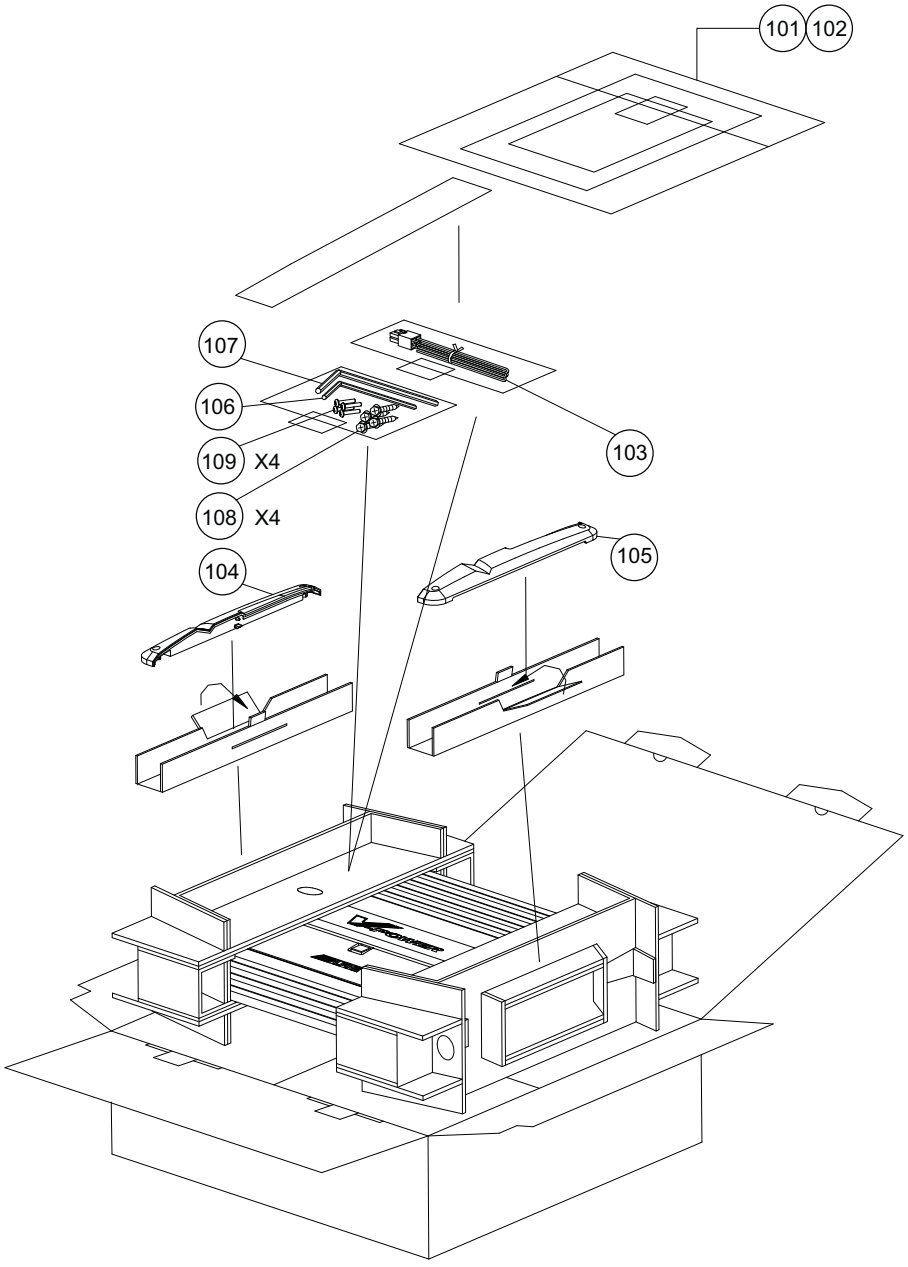

TO CONTENTS

Exploded View (Cabinet)

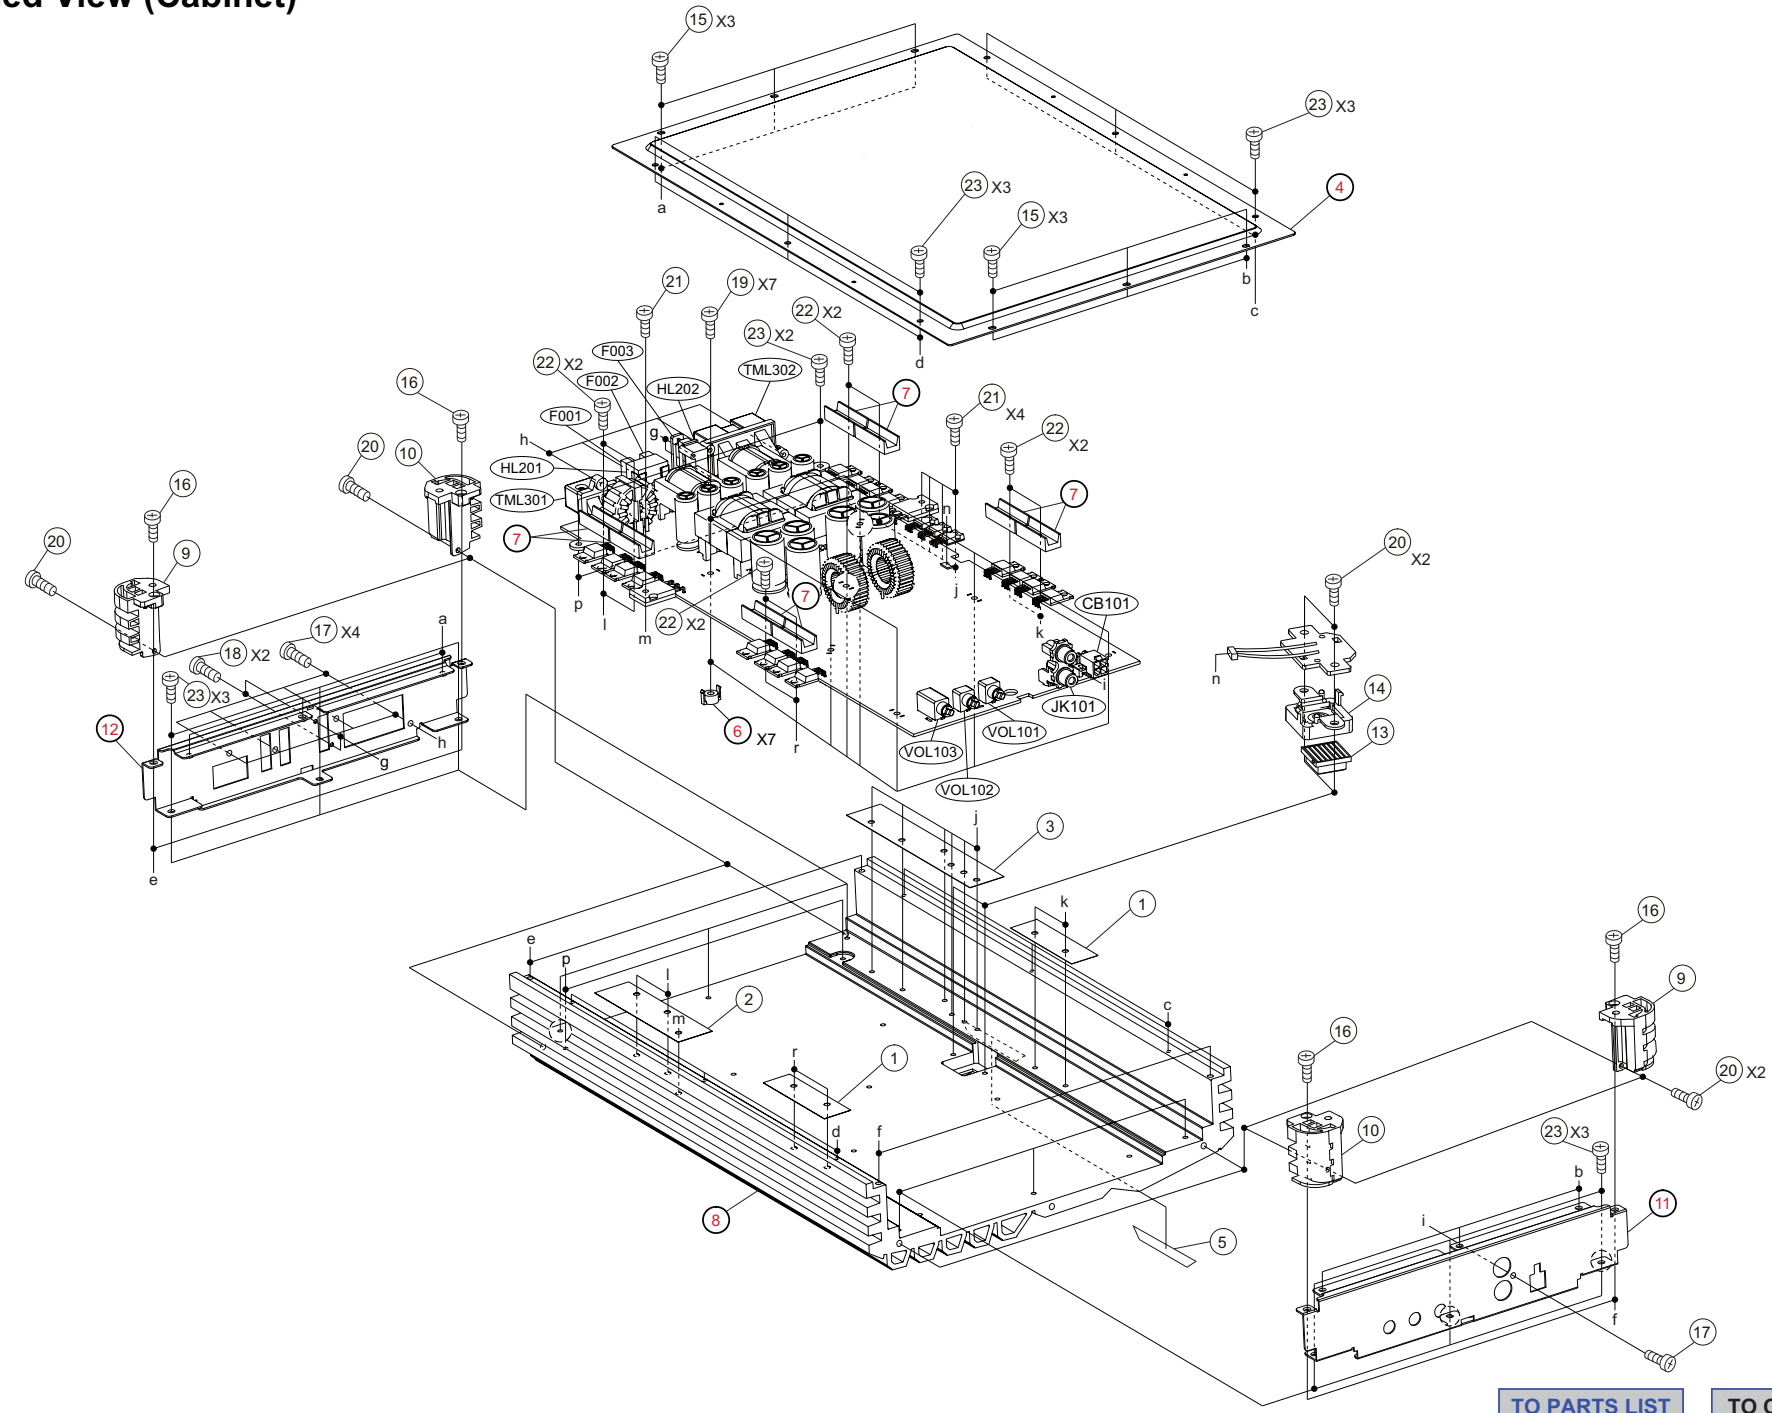

TO PARTS LIST TO CONTENTS

Electrical Parts List

* Each parts on P.W.Board are described in order of the reference number.

=======MAIN P.W.Board

C101	08E36596S01	CAP,CER. 1000pF/50V
C102	08E36596S01	CAP,CER. 1000pF/50V
C103	08E36596S01	CAP,CER. 1000pF/50V
C104	08E36596S01	CAP,CER. 1000pF/50V
C105	08E36596S01	CAP,CER. 1000pF/50V
C106	08E36596S01	CAP,CER. 1000pF/50V
C107	08E36596S01	CAP,CER. 1000pF/50V
C108	08E36596S01	CAP,CER. 1000pF/50V
C111	08E38602S01	CAP,CER. 47pF/50V
C112	08E38602S01	CAP,CER. 47pF/50V
C114	08E38602S01	CAP,CER. 47pF/50V
C115	08E38602S01	CAP,CER. 47pF/50V
C116	08E38602S01	CAP,CER. 47pF/50V
C117	08E38602S01	CAP,CER. 47pF/50V
C118	08E38621S01	CAP,FILM 0.1uF/50V
C119	08E38621S01	CAP,FILM 0.1uF/50V
C120	08E38621S01	CAP,FILM 0.1uF/50V
C121	08E38621S01	CAP,FILM 0.1uF/50V
C123	08E36675S01	CAP,CER. 33pF/50V
C125	08E38086S01	CAP,CER. 10pF/50V
C127	08E38620S01	CAP,FILM.0.022uF/50V
C129	08E38086S01	CAP,CER. 10pF/50V
C132	23E40212S01	CAP,ELY. 0.1uF/50V
C133	23E40212S01	CAP,ELY. 0.1uF/50V
C136	23E40213S01	CAP,ELY. 0.33uF/50V
C137	23E38016S01	CAP,ELY. 0.22uF/50V
C138	08E38602S01	CAP,CER. 47pF/50V
C140	08E38602S01	CAP,CER. 47pF/50V
C141	08E38602S01	CAP,CER. 47pF/50V
C142	08E38602S01	CAP,CER. 47pF/50V
C201	08E39106S01	CAP,CER.100pF/500V
C202	08E39106S01	CAP,CER.100pF/500V
C203	08E39104S01	CAP,CER.0.01uF/500V
C204	08E39104S01	CAP,CER.0.01uF/500V
C205	08E39104S01	CAP,CER.0.01uF/500V
C211	08E28771S01	CAP,CER. 0.01uF/50V
C213	08E36627S01	CAP,CER. 0.022uF/50V
C214	08E28771S01	CAP,CER. 0.01uF/50V
C215	08E28771S01	CAP,CER. 0.01uF/50V
C216	08E28771S01	CAP,CER. 0.01uF/50V
C217	08E36472S01	CAP,CER. 0.1uF/50V
C218	08E36472S01	CAP,CER. 0.1uF/50V
C219	08E36626S01	CAP,CER. 2200pF/50V
C220	08E37999S01	CAP,FILM 1200pF/50V
C221	08E36472S01	CAP,CER. 0.1uF/50V
C222	08E36472S01	CAP,CER. 0.1uF/50V
C223	08E36472S01	CAP,CER. 0.1uF/50V
C224	08E40211S01	CAP,CER. 0.47uF/50V
C225	08E40211S01	CAP,CER. 0.47uF/50V
C226	08E39186S01	CAP,CER.2200pF/500V
C227	08E39186S01	CAP,CER.2200pF/500V

C228	08E39186S01	CAP,CER.2200pF/500V
C229	08E39186S01	CAP,CER.2200pF/500V
C230	08E40211S01	CAP,CER. 0.47uF/50V
C231	08E40211S01	CAP,CER. 0.47uF/50V
C232	08E40211S01	CAP,CER. 0.47uF/50V
C233	08E40211S01	CAP,CER. 0.47uF/50V
C234	08E36472S01	CAP,CER. 0.1uF/50V
C235	08E36472S01	CAP,CER. 0.1uF/50V
C236	08E40211S01	CAP,CER. 0.47uF/50V
C237	08E28771S01	CAP,CER. 0.01uF/50V
C238	08E28771S01	CAP,CER. 0.01uF/50V
C301	08E38540S01	CAP,CER. 0.15uF/16V
C302	08E38540S01	CAP,CER. 0.15uF/16V
C303	08E36470S01	CAP,CER. 100pF/50V
C304	08E36470S01	CAP,CER. 100pF/50V
C305	08E36676S01	CAP,CER. 47pF/50V
C306	08E36676S01	CAP,CER. 47pF/50V
C307	08E39114S01	CAP,FILM 3300pF/50V
C308	08E39114S01	CAP,FILM 3300pF/50V
C309	08E39114S01	CAP,FILM 3300pF/50V
C310	08E39114S01	CAP,FILM 3300pF/50V
C311	08E36472S01	CAP,CER. 0.1uF/50V
C312	08E36472S01	CAP,CER. 0.1uF/50V
C313	08E38109S01	CAP,CER. 1200pF/50V
C314	08E38109S01	CAP,CER. 1200pF/50V
C315	08E38109S01	CAP,CER. 1200pF/50V
C316	08E38109S01	CAP,CER. 1200pF/50V
C317	08E36472S01	CAP,CER. 0.1uF/50V
C318	08E36596S01	CAP,CER. 1000pF/50V
C319	08E36596S01	CAP,CER. 1000pF/50V
C320	08E39107S01	CAP,CER.0.33uF/100V
C321	08E39107S01	CAP,CER.0.33uF/100V
C327	08E39107S01	CAP,CER.0.33uF/100V
C333	08E39107S01	CAP,CER.0.33uF/100V
C342	08E36472S01	CAP,CER. 0.1uF/50V
C343	08E36472S01	CAP,CER. 0.1uF/50V
C344	08E36472S01	CAP,CER. 0.1uF/50V
C345	08E36472S01	CAP,CER. 0.1uF/50V
C347	08E39105S01	CAP,CER.1500pF/500V
C348	08E39105S01	CAP,CER.1500pF/500V
C349	08E39115S01	CAP,METAL 1uF/100V
C350	08E39115S01	CAP,METAL 1uF/100V
C351	08E39115S01	CAP,METAL 1uF/100V
C352	08E36646S01	CAP,FILM 0.47uF/50V
C353	08E36646S01	CAP,FILM 0.47uF/50V
C356	08E39104S01	CAP,CER.0.01uF/500V
C357	08E39104S01	CAP,CER.0.01uF/500V
C360	08E40211S01	CAP,CER. 0.47uF/50V
C361	08E40211S01	CAP,CER. 0.47uF/50V
C371	08E39104S01	CAP,CER.0.01uF/500V
C372	08E39104S01	CAP,CER.0.01uF/500V
C401	08E32300S01	CAP,CER. 6800pF/50V
C402	08E28771S01	CAP,CER. 0.01uF/50V
C404	08E36472S01	CAP,CER. 0.1uF/50V
C405	08E36472S01	CAP,CER. 0.1uF/50V
C406	08E36470S01	CAP,CER. 100pF/50V
C407	08E36472S01	CAP,CER. 0.1uF/50V

C408	08E36470S01	CAP,CER. 100pF/50V
C409	08E36470S01	CAP,CER. 100pF/50V
C410	08E36472S01	CAP,CER. 0.1uF/50V
C412	08E36472S01	CAP,CER. 0.1uF/50V
C413	08E36472S01	CAP,CER. 0.1uF/50V
C414	08E36472S01	CAP,CER. 0.1uF/50V
C415	08E36472S01	CAP,CER. 0.1uF/50V
C416	08E36472S01	CAP,CER. 0.1uF/50V
C417	08E36472S01	CAP,CER. 0.1uF/50V
C418	08E36595S01	CAP,CER. 560pF/50V
C419	08E36595S01	CAP,CER. 560pF/50V
C420	08E36595S01	CAP,CER. 560pF/50V
C421	08E36595S01	CAP,CER. 560pF/50V
C422	08E28771S01	CAP,CER. 0.01uF/50V
C801	08E36472S01	CAP,CER. 0.1uF/50V
C802	08E36472S01	CAP,CER. 0.1uF/50V
C803	08E38109S01	CAP,CER. 1200pF/50V
C804	08E38109S01	CAP,CER. 1200pF/50V
C805	08E36472S01	CAP,CER. 0.1uF/50V
C807	08E40211S01	CAP,CER. 0.47uF/50V
C808	08E40211S01	CAP,CER. 0.47uF/50V
C809	08E39107S01	CAP,CER.0.33uF/100V
C810	08E39107S01	CAP,CER.0.33uF/100V
C811	08E36472S01	CAP,CER. 0.1uF/50V
CH201	09E27780S01	CONN,WTB 02P
CL401	91E39901S01	RESONATOR,7.7MHz
D201	48E39121S01	DIODE,GN1D
D203	48E39121S01	DIODE,GN1D
D204	48E39100S01	DIODE,RLS-73 90V
D205	48E39878S01	DIODE,KCF25A20
D206	48E39879S01	DIODE,C25P20FR
D301	48E10946S01	DIODE,DA204K
D302	48E10946S01	DIODE,DA204K
D303	48E39122S01	DIODE,MURS120
D304	48E39122S01	DIODE,MURS120
D305	48E39122S01	DIODE,MURS120
D306	48E39122S01	DIODE,MURS120
D307	48E39123S01	DIODE,SK2BS
D308	48E39123S01	DIODE,SK2BS
D309	48E39123S01	DIODE,SK2BS
D310	48E39123S01	DIODE,SK2BS
D401	48E39100S01	DIODE,RLS-73 90V
D801	48E39100S01	DIODE,RLS-73 90V
D802	48E36568S01	DIODE,DAN202K
D803	48E36633S01	DIODE,DAP202K
D804	48E36568S01	DIODE,DAN202K
D805	48E37927S01	DIODE,1SS355
D806	48E37927S01	DIODE,1SS355
D807	48E37927S01	DIODE,1SS355
D808	48E37927S01	DIODE,1SS355
E101	23E38011S01	CAP,ELY. 3.3uF/50V
E102	23E38011S01	CAP,ELY. 3.3uF/50V
E103	23E38011S01	CAP,ELY. 3.3uF/50V
E104	23E38011S01	CAP,ELY. 3.3uF/50V
E105	23E38000S01	CAP,ELY. 1uF/50V
E106	23E38000S01	CAP,ELY. 1uF/50V
E107	23E38001S01	CAP,ELY. 2.2uF/50V

E108	23E38000S01	CAP,ELY. 1uF/50V
E109	23E38000S01	CAP,ELY. 1uF/50V
E201	23E38103S01	CAP,ELY. 470uF/25V
E202	23E38103S01	CAP,ELY. 470uF/25V
E203	23E38017S01	CAP,ELY. 470uF/10V
E204	23E38006S01	CAP,ELY. 22uF/16V
E205	23E38020S01	CAP,ELY. 330uF/10V
E206	23E38006S01	CAP,ELY. 22uF/16V
E210	23E37984S01	CAP,ELY. 1800uF/25V
E211	23E37984S01	CAP,ELY. 1800uF/25V
E212	23E37984S01	CAP,ELY. 1800uF/25V
E213	23E37984S01	CAP,ELY. 1800uF/25V
E214	23E37984S01	CAP,ELY. 1800uF/25V
E215	23E37984S01	CAP,ELY. 1800uF/25V
E216	23E37990S01	CAP,ELY. 1800uF/50V
E217	23E37990S01	CAP,ELY. 1800uF/50V
E218	23E37990S01	CAP,ELY. 1800uF/50V
E220	23E37990S01	CAP,ELY. 1800uF/50V
E222	23E37990S01	CAP,ELY. 1800uF/50V
E223	23E37990S01	CAP,ELY. 1800uF/50V
E224	23E38000S01	CAP,ELY. 1uF/50V
E225	23E38000S01	CAP,ELY. 1uF/50V
E226	23E38018S01	CAP,ELY. 100uF/25V
E227	23E38018S01	CAP,ELY. 100uF/25V
E228	23E38014S01	CAP,ELY. 100uF/16V
E229	23E38014S01	CAP,ELY. 100uF/16V
E230	23E38103S01	CAP,ELY. 470uF/25V
E301	23E38002S01	CAP,ELY. 4.7uF/50V
E302	23E38002S01	CAP,ELY. 4.7uF/50V
E303	23E38002S01	CAP,ELY. 4.7uF/50V
E304	23E38002S01	CAP,ELY. 4.7uF/50V
E310	23E39110S01	CAP,ELY. 47uF/100V
E311	23E39110S01	CAP,ELY. 47uF/100V
E312	23E39110S01	CAP,ELY. 47uF/100V
E313	23E39110S01	CAP,ELY. 47uF/100V
E314	23E39109S01	CAP,ELY. 0.47uF/50V
E315	23E38012S01	CAP,ELY. 470uF/16V
E401	23E38006S01	CAP,ELY. 22uF/16V
E402	23E38002S01	CAP,ELY. 4.7uF/50V
E403	23E38006S01	CAP,ELY. 22uF/16V
E404	23E38006S01	CAP,ELY. 22uF/16V
E405	23E38006S01	CAP,ELY. 22uF/16V
E801	23E38100S01	CAP,ELY. 4.7uF/50V
E802	23E38019S01	CAP,ELY. 47uF/16V
IC101	51E22130S01	IC,NJM4560M
IC102	51E22130S01	IC,NJM4560M
IC103	51E22130S01	IC,NJM4560M
IC104	51E22130S01	IC,NJM4560M
IC105	51E22130S01	IC,NJM4560M
IC106	51E22130S01	IC,NJM4560M
IC107	51E22130S01	IC,NJM4560M
IC108	51E22130S01	IC,NJM4560M
IC201	51E39139S01	IC,BD5243G
IC202	51E34586S01	IC,NJM7805SP
IC203	51E38068S01	IC,NJM7809DL1A
IC204	51E39140S01	IC,uPC494GS-E1-A
IC205	51E34504S01	IC,MC33152D

IC206	51E34504S01	IC,MC33152D
IC207	51E36474S01	IC,NJM78L05UA
IC208	51E38065S01	IC,NJM79L05UA
IC301	51E40216S01	IC,NJM2137V
IC303	51E39132S01	IC,MC14069UBDR2G
IC304	51E39132S01	IC,MC14069UBDR2G
IC305	51E39133S01	IC,MC14081BDR2G
IC306	51E38058S01	IC,IR2010S
IC307	51E38058S01	IC,IR2010S
IC401	51E39138S01	IC,BD5242G
IC403	51-03700Z01	TMP86M4AUG-QFT
IC404	51E39135S01	IC,MC74VHC74DTR2G
IC405	51E39134S01	IC,MC74HC1GU04
IC406	51E39131S01	IC,KIC7SH08FU
IC407	51E39131S01	IC,KIC7SH08FU
IC408	51E39130S01	IC,LM20BIM7
IC409	51E39596S01	IC,BA2901FV
IC801	51E23843S01	IC,NJM2903M
IC802	51E38067S01	IC,KIC7S00FU
L201	24E40217S01	COIL,IND. 10uH
Q101	48E39124S01	TR,KTC2874-B
Q102	48E37248S01	TR,FMC2
Q201	48E22902S01	TR,2SC2412K
Q202	48E39125S01	TR,KTB1241
Q207	48E22902S01	TR,2SC2412K
Q208	48E39126S01	TR,KTB985
Q209	48E22092S01	TR,DTA124EKA
Q210	48E37986S01	FET,IRF3205PB
Q211	48E37986S01	FET,IRF3205PB
Q212	48E37986S01	FET,IRF3205PB
Q213	48E37986S01	FET,IRF3205PB
Q214	48E37986S01	FET,IRF3205PB
Q215	48E37986S01	FET,IRF3205PB
Q216	48E37986S01	FET,IRF3205PB
Q217	48E37986S01	FET,IRF3205PB
Q218	48E39128S01	TR,KTD600K
Q219	48E39129S01	TR,KTB631K
Q301	48E09036S01	TR,KTA1266-Y
Q302	48E09036S01	TR,KTA1266-Y
Q303	48E39128S01	TR,KTD600K
Q304	48E37190S01	TR,2SB1198K
Q305	48E37985S01	FET,IRF3415PB
Q306	48E37985S01	FET,IRF3415PB
Q307	48E37985S01	FET,IRF3415PB
Q308	48E37985S01	FET,IRF3415PB
Q309	48E37985S01	FET,IRF3415PB
Q310	48E37985S01	FET,IRF3415PB
Q311	48E37985S01	FET,IRF3415PB
Q312	48E37985S01	FET,IRF3415PB
Q401	48E36573S01	TR,DTC144EK
Q402	48E36573S01	TR,DTC144EK
Q403	48E36573S01	TR,DTC144EK
Q404	48E36573S01	TR,DTC144EK
Q801	48E22902S01	TR,2SC2412K
Q802	48E22902S01	TR,2SC2412K
Q803	48E22902S01	TR,2SC2412K
Q804	48E22902S01	TR,2SC2412K

Q805	48E36573S01	TR,DTC144EK
Q806	48E38040S01	TR,DTA144EK
Q807	48E38062S01	TR,DTA114EK
Q808	48E36573S01	TR,DTC144EK
Q809	48E22092S01	TR,DTA124EKA
Q810	48E22902S01	TR,2SC2412K
Q811	48E36572S01	TR,DTC124EKA
R101	06E40188S01	RES,CF. 330-1/16
R102	06E40188S01	RES,CF. 330-1/16
R103	06E40191S01	RES,CF. 11K-1/16
R104	06E40191S01	RES,CF. 11K-1/16
R105	06E40191S01	RES,CF. 11K-1/16
R106	06E40191S01	RES,CF. 11K-1/16
R107	06E40192S01	RES,CF. 22K-1/16
R108	06E40192S01	RES,CF. 22K-1/16
R109	06E40187S01	RES,CF. 1K-1/16
R110	06E40187S01	RES,CF. 1K-1/16
R111	06E40187S01	RES,CF. 1K-1/16
R112	06E40187S01	RES,CF. 1K-1/16
R113	06E40190S01	RES,CF. 220K-1/16
R114	06E40190S01	RES,CF. 220K-1/16
R115	06E40190S01	RES,CF. 220K-1/16
R116	06E40190S01	RES,CF. 220K-1/16
R117	06E36464S01	RES,CF. 0-1/16W
R118	06E36464S01	RES,CF. 0-1/16W
R119	06E36464S01	RES,CF. 0-1/16W
R120	06E36464S01	RES,CF. 0-1/16W
R121	06E40189S01	RES,CF. 15K-1/16
R122	06E40189S01	RES,CF. 15K-1/16
R123	06E40189S01	RES,CF. 15K-1/16
R124	06E40189S01	RES,CF. 15K-1/16
R125	06E40189S01	RES,CF. 15K-1/16
R126	06E40189S01	RES,CF. 15K-1/16
R127	06E40189S01	RES,CF. 15K-1/16
R128	06E40189S01	RES,CF. 15K-1/16
R129	06E28790S01	RES,CF. 5.6K-1/16W
R130	06E28790S01	RES,CF. 5.6K-1/16W
R132	06E31162S01	RES,CF. 180K-1/16W
R133	06E31162S01	RES,CF. 180K-1/16W
R134	06E31805S01	RES,CF. 75K-1/16W
R135	06E31805S01	RES,CF. 75K-1/16W
R136	06E31152S01	RES,CF. 1.5K-1/16W
R137	06E32033S01	RES,CF. 910-1/16W
R138	06E31683S01	RES,CF. 150K-1/16W
R139	06E37246S01	RES,CF. 27K-1/16W
R140	06E31156S01	RES,CF. 5.1K-1/16W
R141	06E31156S01	RES,CF. 5.1K-1/16W
R142	06E36616S01	RES,CF. 100-1/16W
R143	06E31152S01	RES,CF. 1.5K-1/16W
R144	06E31156S01	RES,CF. 5.1K-1/16W
R145	06E37246S01	RES,CF. 27K-1/16W
R146	06E38585S01	RES,CF. 3.6K-1/16W
R147	06E38585S01	RES,CF. 3.6K-1/16W
R148	06E38585S01	RES,CF. 3.6K-1/16W
R149	06E38585S01	RES,CF. 3.6K-1/16W
R150	06E28790S01	RES,CF. 5.6K-1/16W
R151	06E36659S01	RES,CF. 15K-1/16W

R153	06E36659S01	RES,CF. 15K-1/16W
R154	06E36659S01	RES,CF. 15K-1/16W
R155	06E36620S01	RES,CF. 3.3K-1/16W
R156	06E36463S01	RES,CF. 10K-1/16W
R201	06E36588S01	RES,CF. 30K-1/16W
R202	06E36581S01	RES,CF. 30K-1/4W
R203	06E36559S01	RES,CF. 47K-1/16W
R204	06E26239S01	RES,CF. 10K-1/4W
R212	06E38582S01	RES,CF. 2.4K-1/4W
R213	06E38582S01	RES,CF. 2.4K-1/4W
R214	06E36462S01	RES,CF. 4.7K-1/16W
R215	06E40202S01	RES,CF. 39K-1/8W
R216	06E40203S01	RES,CF. 56K-1/8W
R217	06E36462S01	RES,CF. 4.7K-1/16W
R218	06E36463S01	RES,CF. 10K-1/16W
R219	06E40199S01	RES,CF. 30K-1/8W
R220	06E40195S01	RES,CF. 10K-1/8W
R221	06E36582S01	RES,CF. 47K-1/4W
R222	06E36580S01	RES,CF. 2.2K-1/4W
R223	06E36580S01	RES,CF. 2.2K-1/4W
R224	06E36580S01	RES,CF. 2.2K-1/4W
R225	06E36580S01	RES,CF. 2.2K-1/4W
R226	06E36463S01	RES,CF. 10K-1/16W
R227	06E36463S01	RES,CF. 10K-1/16W
R228	06E36462S01	RES,CF. 4.7K-1/16W
R229	06E36584S01	RES,CF. 820-1/16W
R230	06E31153S01	RES,CF. 2.2K-1/16W
R231	06E40198S01	RES,CF. 27K-1/8W
R232	06E40207S01	RES,CF. 2K-1/8W
R233	06E40206S01	RES,CF. 1.6K-1/8W
R234	06E40198S01	RES,CF. 27K-1/8W
R235	06E36586S01	RES,CF. 22K-1/16W
R236	06E32037S01	RES,CF. 120K-1/16W
R238	06E28793S01	RES,CF. 18K-1/16W
R239	06E36618S01	RES,CF. 1K-1/16W
R240	06E36618S01	RES,CF. 1K-1/16W
R241	06E36578S01	RES,CF. 10-1/4W
R242	06E36578S01	RES,CF. 10-1/4W
R243	06E36578S01	RES,CF. 10-1/4W
R244	06E36578S01	RES,CF. 10-1/4W
R245	06E36578S01	RES,CF. 10-1/4W
R246	06E36578S01	RES,CF. 10-1/4W
R247	06E36578S01	RES,CF. 10-1/4W
R248	06E36578S01	RES,CF. 10-1/4W
R249	06E36555S01	RES,CF. 33-1/4W
R250	06E36555S01	RES,CF. 33-1/4W
R251	06E36555S01	RES,CF. 33-1/4W
R252	06E36555S01	RES,CF. 33-1/4W
R253	06E36555S01	RES,CF. 33-1/4W
R254	06E36555S01	RES,CF. 33-1/4W
R255	06E36555S01	RES,CF. 33-1/4W
R256	06E36555S01	RES,CF. 33-1/4W
R257	06E40186S01	RES,CF. 7.5K-1/4W
R258	06E40186S01	RES,CF. 7.5K-1/4W
R259	06E32317S01	RES,CF. 750K-1/16W
R260	06E32317S01	RES,CF. 750K-1/16W
R301	06E36618S01	RES,CF. 1K-1/16W

R302	06E36618S01	RES,CF. 1K-1/16W
R303	06E33865S01	RES,CF. 6.2K-1/16W
R304	06E33865S01	RES,CF. 6.2K-1/16W
R305	06E36655S01	RES,CF. 47K-1/4W
R306	06E36655S01	RES,CF. 47K-1/4W
R307	06E38034S01	RES,CF. 1K-1/4W
R308	06E38034S01	RES,CF. 1K-1/4W
R309	06E40193S01	RES,CF. 1K-1/8W
R310	06E40193S01	RES,CF. 1K-1/8W
R311	06E40193S01	RES,CF. 1K-1/8W
R312	06E40193S01	RES,CF. 1K-1/8W
R313	06E38035S01	RES,CF. 10K-1/4W
R314	06E38035S01	RES,CF. 10K-1/4W
R315	06E38035S01	RES,CF. 10K-1/4W
R316	06E38035S01	RES,CF. 10K-1/4W
R317	06E36618S01	RES,CF. 1K-1/16W
R318	06E36618S01	RES,CF. 1K-1/16W
R319	06E36618S01	RES,CF. 1K-1/16W
R320	06E36618S01	RES,CF. 1K-1/16W
R321	06E36464S01	RES,CF. 0-1/16W
R322	06E36464S01	RES,CF. 0-1/16W
R323	06E36464S01	RES,CF. 0-1/16W
R324	06E36464S01	RES,CF. 0-1/16W
R325	06E20544S01	RES,CF. 30-1/4W
R326	06E20544S01	RES,CF. 30-1/4W
R327	06E20544S01	RES,CF. 30-1/4W
R328	06E20544S01	RES,CF. 30-1/4W
R329	06E20544S01	RES,CF. 30-1/4W
R330	06E20544S01	RES,CF. 30-1/4W
R331	06E20544S01	RES,CF. 30-1/4W
R332	06E20544S01	RES,CF. 30-1/4W
R333	06E20544S01	RES,CF. 30-1/4W
R334	06E20544S01	RES,CF. 30-1/4W
R335	06E20544S01	RES,CF. 30-1/4W
R336	06E20544S01	RES,CF. 30-1/4W
R337	06E35440S01	RES,CF. 6.8-1/4W
R338	06E35440S01	RES,CF. 6.8-1/4W
R339	06E35440S01	RES,CF. 6.8-1/4W
R340	06E35440S01	RES,CF. 6.8-1/4W
R341	06E35440S01	RES,CF. 6.8-1/4W
R342	06E35440S01	RES,CF. 6.8-1/4W
R343	06E40210S01	RES,CEMENT 0.01
R344	06E40210S01	RES,CEMENT 0.01
R345	06E40210S01	RES,CEMENT 0.01
R346	06E40210S01	RES,CEMENT 0.01
R347	06E40208S01	RES,MO. 27-3W
R348	06E40208S01	RES,MO. 27-3W
R349	06E40209S01	RES,MO. 10-3W
R350	06E40209S01	RES,MO. 10-3W
R351	06E26239S01	RES,CF. 10K-1/4W
R352	06E26239S01	RES,CF. 10K-1/4W
R353	06E31156S01	RES,CF. 5.1K-1/16W
R354	06E31152S01	RES,CF. 1.5K-1/16W
R355	06E36558S01	RES,CF. 2K-1/16W
R401	06E36463S01	RES,CF. 10K-1/16W
R406	06E36463S01	RES,CF. 10K-1/16W
R407	06E36463S01	RES,CF. 10K-1/16W

R408	06E36559S01	RES,CF. 47K-1/16W
R409	06E36559S01	RES,CF. 47K-1/16W
R410	06E36559S01	RES,CF. 47K-1/16W
R411	06E36559S01	RES,CF. 47K-1/16W
R412	06E36463S01	RES,CF. 10K-1/16W
R414	06E36463S01	RES,CF. 10K-1/16W
R415	06E36463S01	RES,CF. 10K-1/16W
R417	06E36616S01	RES,CF. 100-1/16W
R418	06E36618S01	RES,CF. 1K-1/16W
R419	06E36616S01	RES,CF. 100-1/16W
R420	06E36464S01	RES,CF. 0-1/16W
R421	06E36463S01	RES,CF. 10K-1/16W
R422	06E36622S01	RES,CF. 100K-1/16W
R423	06E36559S01	RES,CF. 47K-1/16W
R424	06E36622S01	RES,CF. 100K-1/16W
R425	06E36657S01	RES,CF. 470-1/16W
R426	06E36463S01	RES,CF. 10K-1/16W
R427	06E36616S01	RES,CF. 100-1/16W
R428	06E40201S01	RES,CF. 820-1/8W
R429	06E40200S01	RES,CF. 47-1/8W
R430	06E40197S01	RES,CF. 22K-1/8W
R431	06E40197S01	RES,CF. 22K-1/8W
R432	06E40197S01	RES,CF. 22K-1/8W
R433	06E40196S01	RES,CF. 18K-1/8W
R434	06E40204S01	RES,CF. 150K-1/8W
R435	06E40204S01	RES,CF. 150K-1/8W
R436	06E40194S01	RES,CF. 2.2K-1/8W
R437	06E40194S01	RES,CF. 2.2K-1/8W
R438	06E40201S01	RES,CF. 820-1/8W
R439	06E40200S01	RES,CF. 47-1/8W
R440	06E40197S01	RES,CF. 22K-1/8W
R441	06E40197S01	RES,CF. 22K-1/8W
R442	06E40197S01	RES,CF. 22K-1/8W
R443	06E40196S01	RES,CF. 18K-1/8W
R444	06E40204S01	RES,CF. 150K-1/8W
R445	06E40204S01	RES,CF. 150K-1/8W
R446	06E40194S01	RES,CF. 2.2K-1/8W
R447	06E40194S01	RES,CF. 2.2K-1/8W
R449	06E36616S01	RES,CF. 100-1/16W
R450	06E36616S01	RES,CF. 100-1/16W
R801	06E36463S01	RES,CF. 10K-1/16W
R802	06E36463S01	RES,CF. 10K-1/16W
R803	06E36656S01	RES,CF. 390-1/16W
R804	06E36656S01	RES,CF. 390-1/16W
R805	06E36586S01	RES,CF. 22K-1/16W
R806	06E36559S01	RES,CF. 47K-1/16W
R807	06E36463S01	RES,CF. 10K-1/16W
R808	06E36463S01	RES,CF. 10K-1/16W
R809	06E36586S01	RES,CF. 22K-1/16W
R810	06E36586S01	RES,CF. 22K-1/16W
R811	06E36559S01	RES,CF. 47K-1/16W
R812	06E36463S01	RES,CF. 10K-1/16W
R813	06E36463S01	RES,CF. 10K-1/16W
R814	06E40194S01	RES,CF. 2.2K-1/8W
R815	06E40194S01	RES,CF. 2.2K-1/8W
R816	06E36463S01	RES,CF. 10K-1/16W
R817	06E40205S01	RES,CF. 120K-1/8W

R818	06E40205S01	RES,CF. 120K-1/8W
R819	06E36559S01	RES,CF. 47K-1/16W
R820	06E36586S01	RES,CF. 22K-1/16W
R821	06E36464S01	RES,CF. 0-1/16W
R822	06E36464S01	RES,CF. 0-1/16W
R823	06E36464S01	RES,CF. 0-1/16W
R824	06E36559S01	RES,CF. 47K-1/16W
R825	06E36463S01	RES,CF. 10K-1/16W
R826	06E36559S01	RES,CF. 47K-1/16W
R827	06E36559S01	RES,CF. 47K-1/16W
R828	06E36663S01	RES,CF. 56K-1/16W
R829	06E36463S01	RES,CF. 10K-1/16W
R830	06E36463S01	RES,CF. 10K-1/16W
R831	06E36464S01	RES,CF. 0-1/16W
RA401	06E39855S01	RES,ARRAY. 10K-1/16W
RA402	06E39855S01	RES,ARRAY. 10K-1/16W
RA403	06E39855S01	RES,ARRAY. 10K-1/16W
RA404	06E39855S01	RES,ARRAY. 10K-1/16W
T201	24E40218S01	COIL,CHOKE 14.4
T202	24E40218S01	COIL,CHOKE 14.4
T203	25E40219S01	TRANS,POWER
T204	25E40219S01	TRANS,POWER
T301	24E39142S01	COIL,CHOKE 15uH
T302	24E39142S01	COIL,CHOKE 15uH
TH201	48E39141S01	THERMISTOR,22K
TH202	48E39141S01	THERMISTOR,22K
TH801	48T75382Y01	TMT,PRF18AS471OS2-CP
TH802	48T75382Y01	TMT,PRF18AS471OS2-CP
Z201	91E40215S01	FIL,EMI BK1608HM102
Z202	91E40214S01	FIL,EMI BK2125HS601
Z203	91E40214S01	FIL,EMI BK2125HS601
Z801	91E40215S01	FIL,EMI BK1608HM102
Z802	91E40215S01	FIL,EMI BK1608HM102
Z803	91E40215S01	FIL,EMI BK1608HM102
Z804	91E40215S01	FIL,EMI BK1608HM102
ZD201	48E39101S01	DIODE,ZENER HZK6A1L
ZD203	48E39118S01	DIODE,ZENER HZK15-2L
ZD204	48E38024S01	DIODE,ZENER HZS5BLL
ZD205	48E39119S01	DIODE,ZENER HZK16-1L
ZD206	48E39119S01	DIODE,ZENER HZK16-1L
ZD301	48E39120S01	DIODE,ZENER HZK12A2L
ZD801	48E39117S01	DIODE,ZENER HZK9C1L
ZD802	48E39117S01	DIODE,ZENER HZK9C1L
ZD803	48E38024S01	DIODE,ZENER HZS5BLL

=======LED P.W.Board

C930	08E36596S01	CAP,CER. 1000pF/50V
CON001	01E39153S01	ASSY,CONNECTOR 2P
LD901	48E39343S01	LED,BLU UB1106W

======= Miscellaneous

CB101	09E39151S01	CONN,WAFER 4P
F001	65E27881S01	FUSE,25A
F002	65E27881S01	FUSE,25A
F003	65E27881S01	FUSE,25A
HL201	09E39445S01	HOLDER,FUSE
HL202	09E39154S01	HOLDER,FUSE

JK101	09E39150S01	CONN,RCA 2P
TML301	09E40223S01	CONN,TERMINAL 2P
TML302	09E40224S01	CONN,WB 3P
VOL101	18E40222S01	VR,50K
VOL102	18E40221S01	VR,5K
VOL103	18E40220S01	VR,15K

Cabinet Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

1	14E37978S01	INSULATOR,SILPAD-2H
2	14E40225S01	INS,SILPAD(3H-R)
3	14E40226S01	INS,SILPAD(3H-L)
4	- - - - - - - - - - -	COVER;BOTTOM
5	33E39157S01	PLATE,NAME
6	- - - - - - - - - - -	SUPPORT;PWB
7	- - - - - - - - - - -	HEAT;SINK BAR
8	- - - - - - - - - - -	HEAT;SINK-MAIN
9	29E39158S01	LEG,MTG A
10	29E39159S01	LEG,MTG B
11	- - - - - - - - - - -	CHAS;REAR
12	- - - - - - - - - - -	CHAS;FRONT
13	34E39161S01	INDICATOR,LENS
14	09E39162S01	HOLDER,INDICATOR
15	03E39163S01	SCR,M3X6(B)(WHT)
16	03E38668S01	SCR,M3X10(B)(BLK)
17	03E38698S01	SCR,M3X8(P)(BLK)
18	03E39164S01	SCR,M2X6(P)(BLK)
19	03E39165S01	SCR,M3X11(WP)(WHT)
20	03E39166S01	SCR,M3X8(B)
21	03E37973S01	SCR,M3X12(WS)
22	03E38094S01	SCR,M3X15.5(WS)
23	03E38671S01	SCR,M3X6(B)