Packing Assembly Parts List

Symbol No.	Part No.	Description
101-1	75T58346F16	PAD,MAGIC TAPE
101-2	03S63857F59	SCR,TPG M4X15
101-3	03S60828Y03	SCR,TPG 4X14 ZN A
101-4	03A31982Y01	SCR,M4X5 FLAT A
101-5	03B44963F07	SCR,MCH M4X6 A
$1 101-6	36A11113W01	CAP,RUBBER(A)
%1 101-6	36A11113W01	CAP,RUBBER(A)
&1 101-6	36A11113W01	CAP,RUBBER(A)
$1 101-7	03A60836Y01	SCR,CUS 5X7 ZN A
%1 101-7	03A60836Y01	SCR,CUS 5X7 ZN A
&1 101-7	03A60836Y01	SCR,CUS 5X7 ZN A
101-8	03S60820Y15	SCR,MCH 4X8 ZN A
#1 101-9	60S70585F01	BAT,LIT.3V (CR2025)
101-10	14S70565Y64	INS,CVR 13X2.4XT1.0
102	07T75070W01	BKT,STOPPER ASSY
103	01T15832W08	ASSY,RCA-RCA 2M
#1 104	01T55473Y08	ASSY,WIRE AMP D100A
$1 104	01T55473Y09	ASSY,WIRE AMP D100R
%1 104	01T55473Y09	ASSY,WIRE AMP D100R
&1 104	01T55473Y09	ASSY,WIRE AMP D100R

Symbol No.	Part No.	Description
#1 105	09-06827Z01	ASSY,ATFC-0496-01A
$1 105	09-06827Z03	ASSY,ATFC-0496-03A
%1 105	09-06827Z03	ASSY,ATFC-0496-03A
&1 105	09-06827Z03	ASSY,ATFC-0496-03A
106	33C70776Y01	FACE,PLATE D300
107	15D61379Y01	CASE,INNER
108	15B41543Y01	CARRING,BAG
#1 109	97-02173Z01	ASSY,SBNN00003A
#1 110	68-05946Z49	O/M AOAM AODL
$1 110	68-05946Z51	O/M AAO AODL
%1 110	68-05946Z51	O/M AAO AODL
&1 110	68-05946Z54	O/M AOCH AODL

NOTE : #1 : For North American Model Only,
$1 : For General Foreign (Region3) Model Only,
%1 : For General Foreign (Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

Packing Method View

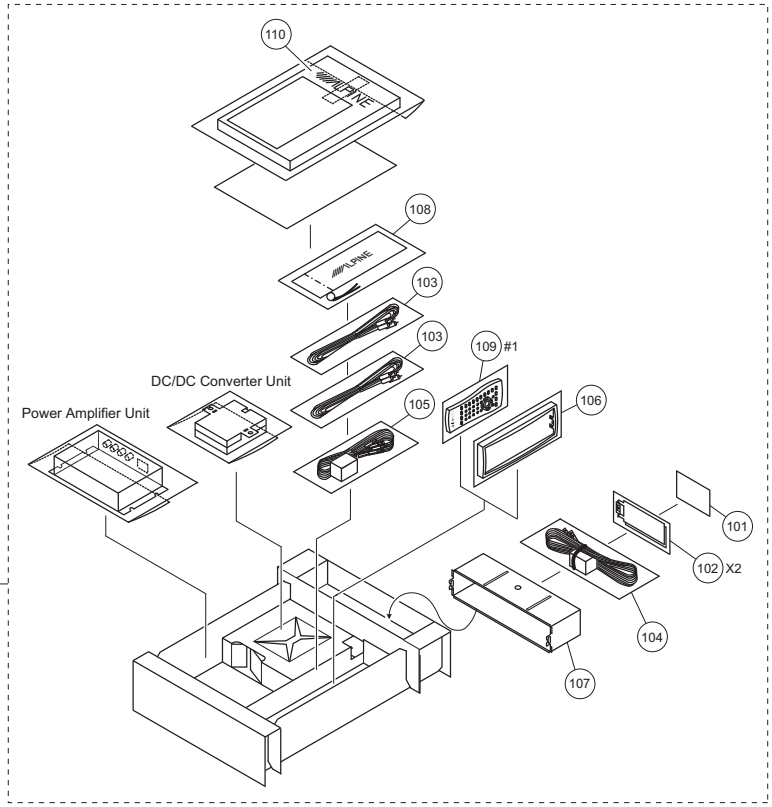

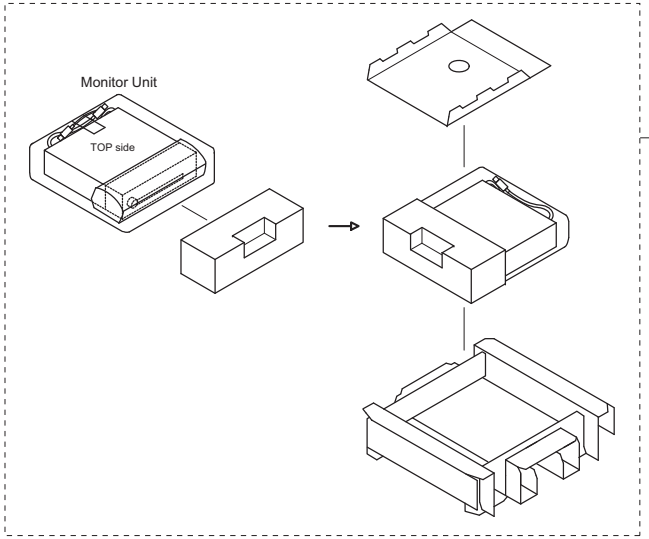

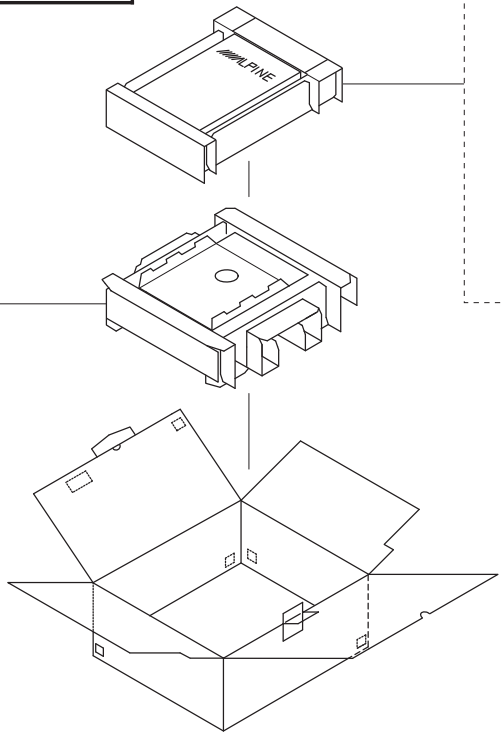

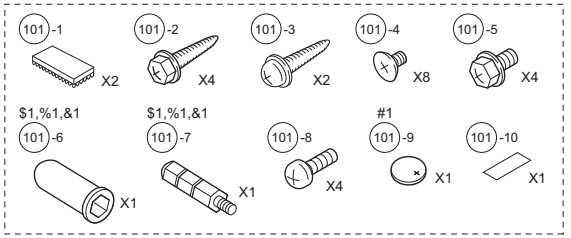

TO CONTENTS

System Connections

(North American Model Only)

Connections

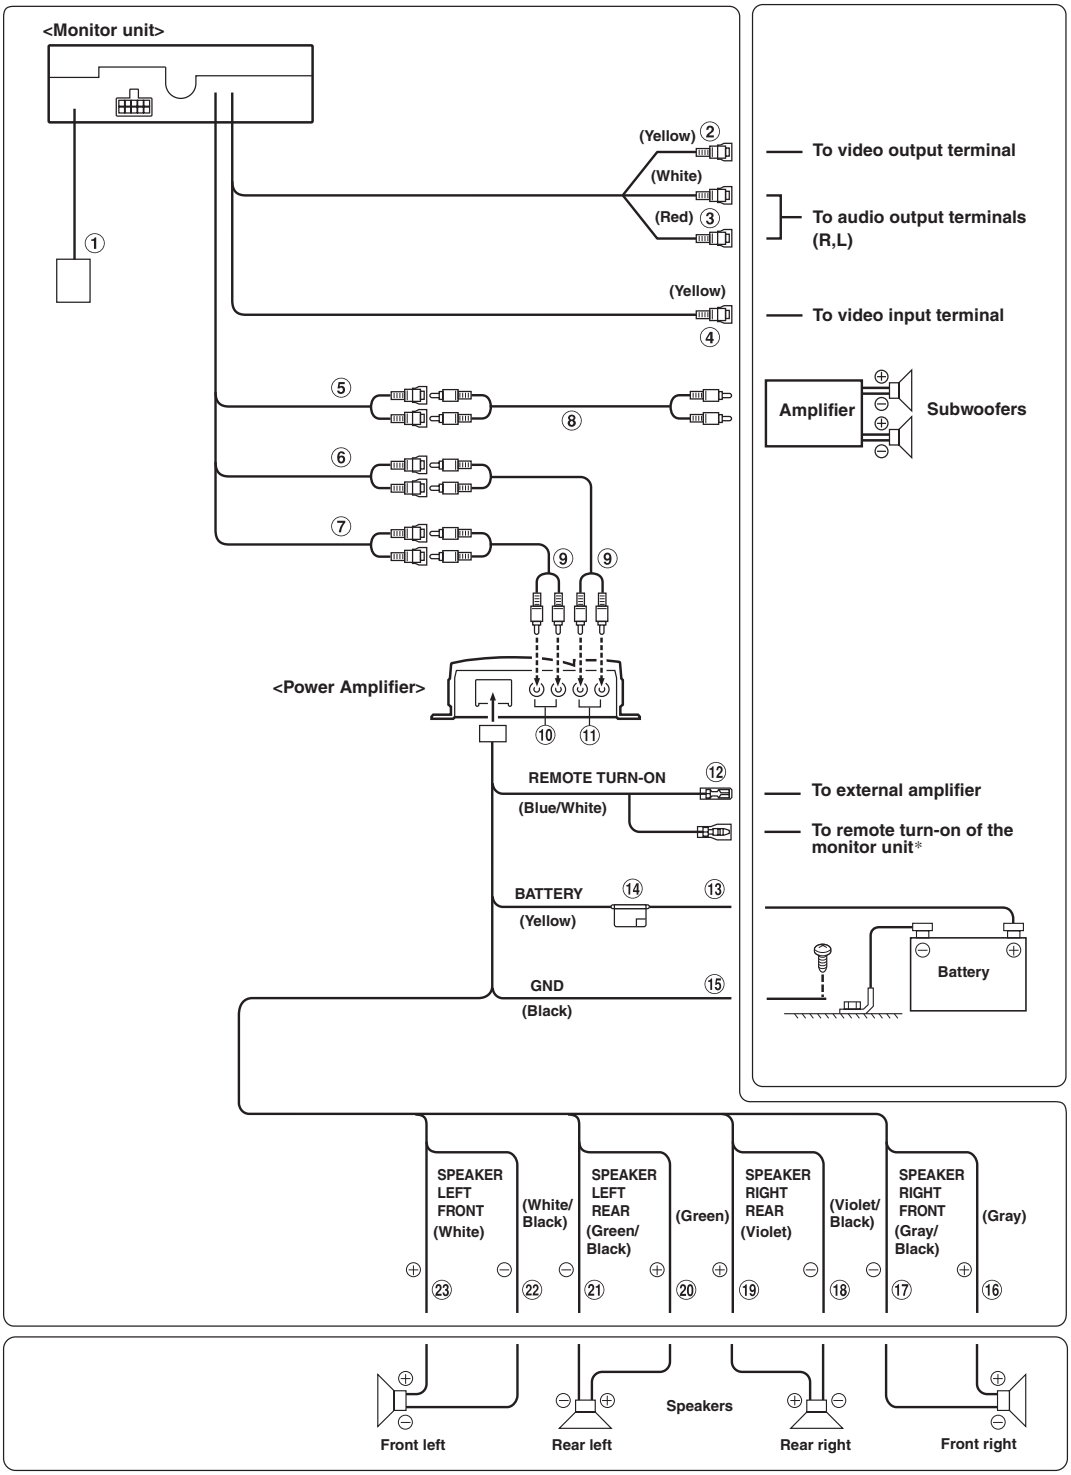

* *Do not connect the power supply cable when the ignition is turned on or set to Accessory.*

TO CONTENTS

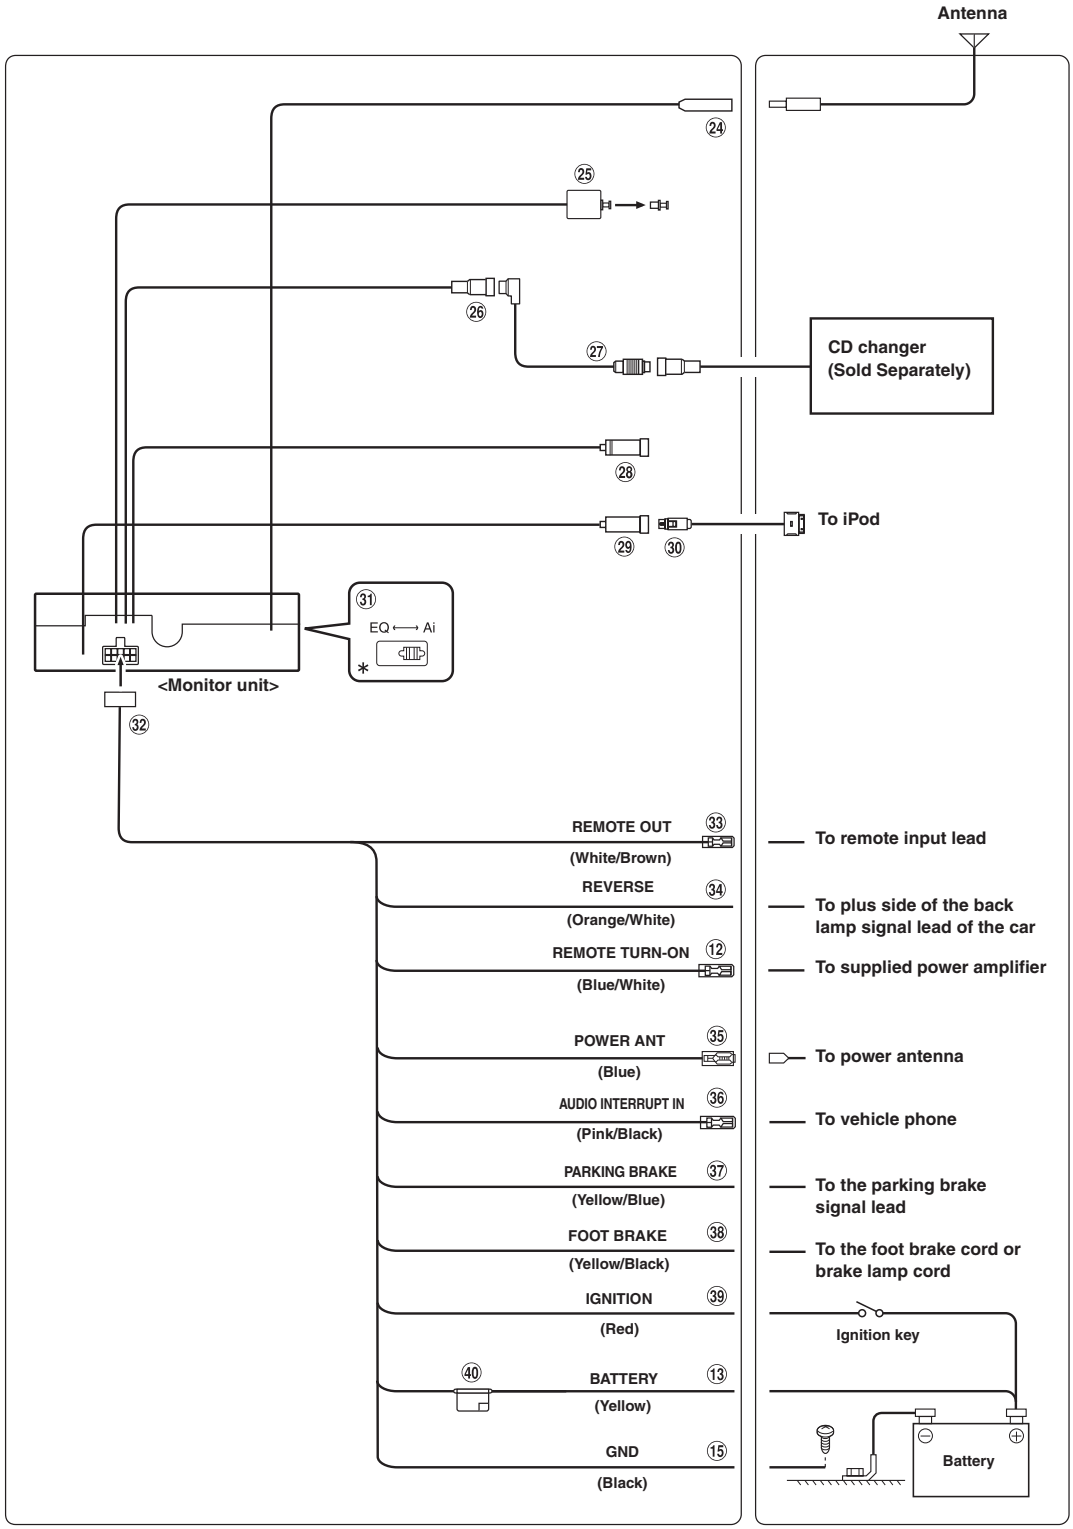

• *Set the system switch to "Ai" when only a changer is connected (when the Ai-NET compatible equalizer is not used).*

* *The label is attached on the bottom of the unit.*

TO CONTENTS

① **DC/DC Converter**
- *Do not install the converter at a location subjected to water such as under the floor mat or air conditioner. This may cause a malfunction.*
- *Do not bundle the DC/DC converter cable with other audio cables. Also, do not install the cables directly next to the unit. Doing so may induce noise into your system.*
- *Keep the DC/DC converter away from the Antenna cables and the rear side of the unit, otherwise noise may be generated when receiving radio broadcast.*

② **Video Input Connector (AUX INPUT) (Yellow)**
Input the video.

③ **Audio Input Connectors (AUX INPUT)**
RED is right and WHITE is left input the audio.

④ **Video Output Connector (Yellow)**
Output the video.

⑤ **Subwoofer RCA Connectors**
Connect the input lead of an amplifier for the subwoofer to this terminal.

⑥ **Front Output RCA Connectors**
RED is right and WHITE is left.

⑦ **Rear Output RCA Connectors**
RED is right and WHITE is left.

⑧ **RCA Extension Cable (sold separately)**

⑨ **RCA Extension Cable (Included)**

⑩ **Rear Input Terminals**

⑪ **Front Input Terminals**

⑫ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

⑬ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.

⑭ **Fuse Holder (15A)**

⑮ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑯ **Right Front (+) Speaker Output Lead (Gray)**

⑰ **Right Front (–) Speaker Output Lead (Gray/Black)**

⑱ **Right Rear (–) Speaker Output Lead (Violet/Black)**

⑲ **Right Rear (+) Speaker Output Lead (Violet)**

⑳ **Left Rear (+) Speaker Output Lead (Green)**

㉑ **Left Rear (–) Speaker Output Lead (Green/Black)**

㉒ **Left Front (–) Speaker Output Lead (White/Black)**

㉓ **Left Front (+) Speaker Output Lead (White)**

㉔ **Antenna Receptacle**

㉕ **Digital Output Terminal (Optical)**
Use when combining fiber digital input compatible products.

㉖ **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio™ TUNER MODULE, etc.) equipped with Ai-NET.

- *Interface adapter (KCA-420i) is not recommended for use with this product.*
- *You can input TV/video sound by connecting an optional Ai-NET/ RCA Interface cable (KCA-121B) to this component.*

㉗ **Ai-NET Cable (Included with CD Changer)**

㉘ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

㉙ **iPod Direct Connector**
Control iPod signals.
Connect this to an iPod, using the (sold separately) FULL SPEED™ Connection Cable (KCE-422i).

㉚ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**

㉛ **System Switch**
When connecting a processor or divider using Ai-NET, place this switch in the EQ position. When no device is connected, leave the switch in the Ai position.

- *Be sure to turn the power off to the unit before changing the switch position.*

㉜ **Power Supply Connector**

㉝ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

㉞ **Reverse Lead (Orange/White)**
Use only when a back-up camera is connected. Connect to the plus side of the car's reverse lamp that lights when the transmission is shifted into reverse (R).
Switches the video picture to the back-up camera. This is linked with putting the car into reverse (R).

㉟ **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.

㊱ **Audio Interrupt In Lead (Pink/Black)**

㊲ **Parking Brake Lead (Yellow/Blue)**
Connect this lead to the power supply side of the parking brake switch to transmit the parking brake status signals to the IVA-D100.

㊳ **Foot Brake Lead (Yellow/Black)**
Connect to the vehicle's foot brake lead or brake lamp lead.

㊴ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.

㊵ **Fuse Holder (7.5A)**

TO CONTENTS

System Example

Connect the Ai-NET compatible audio processor (Fiber digital compatible), Navigation system, DVD player and changer.

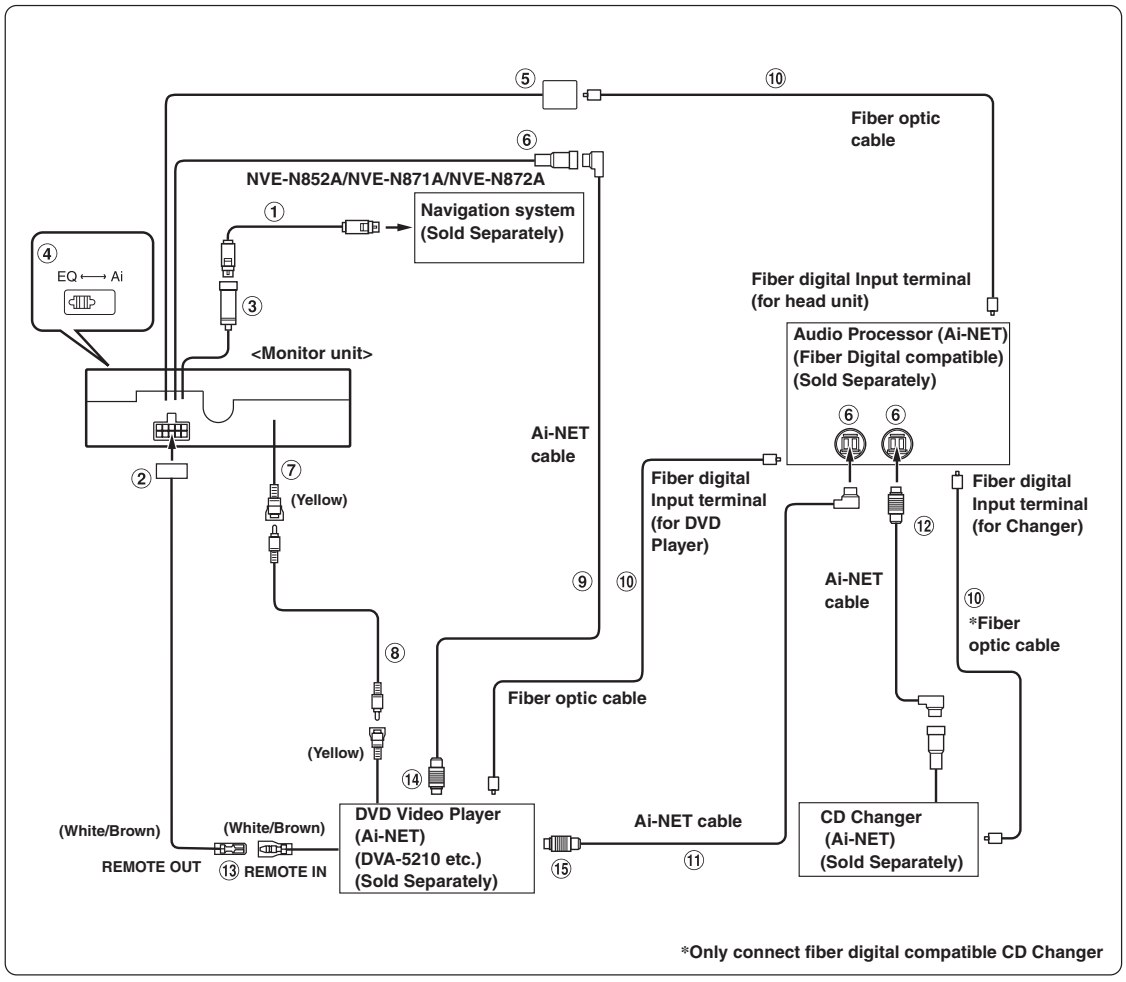

- *When the fiber optic compatible product is connected, it is necessary to set the mode of this unit.*
- *When the NVA-N751AS is connected for the Navigation System, use the RGB conversion cable KWE-503N (Sold separately).*

Please observe the following when using Fiber Optic Cable.

- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*

TO CONTENTS

① **RGB Cable (Included with NVE-N852A/NVE-N872A, not included with NVE-N871A)**

② **Power Supply Connector**

③ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

④ **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ position. When no device is connected, leave the switch in the Ai position.
- *Be sure to turn the power off to the unit before changing the switch position.*

⑤ **Digital Output Terminal**

⑥ **Ai-NET Connector**
Connect this to the output or input connector of other product equipped with Ai-NET.

⑦ **AUX Video Input Connector (AUX INPUT)**
Connect the video output lead of a DVD video player or DVD changer to this terminal.

⑧ **RCA Extension Cable (Included with DVD video player)**

⑨ **Ai-NET Cable (Included with DVD video player)**

⑩ **Fiber optic Cable (Sold Separately)**

⑪ **Ai-NET Cable (Included with Audio Processor)**

⑫ **Ai-NET Cable (Included with CD Changer)**

⑬ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑭ **To Ai-NET Connector (Gray)**

⑮ **To Ai-NET Connector (Black)**

TO CONTENTS

When Connecting External Equipment

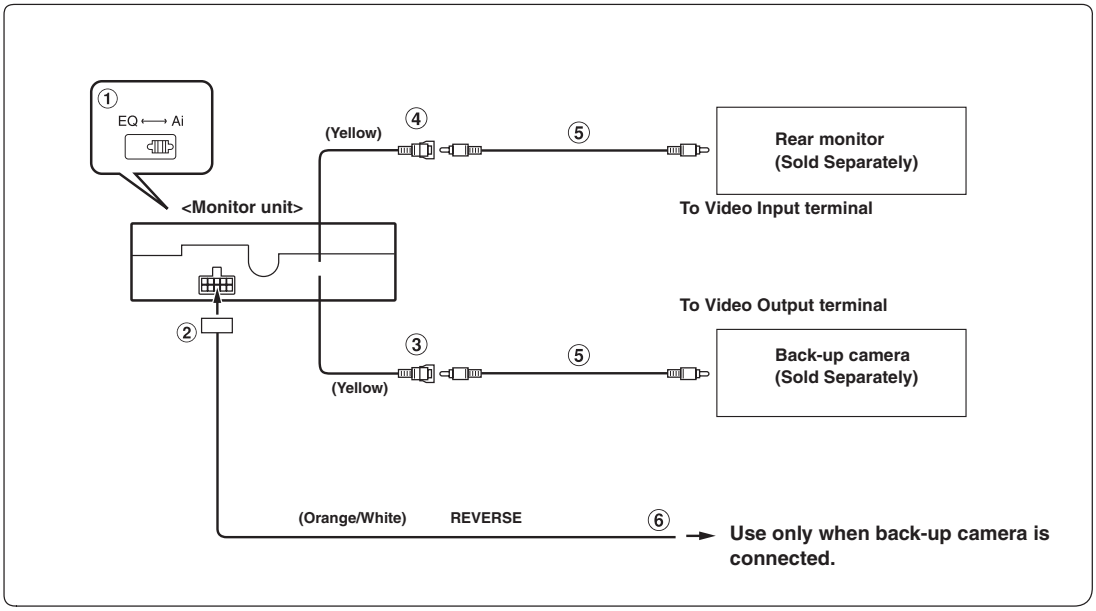

① **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ position. When no device is connected, leave the switch in the Ai position.
- *Be sure to turn the power off to the unit before changing the switch position.*

② **Power Supply Connector**

③ **AUX Video Input Connector (AUX INPUT)**
Use when connecting a back-up camera.

④ **AUX Video Output Connector**
Use when connecting an optional monitor, etc.

⑤ **RCA Extension Cable (Sold separately)**

⑥ **Reverse Lead (Orange/White)**
Connect to the plus side of the car's reverse lamp which lights when the transmission is shifted into reverse (R). Switches the video picture to the back-up camera. This is linked to putting the car into reverse (R).

TO CONTENTS

(General Foreign Model Only)

Connections

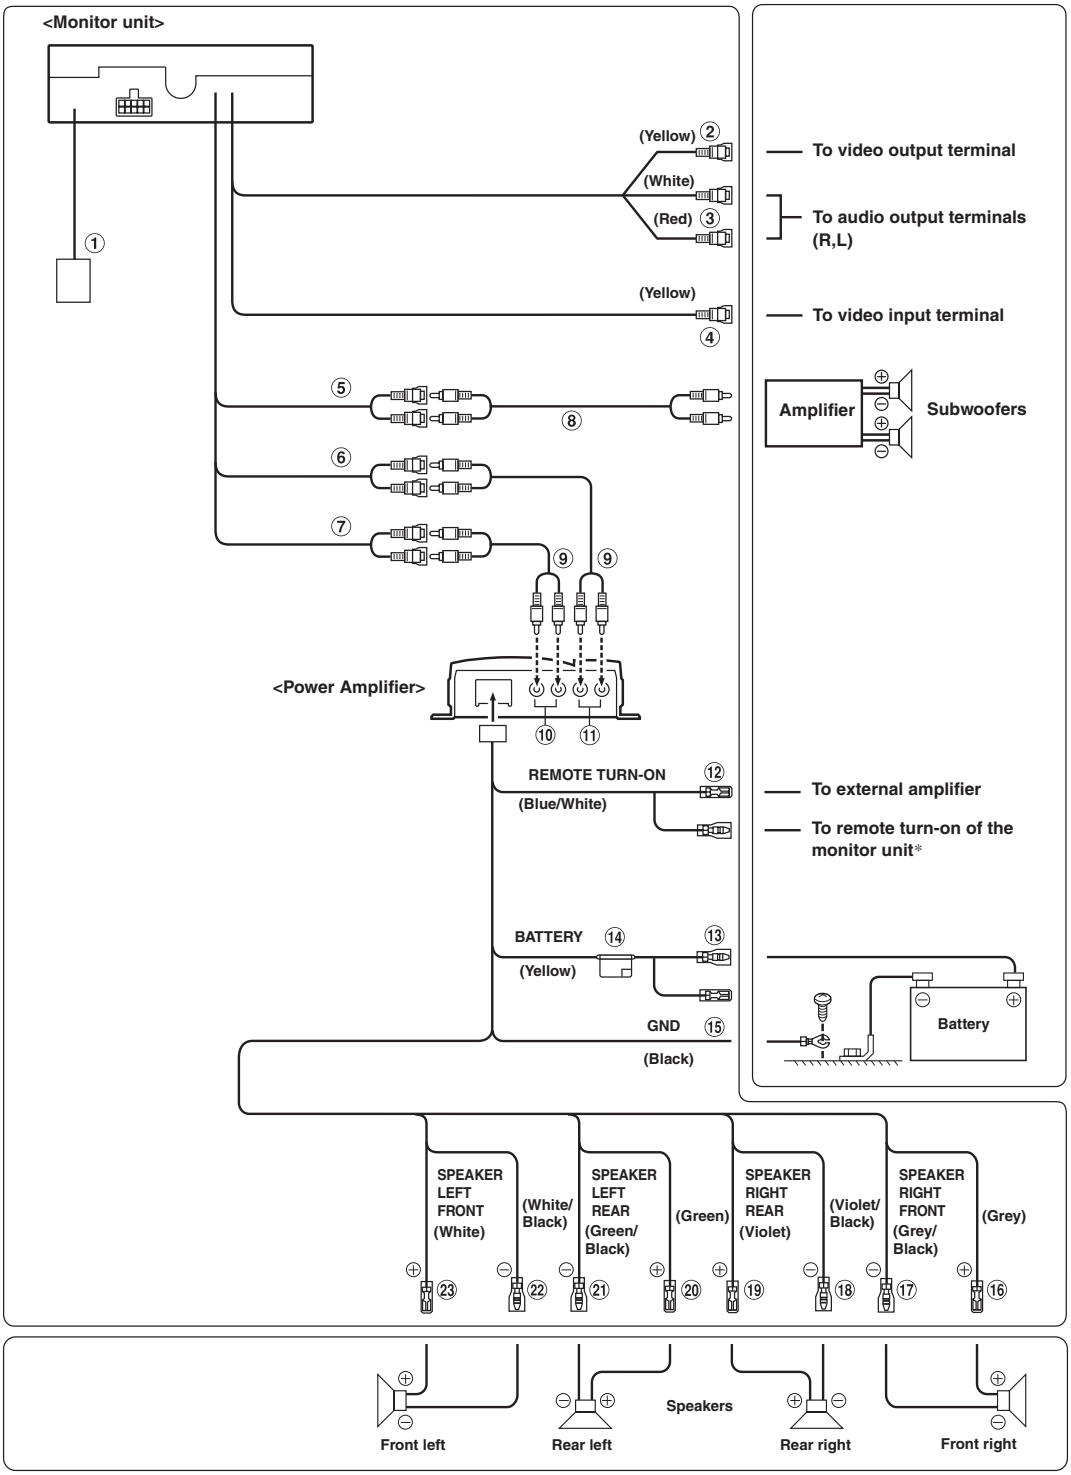

* *Do not connect the power supply cable when the ignition is turned on or set to Accessory.*

TO CONTENTS

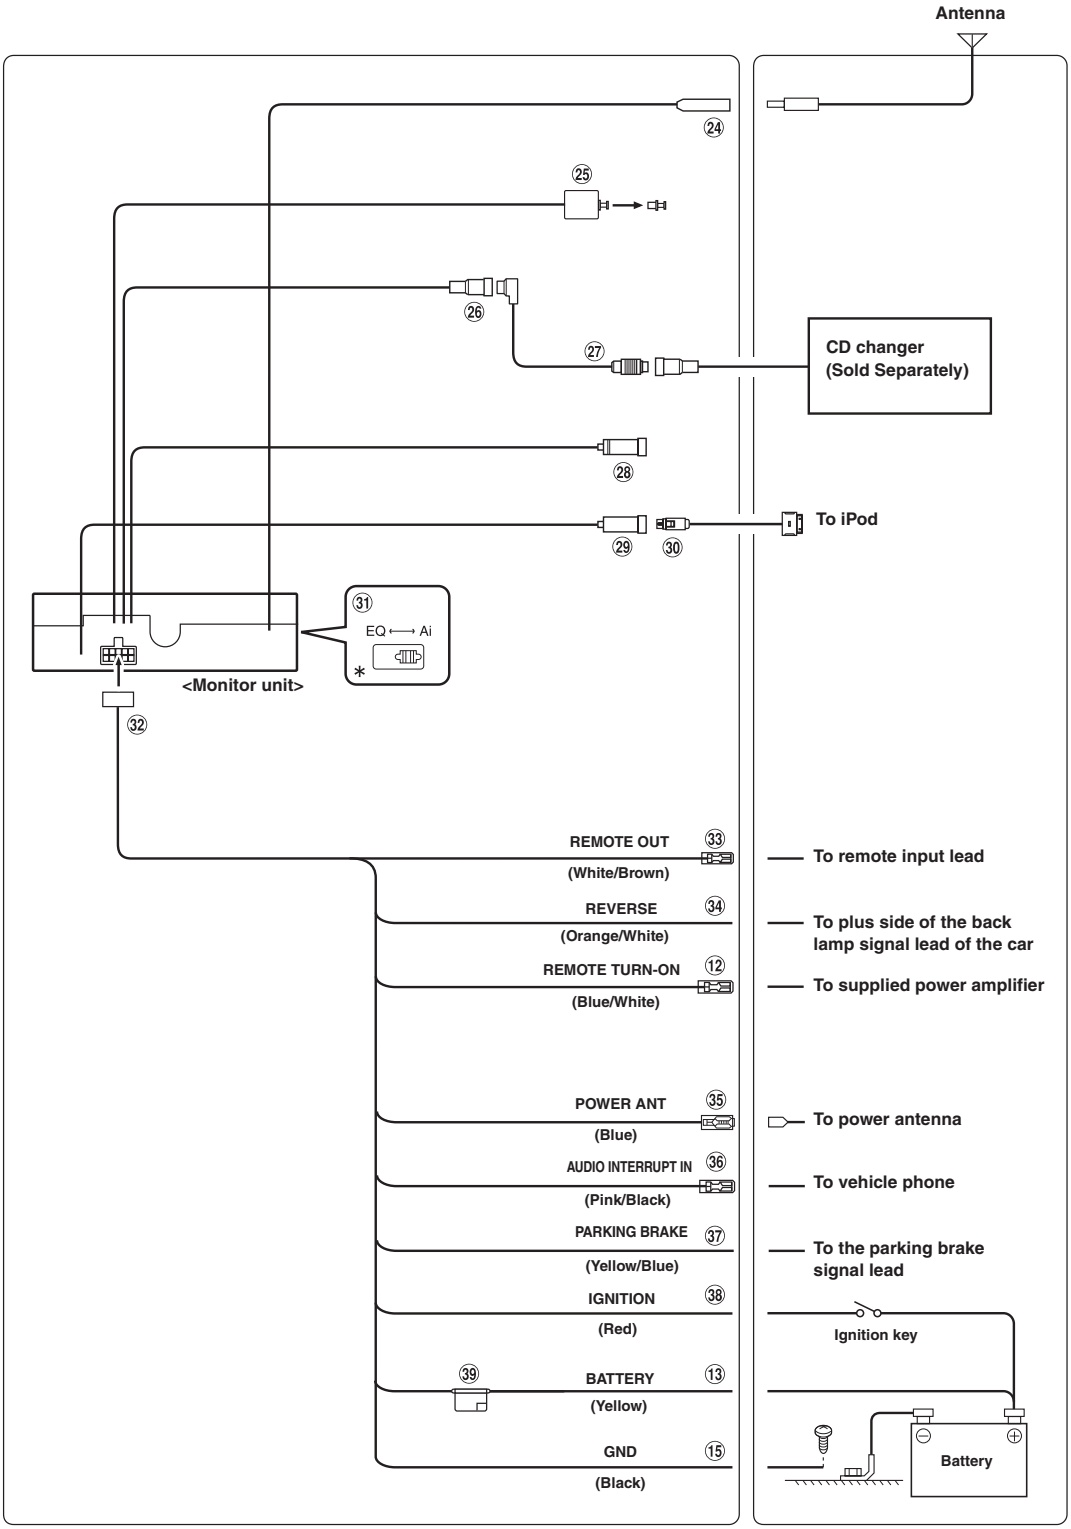

- *Set the system switch to "Ai" when only a changer is connected (when the Ai-NET compatible equalizer is not used).*

* *The label is attached on the bottom of the unit.*

TO CONTENTS

① **DC/DC Converter**
- *Do not install the converter at a location subjected to water such as under the floor mat or air conditioner. This may cause a malfunction.*
- *Do not bundle the DC/DC converter cable with other audio cables. Also, do not install the cables directly next to the unit. Doing so may induce noise into your system.*
- *Keep the DC/DC converter away from the Antenna cables and the rear side of the unit, otherwise noise may be generated when receiving radio broadcast.*

② **Video Input Connector (AUX INPUT) (Yellow)**
Input the video.

③ **Audio Input Connectors (AUX INPUT)**
RED is right and WHITE is left input the audio.

④ **Video Output Connector (Yellow)**
Output the video.

⑤ **Subwoofer RCA Connectors**
Connect the input lead of an amplifier for the subwoofer to this terminal.

⑥ **Front Output RCA Connectors**
RED is right and WHITE is left.

⑦ **Rear Output RCA Connectors**
RED is right and WHITE is left.

⑧ **RCA Extension Cable (sold separately)**

⑨ **RCA Extension Cable (Included)**

⑩ **Rear Input Terminals**

⑪ **Front Input Terminals**

⑫ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

⑬ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.

⑭ **Fuse Holder (15A)**

⑮ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑯ **Right Front (+) Speaker Output Lead (Grey)**

⑰ **Right Front (–) Speaker Output Lead (Grey/Black)**

⑱ **Right Rear (–) Speaker Output Lead (Violet/Black)**

⑲ **Right Rear (+) Speaker Output Lead (Violet)**

⑳ **Left Rear (+) Speaker Output Lead (Green)**

㉑ **Left Rear (–) Speaker Output Lead (Green/Black)**

㉒ **Left Front (–) Speaker Output Lead (White/Black)**

㉓ **Left Front (+) Speaker Output Lead (White)**

㉔ **Antenna Receptacle**

㉕ **Digital Output Terminal (Optical)**
Use when combining fiber digital input compatible products.

㉖ **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, etc.) equipped with Ai-NET.

- *Interface adapter (KCA-420i) is not recommended for use with this product.*
- *You can input TV/video sound by connecting an optional Ai-NET/ RCA Interface cable (KCA-121B) to this component.*

㉗ **Ai-NET Cable (Included with CD Changer)**

㉘ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

㉙ **iPod Direct Connector**
Control iPod signals.
Connect this to an iPod, using the (sold separately) FULL SPEED™ Connection Cable (KCE-422i).

㉚ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**

㉛ **System Switch**
When connecting a processor or divider using Ai-NET, place this switch in the EQ position. When no device is connected, leave the switch in the Ai position.

- *Be sure to turn the power off to the unit before changing the switch position.*

㉜ **Power Supply Connector**

㉝ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

㉞ **Reverse Lead (Orange/White)**
Use only when a back-up camera is connected. Connect to the plus side of the car's reverse lamp that lights when the transmission is shifted into reverse (R).
Switches the video picture to the back-up camera. This is linked with putting the car into reverse (R).

㉟ **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.

㊱ **Audio Interrupt In Lead (Pink/Black)**

㊲ **Parking Brake Lead (Yellow/Blue)**
Connect this lead to the power supply side of the parking brake switch to transmit the parking brake status signals to the IVA-D100E.

㊳ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.

㊴ **Fuse Holder (7.5A)**

TO CONTENTS

System Example

Connect the Ai-NET compatible audio processor (Fiber digital compatible), Navigation system, DVD player and changer.

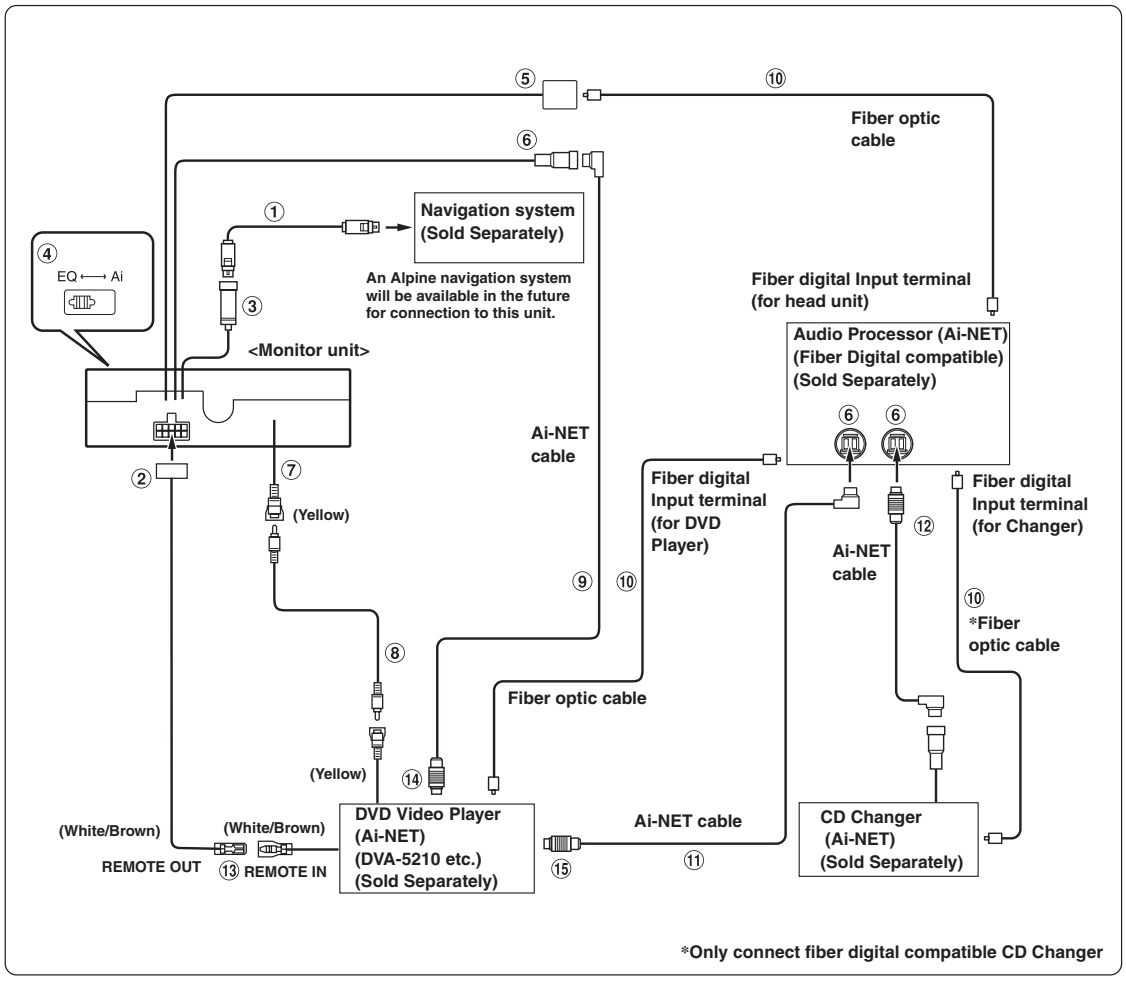

- *When the fiber optic compatible product is connected, it is necessary to set the mode of this unit.*

Please observe the following when using Fiber Optic Cable.

- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*

TO CONTENTS

① **RGB Cable (Included with Navigation or sold separately)**

② **Power Supply Connector**

③ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

④ **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ position. When no device is connected, leave the switch in the Ai position.
- *Be sure to turn the power off to the unit before changing the switch position.*

⑤ **Digital Output Terminal**

⑥ **Ai-NET Connector**
Connect this to the output or input connector of other product equipped with Ai-NET.

⑦ **AUX Video Input Connector (AUX INPUT)**
Connect the video output lead of a DVD video player or DVD changer to this terminal.

⑧ **RCA Extension Cable (Included with DVD video player)**

⑨ **Ai-NET Cable (Included with DVD video player)**

⑩ **Fiber optic Cable (Sold Separately)**

⑪ **Ai-NET Cable (Included with Audio Processor)**

⑫ **Ai-NET Cable (Included with CD Changer)**

⑬ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑭ **To Ai-NET Connector (Grey)**

⑮ **To Ai-NET Connector (Black)**

TO CONTENTS

When Connecting External Equipment

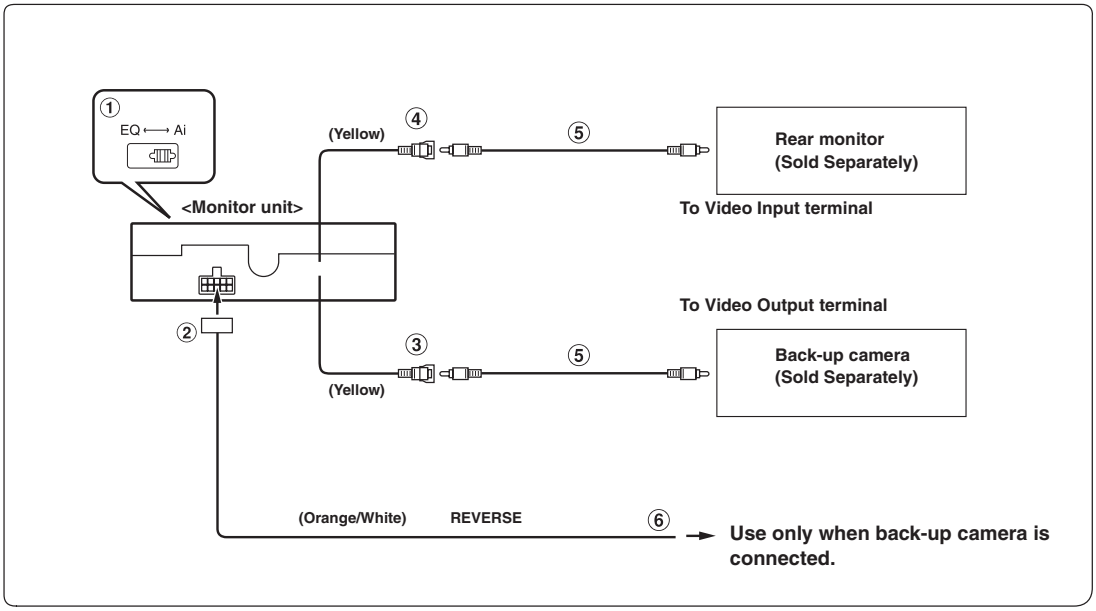

① **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ position. When no device is connected, leave the switch in the Ai position.
- *Be sure to turn the power off to the unit before changing the switch position.*

② **Power Supply Connector**

③ **AUX Video Input Connector (AUX INPUT)**
Use when connecting a back-up camera.

④ **AUX Video Output Connector**
Use when connecting an optional monitor, etc.

⑤ **RCA Extension Cable (Sold separately)**

⑥ **Reverse Lead (Orange/White)**
Connect to the plus side of the car's reverse lamp which lights when the transmission is shifted into reverse (R). Switches the video picture to the back-up camera. This is linked to putting the car into reverse (R).

TO CONTENTS

Extension Cable

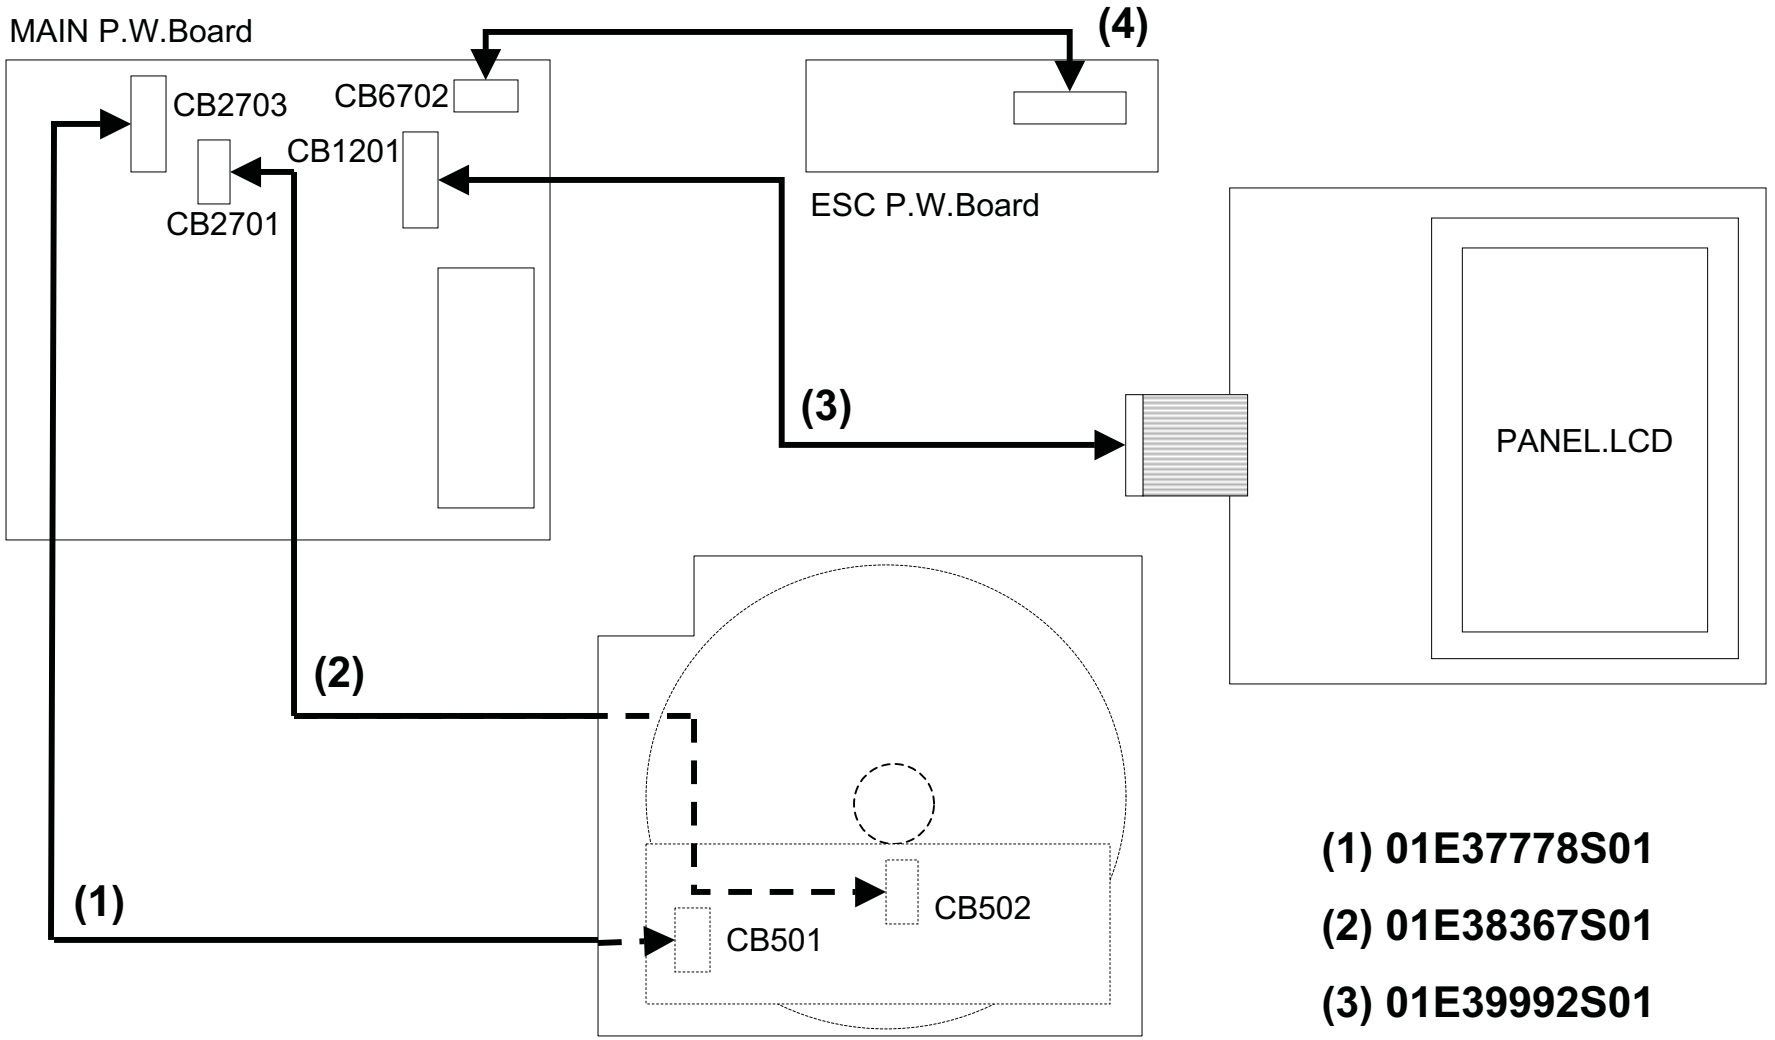

*Always connect the Extension Cable when making checks of voltage and repair.

DVD Deck Mechanism (DV37M15B)

(1) 01E37778S01

(2) 01E38367S01

(3) 01E39992S01

(4) 01E37788S01

TO CONTENTS

Electrical Parts List (Monitor Unit)

* Each parts on P.W.Board are described in order of the reference number.

NOTE : #1 : For North American Model Only,
$1 : For General Foreign (Region3) Model Only,
%1 : For General Foreign (Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

=======MAIN P.W.Board

BZ3001	50T15447Y02	BUZZER,PKM13EPY -R5
C1000	08S65669Y01	CAP,CER 334KX7R1E-CP
C1001	08S82122F32	CAP,CER.62RJ-CH1H-CP
C1002	08S82122F19	CAP,CER.18RJ-CH1H-CP
C1003	08S82122F27	CAP,CER.39RJ-CH1H-CP
C1004	08S65670Y01	CAP,CER 106KX5R1C-CP
C1005	08S45677W60	CAP,CER 102J-CH1H-CP
C1006	08S45677W60	CAP,CER 102J-CH1H-CP
C1007	08S65670Y04	CAP,CER 475KX5R1E-CP
C1011	08S45676W85	CAP,CER 104K-B1C -CP
C1012	08S65670Y01	CAP,CER 106KX5R1C-CP
C1014	08T65231Y01	CAP,CER 226K-BJ1A-CP
C1015	08S45676W80	CAP,CER 223K-B1E -CP
C1018	08S45676W73	CAP,CER.103K-B1H -CP
C1027	08S65670Y01	CAP,CER 106KX5R1C-CP
C1028	08S65670Y01	CAP,CER 106KX5R1C-CP
C1029	08T65231Y03	CAP,CER 106K-BJ1E-CP
C1030	08T65231Y03	CAP,CER 106K-BJ1E-CP
C1032	08S65670Y01	CAP,CER 106KX5R1C-CP
C1033	08S65670Y01	CAP,CER 106KX5R1C-CP
C1101	08S45676W80	CAP,CER 223K-B1E -CP
C1104	08S45676W80	CAP,CER 223K-B1E -CP
C1202	08S45676W80	CAP,CER 223K-B1E -CP
C1203	08S45676W80	CAP,CER 223K-B1E -CP
C1204	08S45676W80	CAP,CER 223K-B1E -CP
C1205	08S45676W80	CAP,CER 223K-B1E -CP
C1206	08S45676W80	CAP,CER 223K-B1E -CP
C1207	08S45676W80	CAP,CER 223K-B1E -CP
C1208	08S65670Y01	CAP,CER 106KX5R1C-CP
C1209	08S65670Y01	CAP,CER 106KX5R1C-CP
C2001	08S65670Y01	CAP,CER 106KX5R1C-CP
C2002	08S65670Y01	CAP,CER 106KX5R1C-CP
C2003	08S65676Y03	CAP,CER 225KX7R1C-CP
C2004	08S65676Y03	CAP,CER 225KX7R1C-CP
C2005	08S65674Y06	CAP,CER 475KX5R1A-CP
C2006	08S65676Y03	CAP,CER 225KX7R1C-CP
C2007	08S65674Y06	CAP,CER 475KX5R1A-CP
C2008	08S65676Y03	CAP,CER 225KX7R1C-CP
C2009	08S45677W60	CAP,CER 102J-CH1H-CP
C2010	08S65674Y05	CAP,CER 105KX5R1C-CP
C2011	08S65674Y05	CAP,CER 105KX5R1C-CP
C2012	08S65674Y05	CAP,CER 105KX5R1C-CP
C2013	08S45677W60	CAP,CER 102J-CH1H-CP
C2014	08S65674Y05	CAP,CER 105KX5R1C-CP
C2015	08S65674Y05	CAP,CER 105KX5R1C-CP

C2016	08S65674Y05	CAP,CER 105KX5R1C-CP
C2017	08S45677W60	CAP,CER 102J-CH1H-CP
C2018	08S45677W60	CAP,CER 102J-CH1H-CP
C2020	08S65670Y01	CAP,CER 106KX5R1C-CP
C2025	08S45677W18	CAP,CER.18RJ-CH1H-CP
C2026	08S65670Y01	CAP,CER 106KX5R1C-CP
C2027	08S65670Y01	CAP,CER 106KX5R1C-CP
C2028	08S65670Y01	CAP,CER 106KX5R1C-CP
C2029	08S45677W18	CAP,CER.18RJ-CH1H-CP
C2030	08S65674Y06	CAP,CER 475KX5R1A-CP
C2031	08S65674Y06	CAP,CER 475KX5R1A-CP
C2100	08S65674Y05	CAP,CER 105KX5R1C-CP
C2101	08S65674Y05	CAP,CER 105KX5R1C-CP
C2102	08S45677W16	CAP,CER.15RJ-CH1H-CP
C2103	08S45677W16	CAP,CER.15RJ-CH1H-CP
C2104	08S45677W16	CAP,CER.15RJ-CH1H-CP
C2105	08S45677W16	CAP,CER.15RJ-CH1H-CP
C2106	08S65670Y01	CAP,CER 106KX5R1C-CP
C2107	08S65670Y01	CAP,CER 106KX5R1C-CP
C2108	08S65670Y03	CAP,CER 335KX5R1E-CP
C2109	08S65670Y03	CAP,CER 335KX5R1E-CP
C2110	08S65670Y03	CAP,CER 335KX5R1E-CP
C2111	08S65670Y03	CAP,CER 335KX5R1E-CP
C2112	08S65670Y03	CAP,CER 335KX5R1E-CP
C2113	08S65670Y03	CAP,CER 335KX5R1E-CP
C2114	08S65670Y03	CAP,CER 335KX5R1E-CP
C2115	08S65670Y03	CAP,CER 335KX5R1E-CP
C2116	08S65670Y03	CAP,CER 335KX5R1E-CP
C2117	08S65670Y03	CAP,CER 335KX5R1E-CP
C2118	08S65670Y01	CAP,CER 106KX5R1C-CP
C2119	08S65670Y01	CAP,CER 106KX5R1C-CP
C2120	08S65670Y01	CAP,CER 106KX5R1C-CP
C2121	08S65670Y01	CAP,CER 106KX5R1C-CP
C2201	08S45539Y04	CAP,CER 103KX7R2J-CP
C2202	08S82122F57	CAP,CER.681J-CH1H-CP
C2204	08S82122F57	CAP,CER.681J-CH1H-CP
C2206	08S65128F88	CAP,CER 104K-B1H -CP
C2208	08S82122F61	CAP,CER.102J-CH1H-CP
C2209	08S82122F61	CAP,CER.102J-CH1H-CP
C2210	08S82122F61	CAP,CER.102J-CH1H-CP
C2211	08S82122F61	CAP,CER.102J-CH1H-CP
C2212	08S82122F61	CAP,CER.102J-CH1H-CP
C2213	08S82122F61	CAP,CER.102J-CH1H-CP
C2601	08S65670Y01	CAP,CER 106KX5R1C-CP
C2604	08S65670Y01	CAP,CER 106KX5R1C-CP
C2605	08S65670Y01	CAP,CER 106KX5R1C-CP
C2606	08S65670Y01	CAP,CER 106KX5R1C-CP
C2607	08S65670Y01	CAP,CER 106KX5R1C-CP
C2608	08S65670Y01	CAP,CER 106KX5R1C-CP
C2609	08S65670Y01	CAP,CER 106KX5R1C-CP
C2610	08S65670Y01	CAP,CER 106KX5R1C-CP
C2651	08S65674Y05	CAP,CER 105KX5R1C-CP
C2652	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2653	08S65674Y05	CAP,CER 105KX5R1C-CP
C2654	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2655	08S45677W60	CAP,CER 102J-CH1H-CP
C2656	08S82122F37	CAP,CER.101J-CH1H-CP

	C2657	08S82122F37	CAP,CER.101J-CH1H-CP
	C2658	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2680	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2681	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2701	08S45676W65	CAP,CER.222K-B1H -CP
	C2702	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2703	08T65555Y01	CAP,CER 226K-BJ0J-CP
	C2704	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2705	08S45676W85	CAP,CER 104K-B1C -CP
	C2706	08S65670Y03	CAP,CER 335KX5R1E-CP
	C2707	08S65670Y03	CAP,CER 335KX5R1E-CP
	C2708	08S45677W52	CAP,CER 471J-CH1H-CP
	C2709	08S45677W52	CAP,CER 471J-CH1H-CP
	C2710	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2711	08S45676W80	CAP,CER 223K-B1E -CP
	C2712	08S45676W80	CAP,CER 223K-B1E -CP
	C2713	08S45677W38	CAP,CER 121J-CH1H-CP
	C2714	08S45677W38	CAP,CER 121J-CH1H-CP
	C2715	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2716	08S45677W42	CAP,CER.181J-CH1H-CP
	C2717	08S45677W42	CAP,CER.181J-CH1H-CP
	C2718	08S45677W16	CAP,CER.15RJ-CH1H-CP
	C2719	08S45677W16	CAP,CER.15RJ-CH1H-CP
	C2720	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2721	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2722	08S45677W36	CAP,CER.101J-CH1H-CP
	C2723	08S65670Y01	CAP,CER 106KX5R1C-CP
	C2724	08S45677W36	CAP,CER.101J-CH1H-CP
	C2725	08S45677W36	CAP,CER.101J-CH1H-CP
	C2726	08S45676W65	CAP,CER.222K-B1H -CP
	C2727	08S45676W65	CAP,CER.222K-B1H -CP
	C2728	08S45676W65	CAP,CER.222K-B1H -CP
	C2729	08S45676W65	CAP,CER.222K-B1H -CP
	C2730	08S45677W60	CAP,CER 102J-CH1H-CP
	C2731	08S45677W60	CAP,CER 102J-CH1H-CP
	C2732	08S45677W60	CAP,CER 102J-CH1H-CP
	C2733	08S35374W12	CAP,CER 106K-B0J -CP
	C2734	08S35349Y16	CAP,CER 105K-B1A -CP
	C2735	08S35349Y16	CAP,CER 105K-B1A -CP
	C2736	08S45677W36	CAP,CER.101J-CH1H-CP
	C2737	08S45676W85	CAP,CER 104K-B1C -CP
	C2801	08S45677W60	CAP,CER 102J-CH1H-CP
	C2802	08S45677W60	CAP,CER 102J-CH1H-CP
	C3001	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3002	08S45539Y04	CAP,CER 103KX7R2J-CP
#1	C3004	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3005	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3006	08S65670Y01	CAP,CER 106KX5R1C-CP
	C3007	08S45676W80	CAP,CER 223K-B1E -CP
#1	C3008	08S45676W85	CAP,CER 104K-B1C -CP
	C3009	08S45676W80	CAP,CER 223K-B1E -CP
	C3010	08S45676W85	CAP,CER 104K-B1C -CP
	C3011	08S45676W85	CAP,CER 104K-B1C -CP
	C3012	08S45539Y02	CAP,CER 222KX7R2J-CP
	C3013	08S65670Y01	CAP,CER 106KX5R1C-CP
	C3100	08S65128F90	CAP,CER 473K-B1H -CP
	C3101	08S45676W89	CAP,CER 473K-B1E -CP

C3102	08S35349Y12	CAP,CER 105K-B0J -CP
C3103	08S35349Y12	CAP,CER 105K-B0J -CP
C3104	08S45676W85	CAP,CER 104K-B1C -CP
C3106	08S45676W73	CAP,CER.103K-B1H -CP
C3108	08S45676W85	CAP,CER 104K-B1C -CP
C3111	08S45676W85	CAP,CER 104K-B1C -CP
C3112	08S65670Y01	CAP,CER 106KX5R1C-CP
C3114	08S35374W12	CAP,CER 106K-B0J -CP
C3115	08S35374W12	CAP,CER 106K-B0J -CP
C3118	08S65670Y01	CAP,CER 106KX5R1C-CP
C3119	08S65670Y01	CAP,CER 106KX5R1C-CP
C3202	08S65670Y01	CAP,CER 106KX5R1C-CP
C3230	08S45676W80	CAP,CER 223K-B1E -CP
C3231	08S65128F69	CAP,CER.103K-B1H -CP
C3232	08S65670Y01	CAP,CER 106KX5R1C-CP
C3233	08S65670Y01	CAP,CER 106KX5R1C-CP
C3301	08S65128F88	CAP,CER 104K-B1H -CP
C3302	08S65128F88	CAP,CER 104K-B1H -CP
C3303	08S65128F88	CAP,CER 104K-B1H -CP
C3304	08S65128F88	CAP,CER 104K-B1H -CP
C3310	08S65128F88	CAP,CER 104K-B1H -CP
C3311	08S65667Y05	CAP,CER 105KX5R1A-CP
C3312	08S65670Y01	CAP,CER 106KX5R1C-CP
C3320	08S35374W07	CAP,CER 334K-B1C -CP
C3321	08S45676W73	CAP,CER.103K-B1H -CP
C3322	08S45676W80	CAP,CER 223K-B1E -CP
C3323	08S65670Y01	CAP,CER 106KX5R1C-CP
C3324	08S65670Y01	CAP,CER 106KX5R1C-CP
C3330	08S65128F88	CAP,CER 104K-B1H -CP
C3331	08S45676W85	CAP,CER 104K-B1C -CP
C3332	08S35374W10	CAP,CER 225K-B1A -CP
C3340	08S65128F88	CAP,CER 104K-B1H -CP
C3341	08S45676W85	CAP,CER 104K-B1C -CP
C3342	08S35374W10	CAP,CER 225K-B1A -CP
C3350	08S65128F69	CAP,CER.103K-B1H -CP
C3351	08S45676W80	CAP,CER 223K-B1E -CP
C3352	08S65670Y01	CAP,CER 106KX5R1C-CP
C3353	08S65670Y01	CAP,CER 106KX5R1C-CP
C3360	08S65128F69	CAP,CER.103K-B1H -CP
C3361	08S45676W80	CAP,CER 223K-B1E -CP
C3362	08S65670Y01	CAP,CER 106KX5R1C-CP
C3363	08S65670Y01	CAP,CER 106KX5R1C-CP
C3370	08S65128F69	CAP,CER.103K-B1H -CP
C3371	08S45676W80	CAP,CER 223K-B1E -CP
C3372	08S65670Y01	CAP,CER 106KX5R1C-CP
C3373	08S65670Y01	CAP,CER 106KX5R1C-CP
C3374	08T65555Y01	CAP,CER 226K-BJ0J-CP
C3380	08S35374W07	CAP,CER 334K-B1C -CP
C3381	08T65555Y01	CAP,CER 226K-BJ0J-CP
C3382	08T65555Y01	CAP,CER 226K-BJ0J-CP
C3383	08S45676W80	CAP,CER 223K-B1E -CP
C3401	08S65128F69	CAP,CER.103K-B1H -CP
C3402	08S45676W80	CAP,CER 223K-B1E -CP
C3403	08S65670Y01	CAP,CER 106KX5R1C-CP
C3404	08S65670Y01	CAP,CER 106KX5R1C-CP
C4006	08S82122F45	CAP,CER.221J-CH1H-CP
C4007	08S82122F61	CAP,CER.102J-CH1H-CP

C4009	08S82122F61	CAP,CER.102J-CH1H-CP
C4011	08S65674Y05	CAP,CER 105KX5R1C-CP
C4012	08S65674Y05	CAP,CER 105KX5R1C-CP
C4013	08S65674Y05	CAP,CER 105KX5R1C-CP
C4014	08S65674Y05	CAP,CER 105KX5R1C-CP
C4015	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4016	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4017	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4018	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4029	08S65670Y01	CAP,CER 106KX5R1C-CP
C4030	08S65670Y01	CAP,CER 106KX5R1C-CP
C4031	08S65670Y01	CAP,CER 106KX5R1C-CP
C4032	08S65670Y01	CAP,CER 106KX5R1C-CP
C4033	08S65676Y02	CAP,CER 475KX7R1A-CP
C4038	08S65670Y01	CAP,CER 106KX5R1C-CP
C4040	08S65670Y01	CAP,CER 106KX5R1C-CP
C4041	08S45676W85	CAP,CER 104K-B1C -CP
C4047	08S65670Y01	CAP,CER 106KX5R1C-CP
C4048	08S65670Y01	CAP,CER 106KX5R1C-CP
C4049	08S65670Y01	CAP,CER 106KX5R1C-CP
C4054	08S82122F61	CAP,CER.102J-CH1H-CP
C4055	08S65674Y02	CAP,CER 105KX5R1A-CP
C4056	08S65670Y01	CAP,CER 106KX5R1C-CP
C4057	08S45676W85	CAP,CER 104K-B1C -CP
C4058	08S45676W85	CAP,CER 104K-B1C -CP
C4059	08S65670Y01	CAP,CER 106KX5R1C-CP
C4060	08S65670Y01	CAP,CER 106KX5R1C-CP
C4062	08S82122F45	CAP,CER.221J-CH1H-CP
C4063	08S65674Y02	CAP,CER 105KX5R1A-CP
C4064	08S65670Y01	CAP,CER 106KX5R1C-CP
C4501	08S45677W36	CAP,CER.101J-CH1H-CP
C4502	08S45677W36	CAP,CER.101J-CH1H-CP
C4503	08S45677W36	CAP,CER.101J-CH1H-CP
C4504	08S45539Y04	CAP,CER 103KX7R2J-CP
C4505	08S65674Y05	CAP,CER 105KX5R1C-CP
C4506	08S65674Y05	CAP,CER 105KX5R1C-CP
C4507	08S65674Y05	CAP,CER 105KX5R1C-CP
C4508	08S65674Y05	CAP,CER 105KX5R1C-CP
C4509	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4510	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4511	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4512	08S45677W20	CAP,CER.22RJ-CH1H-CP
C4514	08S65670Y01	CAP,CER 106KX5R1C-CP
C4517	08S65670Y01	CAP,CER 106KX5R1C-CP
C4518	08S65670Y01	CAP,CER 106KX5R1C-CP
C5001	08S45676W85	CAP,CER 104K-B1C -CP
C5002	08S35374W11	CAP,CER 475K-B0J -CP
C5003	08S45677W14	CAP,CER.12RJ-CH1H-CP
C5004	08S45677W14	CAP,CER.12RJ-CH1H-CP
C5005	08S45677W60	CAP,CER 102J-CH1H-CP
C5006	08S45677W60	CAP,CER 102J-CH1H-CP
C5007	08S45676W85	CAP,CER 104K-B1C -CP
C5008	08S45676W85	CAP,CER 104K-B1C -CP
C5009	08S45677W60	CAP,CER 102J-CH1H-CP
C5010	08S45676W85	CAP,CER 104K-B1C -CP
C5011	08S45676W85	CAP,CER 104K-B1C -CP
C5012	08S45677W60	CAP,CER 102J-CH1H-CP

C5013	08S65670Y01	CAP,CER 106KX5R1C-CP
C5014	08S45676W80	CAP,CER 223K-B1E -CP
C5015	08S65128F88	CAP,CER 104K-B1H -CP
C5016	08S45677W60	CAP,CER 102J-CH1H-CP
C5017	08S45676W80	CAP,CER 223K-B1E -CP
C5018	08S45677W60	CAP,CER 102J-CH1H-CP
C5019	08T65555Y01	CAP,CER 226K-BJ0J-CP
C5020	08T65555Y01	CAP,CER 226K-BJ0J-CP
C5021	08S45676W65	CAP,CER.222K-B1H -CP
C5024	08S45676W80	CAP,CER 223K-B1E -CP
C5025	08S65128F78	CAP,CER.223K-B1H -CP
C5026	08S65128F78	CAP,CER.223K-B1H -CP
C5027	08S65128F78	CAP,CER.223K-B1H -CP
C5028	08S45677W60	CAP,CER 102J-CH1H-CP
C5029	08S45677W60	CAP,CER 102J-CH1H-CP
C5030	08S45677W60	CAP,CER 102J-CH1H-CP
C5031	08S45677W60	CAP,CER 102J-CH1H-CP
C5032	08S45677W60	CAP,CER 102J-CH1H-CP
C6000	08S45677W20	CAP,CER.22RJ-CH1H-CP
C6001	08S45677W20	CAP,CER.22RJ-CH1H-CP
C6002	08S65670Y01	CAP,CER 106KX5R1C-CP
C6003	08S45677W60	CAP,CER 102J-CH1H-CP
C6004	08S65670Y01	CAP,CER 106KX5R1C-CP
C6006	08S45676W80	CAP,CER 223K-B1E -CP
CB1201	09T75225Y50	FFC,51374-5093 -ER
CB2200	09T25436Y09	WTB,53253-0910 -DB
CB2201	09T25436Y06	WTB,53253-0610 -DB
CB2202	09T25436Y03	WTB,53253-0310 -DB
CB2701	09T15107Y24	FFC,52435-2491 -ED
CB2702	09T85454W03	WTB,53398-0390 -E6
CB2703	09T45391Y45	FFC,IMSA9632S-45Y-EQ
CB3301	09T61460F02	WTB,B- 2P-VH +
CB3302	09T55228W08	WTB,SC25-08WS -DB
CB4001	09T25436Y05	WTB,53253-0510 -DB
CB4002	09T25436Y02	WTB,53253-0210 -DB
CB4501	09T25436Y11	WTB,53253-1110 -DB
CB6500	09T85454W08	WTB,53398-0890 -E9
CB6501	09T85454W07	WTB,53398-0790 -E9
CB6702	09T15536Y20	FFC,FH12-20S-0.5S-E9
D1001	48T85357W01	DIO,1PS226 -CP
D1101	48T25665Y01	DIO,1SS355-TE17 -CP
D1201	48T25274Y01	DIO,MA4S159-TX -CP
D1202	48T25274Y01	DIO,MA4S159-TX -CP
D2100	48T25651W01	DIO,CP MA152WA
D2101	48T25651W01	DIO,CP MA152WA
D2102	48T25651W01	DIO,CP MA152WA
D2682	48T25665Y01	DIO,1SS355-TE17 -CP
D3000	48T25593Y01	DIO,S1G-6904 -E1
D3001	48T63462F01	DIO,CP.DAN202K -96
D3002	48T63462F01	DIO,CP.DAN202K -96
D3004	48T25665Y01	DIO,1SS355-TE17 -CP
D3100	48T25593Y01	DIO,S1G-6904 -E1
D3201	48T25665Y01	DIO,1SS355-TE17 -CP
D3202	48T85357W01	DIO,1PS226 -CP
D3203	48T25593Y01	DIO,S1G-6904 -E1
D3301	48T25564Y01	DIO,MA113-TX -CP
D3330	48T25665Y01	DIO,1SS355-TE17 -CP

D5001	48T63462F01	DIO,CP.DAN202K -96
D5002	48T45701Y01	DIO,MA2S728-TX -CP
D5003	48T45701Y01	DIO,MA2S728-TX -CP
D5004	48T94608F03	DIO,CP .DAN202U(MIN)
D5005	48T25665Y01	DIO,1SS355-TE17 -CP
D5006	48T25665Y01	DIO,1SS355-TE17 -CP
D5007	48T85357W01	DIO,1PS226 -CP
D5008	48T85357W01	DIO,1PS226 -CP
D6000	48T25665Y01	DIO,1SS355-TE17 -CP
E3100	23T75487W37	CAP,RZ 332-1C +
E3103	23S75244Y20	CAP,ELY 221-1C -E6
E4011	23S65134W26	CAP,ELY 471-1A(8)-EA
E4021	23S65134W26	CAP,ELY 471-1A(8)-EA
F1201	65T75477Y05	FUSE,CCP2E 1.0A -CP
F3100	65T75477Y01	FUSE,CCP2E 0.4A -CP
F4501	65T75477Y05	FUSE,CCP2E 1.0A -CP
IC1000	51T75197W10	AN77L10M-E1 -NE2
IC1001	51T93333F01	NJM2904M-TE3 -SE2
IC1004	51T25711Y04	BA08SFP-E2 -NE5
IC1101	51T15192Y01	TC74VHC14FT-EL -SE5
IC1102	51T15194Y01	TC74VHCT08AFT-EL-SE5
IC1201	51T75628W02	BA6285AFP-Y-E2 -SE9
IC1202	51T75628W02	BA6285AFP-Y-E2 -SE9
IC1203	51T15194Y01	TC74VHCT08AFT-EL-SE5
IC2001	51-05610Z01	BD3427K -QT
IC2002	51T25576W07	NJM4580V-TE2 -SE2
IC2100	51T25576W07	NJM4580V-TE2 -SE2
IC2101	51T25576W07	NJM4580V-TE2 -SE2
IC2600	51T25576W07	NJM4580V-TE2 -SE2
IC2650	51T15647Y01	NJM4558V-TE2 -SE2
IC2701	51T25183Y02	TC7SET08FU-EL -CP
IC2702	51T55240Y01	PCM1742KE -SE2
IC2703	51T25576W07	NJM4580V-TE2 -SE2
IC3100	51-04412Z01	L5960PD -SEU
IC3101	51-04315Z22	BU4229G-TR -CP
IC3230	51T25259Y03	BA00ASFP-E2 -NE5
IC3310	51-04428Z01	BD7800FP-E2 -NE5
IC3320	51T65666Y03	NJM2880U1-05-TE1-NE2
IC3330	51-02322Z01	NJM2860F3-05-TE1 -CP
IC3340	51-02322Z01	NJM2860F3-05-TE1 -CP
IC3350	51T25259Y03	BA00ASFP-E2 -NE5
IC3360	51T45659Y02	BA00BC0WFP-E2 -NE5
IC3370	51T45659Y02	BA00BC0WFP-E2 -NE5
IC3380	51-01520Z01	PQ012FZ01ZPH -NE5
IC3401	51T25259Y03	BA00ASFP-E2 -NE5
IC4000	51-04557Z01	CXA2089Q -QT
IC4001	51T25576W07	NJM4580V-TE2 -SE2
IC4002	51T15567Y01	NJM2535V-TE2 -SE2
IC4501	51T25576W07	NJM4580V-TE2 -SE2
IC4502	51T15192Y01	TC74VHC14FT-EL -SE5
IC5000	51-05593Z01	IC,D703266YGJ-506-QT
IC5001	51T93532F05	TC4S01F-TE85L -CP
IC5003	51T45594Y01	TDA3664 -NE2
IC5004	51T65777Y01	BR24L04F-W-E2 -SE2
IC6000	51T15194Y01	TC74VHCT08AFT-EL-SE5
IC6001	51T25183Y02	TC7SET08FU-EL -CP
IC6002	51T55070W05	MB88385CPF-ER -SE9

	L1001	24T25164Y21	IND,FSLM2520 4R7J-CP
	L1002	24T16403W29	COI,IND.15R-M -CP
	L1003	24T55488Y20	IND,LLQ1608 R027J-CP
	L1004	24T55488Y24	IND,LLQ1608 R039J-CP
	L2701	24T95456W27	FBI,BLM18PG181SH1-CP
	L2702	24T95456W27	FBI,BLM18PG181SH1-CP
	L2703	24T65689Y01	FBI,FBMJ2125HS420-CP
	L2704	24T65689Y01	FBI,FBMJ2125HS420-CP
	L2705	24T95456W12	FBI,BLM18AG102SH1-CP
	L2706	24T95456W12	FBI,BLM18AG102SH1-CP
	Q1000	48T52437F01	TR ,2SB709A-QR/TX-CP
	Q1001	48T94606F03	TR,DTC124EUA-T106-CP
	Q1101	48T94606F08	TR,DTC143EUA-T106-CP
	Q1102	48T75205Y01	TR,FMC2A-T148 -CP
	Q1103	48T75205Y01	TR,FMC2A-T148 -CP
	Q1104	48T75205Y01	TR,FMC2A-T148 -CP
	Q1105	48T75205Y01	TR,FMC2A-T148 -CP
	Q1201	48T94606F01	TR,DTC144EUA-T106-CP
	Q1202	48T94582F01	TR ,CP 2SC4081-Q
	Q2001	48T94606F03	TR,DTC124EUA-T106-CP
	Q2100	48T25317Y01	TR,XN0F256-TX -CP
	Q2101	48T25317Y01	TR,XN0F256-TX -CP
	Q2102	48T25317Y01	TR,XN0F256-TX -CP
	Q2680	48T75205Y01	TR,FMC2A-T148 -CP
	Q2683	48T94606F03	TR,DTC124EUA-T106-CP
	Q2701	48T63420F03	TR,2SA1037AK-R146-CP
	Q2702	48T63420F03	TR,2SA1037AK-R146-CP
	Q3001	48T62966F01	TR,DTA143EKA-T146-CP
#1	Q3002	48T94606F03	TR,DTC124EUA-T106-CP
	Q3003	48T62966F01	TR,DTA143EKA-T146-CP
	Q3004	48T94606F03	TR,DTC124EUA-T106-CP
	Q3005	48T94606F01	TR,DTC144EUA-T106-CP
	Q3016	48T75205Y02	TR,FMC3A-T148 -CP
	Q3101	48T75205Y01	TR,FMC2A-T148 -CP
	Q3102	48T75180Y01	TR,IMH1A-T110 -CP
	Q3206	48T63417F03	TR ,CP.C2412K-BR -96
	Q3207	48T94606F03	TR,DTC124EUA-T106-CP
	Q3208	48T94606F67	TR,DTA123YUA-T106-CP
	Q3209	48T15141W04	TR,2SB1184F5-R -E5
	Q3210	48T63417F03	TR ,CP.C2412K-BR -96
	Q3212	48T15141W04	TR,2SB1184F5-R -E5
	Q3390	48T63417F01	TR ,CP.2SC2412K -96
	Q3391	48T45388Y03	TR,2SA1797-Q-T100-E2
	Q4002	48T63417F01	TR ,CP.2SC2412K -96
	Q4003	48T63417F01	TR ,CP.2SC2412K -96
	Q4004	48T63417F01	TR ,CP.2SC2412K -96
	Q4005	48T63420F03	TR,2SA1037AK-R146-CP
	Q4501	48T75205Y01	TR,FMC2A-T148 -CP
	Q4502	48T75205Y01	TR,FMC2A-T148 -CP
	Q4504	48T15141W04	TR,2SB1184F5-R -E5
	Q4505	48T63417F01	TR ,CP.2SC2412K -96
	Q5001	48T94606F06	TR,DTC114EUA-T106-CP
	Q5003	48T63419F04	TR,CP.2SA1036K-HR-96
	Q5004	48T94606F01	TR,DTC144EUA-T106-CP
	Q5005	48T75205Y02	TR,FMC3A-T148 -CP
	Q5006	48T75205Y02	TR,FMC3A-T148 -CP
	Q5007	48T75205Y02	TR,FMC3A-T148 -CP

Q5008	48T75205Y02	TR,FMC3A-T148 -CP
Q6000	48T94606F56	TR,DTA114EUA-T106-CP
Q6001	48T75205Y02	TR,FMC3A-T148 -CP
R1001	06S55361Y17	RES,RK 10RJ 1/4 -CP
R1002	06S55362Y39	RES,RK JUMPER 1/4-CP
R1003	06S55362Y39	RES,RK JUMPER 1/4-CP
R1004	06S55366Y39	RES,RK JUMPER1/10-CP
R1005	06S55366Y39	RES,RK JUMPER1/10-CP
R1006	06S55361Y97	RES,RK 223J 1/4 -CP
R1007	06S55361Y98	RES,RK 243J 1/4 -CP
R1011	06S55365Y65	RES,RK 102J 1/10 -CP
R1012	06S55365Y65	RES,RK 102J 1/10 -CP
R1013	06S55365Y93	RES,RK 153J 1/10 -CP
R1014	06S55365Y97	RES,RK 223J 1/10 -CP
R1029	06S55365Y41	RES,RK 101J 1/10 -CP
R1101	06S55366Y06	RES,RK 473J 1/10 -CP
R1102	06S55366Y39	RES,RK JUMPER1/10-CP
R1103	06S55361Y33	RES,RK 47RJ 1/4 -CP
R1104	06S55361Y89	RES,RK 103J 1/4 -CP
R1105	06S55361Y33	RES,RK 47RJ 1/4 -CP
R1106	06S55361Y73	RES,RK 222J 1/4 -CP
R1107	06S45674W97	RES,RK 473J 1/10 -CP
R1108	06S45674W97	RES,RK 473J 1/10 -CP
R1109	06S45674W33	RES,RK 101J 1/10 -CP
R1110	06S55365Y41	RES,RK 101J 1/10 -CP
R1111	06S55361Y65	RES,RK 102J 1/4 -CP
R1112	06S55361Y65	RES,RK 102J 1/4 -CP
R1201	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1202	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1203	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1204	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1205	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1206	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1207	06S55365Y59	RES,RK 561J 1/10 -CP
R1208	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1209	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1210	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1211	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1212	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1213	06S55361Y01	RES,RK 2R2J 1/4 -CP
R1214	06S55365Y41	RES,RK 101J 1/10 -CP
R1215	06S55365Y41	RES,RK 101J 1/10 -CP
R1216	06S55365Y41	RES,RK 101J 1/10 -CP
R1217	06S55365Y41	RES,RK 101J 1/10 -CP
R2001	06S55366Y02	RES,RK 333J 1/10 -CP
R2006	06S55365Y98	RES,RK 243J 1/10 -CP
R2007	06S55365Y98	RES,RK 243J 1/10 -CP
R2008	06S55365Y98	RES,RK 243J 1/10 -CP
R2009	06S55365Y98	RES,RK 243J 1/10 -CP
R2010	06S55365Y85	RES,RK 682J 1/10 -CP
R2011	06S55365Y89	RES,RK 103J 1/10 -CP
R2012	06S55366Y39	RES,RK JUMPER1/10-CP
R2013	06S55366Y39	RES,RK JUMPER1/10-CP
R2101	06S55365Y98	RES,RK 243J 1/10 -CP
R2102	06S55366Y18	RES,RK 154J 1/10 -CP
R2103	06S55366Y18	RES,RK 154J 1/10 -CP
R2104	06S55365Y98	RES,RK 243J 1/10 -CP

R2105	06S55365Y98	RES,RK 243J 1/10 -CP
R2106	06S55365Y98	RES,RK 243J 1/10 -CP
R2107	06S55365Y98	RES,RK 243J 1/10 -CP
R2108	06S55365Y98	RES,RK 243J 1/10 -CP
R2109	06S55365Y98	RES,RK 243J 1/10 -CP
R2110	06S55365Y98	RES,RK 243J 1/10 -CP
R2111	06S55365Y83	RES,RK 562J 1/10 -CP
R2112	06S55365Y83	RES,RK 562J 1/10 -CP
R2113	06S55365Y83	RES,RK 562J 1/10 -CP
R2114	06S55365Y83	RES,RK 562J 1/10 -CP
R2115	06S55365Y83	RES,RK 562J 1/10 -CP
R2116	06S55365Y83	RES,RK 562J 1/10 -CP
R2117	06S55366Y08	RES,RK 563J 1/10 -CP
R2118	06S55366Y08	RES,RK 563J 1/10 -CP
R2119	06S55366Y08	RES,RK 563J 1/10 -CP
R2120	06S55366Y08	RES,RK 563J 1/10 -CP
R2121	06S55365Y85	RES,RK 682J 1/10 -CP
R2122	06S55365Y85	RES,RK 682J 1/10 -CP
R2123	06S55361Y49	RES,RK 221J 1/4 -CP
R2124	06S55361Y49	RES,RK 221J 1/4 -CP
R2125	06S55361Y49	RES,RK 221J 1/4 -CP
R2126	06S55361Y49	RES,RK 221J 1/4 -CP
R2127	06S55361Y47	RES,RK 181J 1/4 -CP
R2128	06S55361Y47	RES,RK 181J 1/4 -CP
R2129	06S55361Y41	RES,RK 101J 1/4 -CP
R2130	06S55361Y41	RES,RK 101J 1/4 -CP
R2131	06S55361Y41	RES,RK 101J 1/4 -CP
R2132	06S55361Y41	RES,RK 101J 1/4 -CP
R2133	06S55361Y41	RES,RK 101J 1/4 -CP
R2134	06S55361Y41	RES,RK 101J 1/4 -CP
R2135	06S55366Y08	RES,RK 563J 1/10 -CP
R2136	06S55366Y08	RES,RK 563J 1/10 -CP
R2546	06S55361Y30	RES,RK 36RJ 1/4 -CP
R2547	06S55361Y31	RES,RK 39RJ 1/4 -CP
R2548	06S55361Y30	RES,RK 36RJ 1/4 -CP
R2549	06S55361Y31	RES,RK 39RJ 1/4 -CP
R2550	06S55361Y30	RES,RK 36RJ 1/4 -CP
R2553	06S55361Y31	RES,RK 39RJ 1/4 -CP
R2554	06S55361Y30	RES,RK 36RJ 1/4 -CP
R2555	06S55361Y31	RES,RK 39RJ 1/4 -CP
R2600	06S55365Y66	RES,RK 112J 1/10 -CP
R2601	06S55365Y66	RES,RK 112J 1/10 -CP
R2604	06S55365Y66	RES,RK 112J 1/10 -CP
R2605	06S55365Y66	RES,RK 112J 1/10 -CP
R2651	06S15593Y81	RES,RK 223F 1/10 -CP
R2652	06S15593Y81	RES,RK 223F 1/10 -CP
R2653	06S15593Y81	RES,RK 223F 1/10 -CP
R2654	06S15593Y81	RES,RK 223F 1/10 -CP
R2657	06S15593Y97	RES,RK 104F 1/10 -CP
R2658	06S15593Y73	RES,RK 103F 1/10 -CP
R2681	06S55365Y89	RES,RK 103J 1/10 -CP
R2686	06S55365Y41	RES,RK 101J 1/10 -CP
R2701	06S55365Y25	RES,RK 22RJ 1/10 -CP
R2702	06S55365Y29	RES,RK 33RJ 1/10 -CP
R2703	06S55365Y29	RES,RK 33RJ 1/10 -CP
R2704	06S55365Y25	RES,RK 22RJ 1/10 -CP
R2705	06S55365Y25	RES,RK 22RJ 1/10 -CP

	R2706	06S55365Y25	RES,RK 22RJ 1/10 -CP
	R2707	06S55366Y31	RES,RK 514J 1/10 -CP
	R2708	06S55365Y25	RES,RK 22RJ 1/10 -CP
	R2709	06S55365Y25	RES,RK 22RJ 1/10 -CP
	R2710	06S55365Y25	RES,RK 22RJ 1/10 -CP
	R2711	06S55365Y41	RES,RK 101J 1/10 -CP
	R2712	06S15593Y51	RES,RK 122F 1/10 -CP
	R2713	06S15593Y51	RES,RK 122F 1/10 -CP
	R2714	06S15593Y91	RES,RK 563F 1/10 -CP
	R2715	06S15593Y91	RES,RK 563F 1/10 -CP
	R2716	06S15593Y75	RES,RK 123F 1/10 -CP
	R2717	06S15593Y75	RES,RK 123F 1/10 -CP
	R2718	06S15593Y77	RES,RK 153F 1/10 -CP
	R2719	06S15593Y77	RES,RK 153F 1/10 -CP
	R2720	06S15593Y90	RES,RK 513F 1/10 -CP
	R2721	06S15593Y90	RES,RK 513F 1/10 -CP
	R2722	06S15593Y65	RES,RK 472F 1/10 -CP
	R2723	06S15593Y65	RES,RK 472F 1/10 -CP
	R2724	06S15593Y03	RES,RK 12RF 1/10 -CP
	R2725	06S15593Y03	RES,RK 12RF 1/10 -CP
	R2726	06S55361Y41	RES,RK 101J 1/4 -CP
	R2727	06S55365Y53	RES,RK 331J 1/10 -CP
	R2728	06S55365Y53	RES,RK 331J 1/10 -CP
	R2729	06S55365Y53	RES,RK 331J 1/10 -CP
	R2730	06S55365Y25	RES,RK 22RJ 1/10 -CP
	R2731	06S55365Y25	RES,RK 22RJ 1/10 -CP
	R2732	06S55365Y53	RES,RK 331J 1/10 -CP
	R2733	06S55365Y41	RES,RK 101J 1/10 -CP
	R2734	06S55365Y53	RES,RK 331J 1/10 -CP
	R3000	06S55361Y51	RES,RK 271J 1/4 -CP
	R3001	06S55361Y51	RES,RK 271J 1/4 -CP
	R3002	06S55361Y89	RES,RK 103J 1/4 -CP
	R3003	06S55365Y89	RES,RK 103J 1/10 -CP
	R3004	06S55366Y06	RES,RK 473J 1/10 -CP
	R3005	06S55361Y65	RES,RK 102J 1/4 -CP
#1	R3006	06S55361Y89	RES,RK 103J 1/4 -CP
	R3007	06S55365Y89	RES,RK 103J 1/10 -CP
	R3008	06S55361Y89	RES,RK 103J 1/4 -CP
	R3009	06S55366Y06	RES,RK 473J 1/10 -CP
	R3010	06S55361Y89	RES,RK 103J 1/4 -CP
	R3011	06S55365Y89	RES,RK 103J 1/10 -CP
	R3012	06S55361Y78	RES,RK 362J 1/4 -CP
	R3013	06S55361Y95	RES,RK 183J 1/4 -CP
	R3101	06S45674W33	RES,RK 101J 1/10 -CP
	R3103	06S15593Y77	RES,RK 153F 1/10 -CP
	R3104	06S15593Y41	RES,RK 471F 1/10 -CP
	R3105	06S55365Y65	RES,RK 102J 1/10 -CP
	R3106	06S45674W33	RES,RK 101J 1/10 -CP
	R3107	06S55366Y06	RES,RK 473J 1/10 -CP
	R3109	06S45348Y31	RES,RK 224F 1/4 -CP
	R3110	06S15593Y87	RES,RK 393F 1/10 -CP
	R3112	06S55365Y49	RES,RK 221J 1/10 -CP
	R3113	06S55365Y97	RES,RK 223J 1/10 -CP
	R3201	06S55365Y89	RES,RK 103J 1/10 -CP
	R3202	06S55361Y15	RES,RK 8R2J 1/4 -CP
	R3204	06S55361Y15	RES,RK 8R2J 1/4 -CP
	R3205	06S55361Y15	RES,RK 8R2J 1/4 -CP

R3207	06S55365Y75	RES,RK 272J 1/10 -CP
R3208	06S55365Y75	RES,RK 272J 1/10 -CP
R3209	06S55365Y99	RES,RK 273J 1/10 -CP
R3210	06S55361Y71	RES,RK 182J 1/4 -CP
R3211	06S55361Y71	RES,RK 182J 1/4 -CP
R3212	06S55361Y99	RES,RK 273J 1/4 -CP
R3213	06S55361Y71	RES,RK 182J 1/4 -CP
R3214	06S55361Y71	RES,RK 182J 1/4 -CP
R3215	06S55361Y89	RES,RK 103J 1/4 -CP
R3217	06S55362Y39	RES,RK JUMPER 1/4-CP
R3218	06S55361Y15	RES,RK 8R2J 1/4 -CP
R3220	06S55365Y75	RES,RK 272J 1/10 -CP
R3221	06S55365Y77	RES,RK 332J 1/10 -CP
R3222	06S55365Y75	RES,RK 272J 1/10 -CP
R3223	06S55365Y77	RES,RK 332J 1/10 -CP
R3224	06S55366Y36	RES,RK 824J 1/10 -CP
R3232	06S15593Y76	RES,RK 133F 1/10 -CP
R3233	06S15593Y17	RES,RK 47RF 1/10 -CP
R3234	06S15593Y56	RES,RK 202F 1/10 -CP
R3235	06S55365Y82	RES,RK 512J 1/10 -CP
R3301	06S55361Y65	RES,RK 102J 1/4 -CP
R3302	06S55361Y65	RES,RK 102J 1/4 -CP
R3303	06S55361Y65	RES,RK 102J 1/4 -CP
R3304	06S55361Y82	RES,RK 512J 1/4 -CP
R3310	06S15594Y08	RES,RK 274F 1/10 -CP
R3311	06S15593Y58	RES,RK 242F 1/10 -CP
R3312	06S15593Y84	RES,RK 303F 1/10 -CP
R3313	06S55365Y82	RES,RK 512J 1/10 -CP
R3320	06S55362Y39	RES,RK JUMPER 1/4-CP
R3330	06S55363Y82	RES,RK 512J 1/8 -CP
R3340	06S55364Y39	RES,RK JUMPER 1/8-CP
R3350	06S15593Y74	RES,RK 113F 1/10 -CP
R3351	06S15593Y35	RES,RK 271F 1/10 -CP
R3352	06S15593Y61	RES,RK 332F 1/10 -CP
R3353	06S55365Y82	RES,RK 512J 1/10 -CP
R3360	06S15593Y72	RES,RK 912F 1/10 -CP
R3361	06S15593Y41	RES,RK 471F 1/10 -CP
R3362	06S15593Y66	RES,RK 512F 1/10 -CP
R3363	06S55365Y82	RES,RK 512J 1/10 -CP
R3364	06S55366Y06	RES,RK 473J 1/10 -CP
R3370	06S55361Y01	RES,RK 2R2J 1/4 -CP
R3371	06S55361Y01	RES,RK 2R2J 1/4 -CP
R3372	06S15593Y77	RES,RK 153F 1/10 -CP
R3373	06S55366Y39	RES,RK JUMPER1/10-CP
R3374	06S15593Y75	RES,RK 123F 1/10 -CP
R3375	06S55365Y82	RES,RK 512J 1/10 -CP
R3380	06S55362Y39	RES,RK JUMPER 1/4-CP
R3383	06S55361Y67	RES,RK 122J 1/4 -CP
R3388	06S55365Y69	RES,RK 152J 1/10 -CP
R3389	06S55365Y71	RES,RK 182J 1/10 -CP
R3390	06S55365Y98	RES,RK 243J 1/10 -CP
R3391	06S55361Y63	RES,RK 821J 1/4 -CP
R3392	06S55361Y63	RES,RK 821J 1/4 -CP
R3393	06S55361Y63	RES,RK 821J 1/4 -CP
R3394	06S55361Y63	RES,RK 821J 1/4 -CP
R3395	06S55361Y79	RES,RK 392J 1/4 -CP
R3396	06S55361Y79	RES,RK 392J 1/4 -CP

R3397	06S55361Y79	RES,RK 392J 1/4 -CP
R3398	06S55361Y79	RES,RK 392J 1/4 -CP
R3401	06S15593Y76	RES,RK 133F 1/10 -CP
R3402	06S15593Y17	RES,RK 47RF 1/10 -CP
R3403	06S15593Y56	RES,RK 202F 1/10 -CP
R3404	06S55365Y82	RES,RK 512J 1/10 -CP
R4001	06S55361Y30	RES,RK 36RJ 1/4 -CP
R4002	06S55361Y31	RES,RK 39RJ 1/4 -CP
R4003	06S15593Y81	RES,RK 223F 1/10 -CP
R4004	06S15593Y81	RES,RK 223F 1/10 -CP
R4005	06S15593Y81	RES,RK 223F 1/10 -CP
R4006	06S15593Y81	RES,RK 223F 1/10 -CP
R4007	06S55365Y41	RES,RK 101J 1/10 -CP
R4008	06S55361Y45	RES,RK 151J 1/4 -CP
R4009	06S15593Y81	RES,RK 223F 1/10 -CP
R4010	06S55365Y41	RES,RK 101J 1/10 -CP
R4011	06S15593Y81	RES,RK 223F 1/10 -CP
R4012	06S55361Y41	RES,RK 101J 1/4 -CP
R4013	06S55365Y41	RES,RK 101J 1/10 -CP
R4014	06S55365Y41	RES,RK 101J 1/10 -CP
R4015	06S15593Y81	RES,RK 223F 1/10 -CP
R4016	06S15593Y81	RES,RK 223F 1/10 -CP
R4017	06S55365Y37	RES,RK 68RJ 1/10 -CP
R4019	06S55365Y37	RES,RK 68RJ 1/10 -CP
R4020	06S55365Y41	RES,RK 101J 1/10 -CP
R4021	06S55361Y41	RES,RK 101J 1/4 -CP
R4022	06S55365Y41	RES,RK 101J 1/10 -CP
R4023	06S55366Y38	RES,RK 105J 1/10 -CP
R4024	06S55366Y38	RES,RK 105J 1/10 -CP
R4025	06S55366Y38	RES,RK 105J 1/10 -CP
R4026	06S55365Y41	RES,RK 101J 1/10 -CP
R4027	06S55361Y51	RES,RK 271J 1/4 -CP
R4028	06S55361Y37	RES,RK 68RJ 1/4 -CP
R4501	06S45348Y34	RES,RK 304F 1/4 -CP
R4502	06S15594Y07	RES,RK 244F 1/10 -CP
R4503	06S55361Y65	RES,RK 102J 1/4 -CP
R4504	06S55361Y65	RES,RK 102J 1/4 -CP
R4505	06S55366Y39	RES,RK JUMPER1/10-CP
R4506	06S55366Y06	RES,RK 473J 1/10 -CP
R4507	06S55361Y41	RES,RK 101J 1/4 -CP
R4511	06S55361Y65	RES,RK 102J 1/4 -CP
R4512	06S55365Y69	RES,RK 152J 1/10 -CP
R4513	06S55365Y69	RES,RK 152J 1/10 -CP
R4514	06S55361Y71	RES,RK 182J 1/4 -CP
R4515	06S55361Y71	RES,RK 182J 1/4 -CP
R4516	06S55361Y71	RES,RK 182J 1/4 -CP
R4517	06S55361Y98	RES,RK 243J 1/4 -CP
R4518	06S55361Y71	RES,RK 182J 1/4 -CP
R4519	06S15593Y81	RES,RK 223F 1/10 -CP
R4520	06S15593Y81	RES,RK 223F 1/10 -CP
R4521	06S15593Y81	RES,RK 223F 1/10 -CP
R4522	06S15593Y81	RES,RK 223F 1/10 -CP
R4523	06S15593Y81	RES,RK 223F 1/10 -CP
R4524	06S15593Y81	RES,RK 223F 1/10 -CP
R4525	06S15593Y81	RES,RK 223F 1/10 -CP
R4526	06S15593Y81	RES,RK 223F 1/10 -CP
R5001	06S55365Y89	RES,RK 103J 1/10 -CP

	R5003	06S15593Y49	RES,RK 102F 1/10 -CP
	R5004	06S55365Y57	RES,RK 471J 1/10 -CP
	R5006	06S55365Y97	RES,RK 223J 1/10 -CP
	R5007	06S55366Y30	RES,RK 474J 1/10 -CP
	R5008	06S55365Y73	RES,RK 222J 1/10 -CP
	R5009	06S55365Y89	RES,RK 103J 1/10 -CP
	R5010	06S55365Y41	RES,RK 101J 1/10 -CP
	R5011	06S55365Y41	RES,RK 101J 1/10 -CP
	R5012	06S55365Y69	RES,RK 152J 1/10 -CP
	R5013	06S55365Y49	RES,RK 221J 1/10 -CP
	R5014	06S55365Y49	RES,RK 221J 1/10 -CP
	R5015	06S55365Y41	RES,RK 101J 1/10 -CP
	R5016	06S55365Y41	RES,RK 101J 1/10 -CP
	R5017	06S55365Y41	RES,RK 101J 1/10 -CP
	R5018	06S55365Y41	RES,RK 101J 1/10 -CP
	R5019	06S55365Y41	RES,RK 101J 1/10 -CP
	R5020	06S55365Y41	RES,RK 101J 1/10 -CP
	R5021	06S55365Y41	RES,RK 101J 1/10 -CP
	R5022	06S55365Y41	RES,RK 101J 1/10 -CP
	R5023	06S55365Y49	RES,RK 221J 1/10 -CP
	R5024	06S55365Y49	RES,RK 221J 1/10 -CP
	R5029	06S55365Y69	RES,RK 152J 1/10 -CP
	R5030	06S55365Y41	RES,RK 101J 1/10 -CP
	R5033	06S55365Y97	RES,RK 223J 1/10 -CP
	R5034	06S55366Y06	RES,RK 473J 1/10 -CP
	R5035	06S55366Y06	RES,RK 473J 1/10 -CP
	R5036	06S55366Y10	RES,RK 683J 1/10 -CP
	R5037	06S55366Y06	RES,RK 473J 1/10 -CP
	R5038	06S55366Y06	RES,RK 473J 1/10 -CP
	R5039	06S55366Y06	RES,RK 473J 1/10 -CP
	R5040	06S55366Y06	RES,RK 473J 1/10 -CP
	R5041	06S55365Y97	RES,RK 223J 1/10 -CP
	R5042	06S55365Y89	RES,RK 103J 1/10 -CP
	R5043	06S55365Y89	RES,RK 103J 1/10 -CP
	R5044	06S55361Y89	RES,RK 103J 1/4 -CP
	R5045	06S55365Y41	RES,RK 101J 1/10 -CP
	R5046	06S55365Y41	RES,RK 101J 1/10 -CP
	R5047	06S55365Y41	RES,RK 101J 1/10 -CP
	R5048	06S55365Y41	RES,RK 101J 1/10 -CP
	R5049	06S55365Y65	RES,RK 102J 1/10 -CP
	R5050	06S55365Y65	RES,RK 102J 1/10 -CP
	R5051	06S55365Y41	RES,RK 101J 1/10 -CP
	R5052	06S55366Y14	RES,RK 104J 1/10 -CP
	R5093	06S55365Y97	RES,RK 223J 1/10 -CP
	R5096	06S55366Y39	RES,RK JUMPER1/10-CP
	R5097	06S55366Y39	RES,RK JUMPER1/10-CP
	R5122	06S55365Y73	RES,RK 222J 1/10 -CP
	R5123	06S55365Y73	RES,RK 222J 1/10 -CP
	R5124	06S55365Y97	RES,RK 223J 1/10 -CP
$1	R5125	06S55365Y89	RES,RK 103J 1/10 -CP
%1	R5125	06S55365Y89	RES,RK 103J 1/10 -CP
&1	R5125	06S55365Y89	RES,RK 103J 1/10 -CP
#1	R5127	06S55365Y89	RES,RK 103J 1/10 -CP
	R5128	06S55365Y89	RES,RK 103J 1/10 -CP
	R5129	06S55365Y97	RES,RK 223J 1/10 -CP
	R5130	06S55365Y97	RES,RK 223J 1/10 -CP
	R5131	06S55365Y97	RES,RK 223J 1/10 -CP

R5132	06S55365Y89	RES,RK 103J 1/10 -CP
R5133	06S55365Y97	RES,RK 223J 1/10 -CP
R5134	06S15593Y63	RES,RK 392F 1/10 -CP
R5135	06S55365Y81	RES,RK 472J 1/10 -CP
R5138	06S55365Y81	RES,RK 472J 1/10 -CP
R5146	06S55365Y41	RES,RK 101J 1/10 -CP
R5147	06S55365Y41	RES,RK 101J 1/10 -CP
R5148	06S55361Y49	RES,RK 221J 1/4 -CP
R5149	06S55365Y81	RES,RK 472J 1/10 -CP
R5150	06S55365Y81	RES,RK 472J 1/10 -CP
R5157	06S55366Y06	RES,RK 473J 1/10 -CP
R5158	06S55365Y97	RES,RK 223J 1/10 -CP
R5159	06S55365Y97	RES,RK 223J 1/10 -CP
R5160	06S55365Y97	RES,RK 223J 1/10 -CP
R5162	06S55365Y89	RES,RK 103J 1/10 -CP
R5163	06S55365Y97	RES,RK 223J 1/10 -CP
R5164	06S55365Y97	RES,RK 223J 1/10 -CP
R6000	06S55365Y97	RES,RK 223J 1/10 -CP
R6001	06S55365Y81	RES,RK 472J 1/10 -CP
R6002	06S55365Y85	RES,RK 682J 1/10 -CP
R6003	06S55365Y81	RES,RK 472J 1/10 -CP
R6004	06S55365Y97	RES,RK 223J 1/10 -CP
R6005	06S55361Y17	RES,RK 10RJ 1/4 -CP
R6006	06S55361Y46	RES,RK 161J 1/4 -CP
R6007	06S55361Y46	RES,RK 161J 1/4 -CP
R6008	06S55361Y46	RES,RK 161J 1/4 -CP
R6009	06S55361Y46	RES,RK 161J 1/4 -CP
R6010	06S55365Y73	RES,RK 222J 1/10 -CP
R6011	06S55365Y69	RES,RK 152J 1/10 -CP
R6012	06S55365Y69	RES,RK 152J 1/10 -CP
R6013	06S55365Y73	RES,RK 222J 1/10 -CP
R6014	06S55365Y65	RES,RK 102J 1/10 -CP
R6015	06S55365Y81	RES,RK 472J 1/10 -CP
R6016	06S55365Y81	RES,RK 472J 1/10 -CP
R6017	06S55365Y81	RES,RK 472J 1/10 -CP
R6018	06S55361Y17	RES,RK 10RJ 1/4 -CP
R6505	06S55361Y65	RES,RK 102J 1/4 -CP
R6506	06S55361Y65	RES,RK 102J 1/4 -CP
R6507	06S55361Y65	RES,RK 102J 1/4 -CP
R6508	06S55366Y14	RES,RK 104J 1/10 -CP
R6509	06S55365Y97	RES,RK 223J 1/10 -CP
RA5007	06S45591W07	RES,ARY MNR101J 4-CP
RA5008	06S45591W07	RES,ARY MNR101J 4-CP
RA5010	06S45591W07	RES,ARY MNR101J 4-CP
RA5015	06S45591W07	RES,ARY MNR101J 4-CP
RA6001	06S45591W15	RES,ARY MNR472J 4-CP
SA1001	48T81909F01	PTT,DSP-201M -A1
SA4001	48T25171Y02	VST,SA-C2012-101 -CP
SA4501	48T25171Y02	VST,SA-C2012-101 -CP
SA4502	48T25171Y02	VST,SA-C2012-101 -CP
SA4503	48T25171Y02	VST,SA-C2012-101 -CP
SW2100	40T45282W02	SW,SLIDE SLD-42-508X
TH5001	48T25250Y06	TMT,ERTJ1VR223G -CP
VT1001	24T35286Y02	IND,MG56 332J -DB
XL5002	91T95084W10	XTL,CS20 5.000M -E9
XL6000	91T95084W08	XTL,CS20 4.00000M-E9
ZD1101	48-01607Z19	DIO,ZEN LUDZ5.6B -CP

ZD1102	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD1201	48T15541Y57	DIO,ZEN MAZS0680L-CP
ZD3000	48T25064Y02	DIO,ZEN ZSH5MA27A-ED
ZD3301	48T15541Y39	DIO,ZEN MAZS0360H-CP
ZD3302	48T15541Y39	DIO,ZEN MAZS0360H-CP
ZD3303	48T15541Y39	DIO,ZEN MAZS0360H-CP
ZD4502	48-02645Z09	DIO,ZEN MAZ80360L-CP
ZD6000	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD6001	48T35392Y06	DIO,ZEN RLZ7.5A -CP
ZD6002	48T35392Y06	DIO,ZEN RLZ7.5A -CP
ZD6501	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD6502	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD6503	48-01607Z19	DIO,ZEN LUDZ5.6B -CP

=======MONITOR P.W.Board

C8001	08S45676W85	CAP,CER 104K-B1C -CP
C8002	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8003	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8004	08S45676W85	CAP,CER 104K-B1C -CP
C8005	08S45677W60	CAP,CER 102J-CH1H-CP
C8006	08S45676W85	CAP,CER 104K-B1C -CP
C8007	08S35374W11	CAP,CER 475K-B0J -CP
C8008	08S45677W60	CAP,CER 102J-CH1H-CP
C8009	08S45677W60	CAP,CER 102J-CH1H-CP
C8010	08S45677W09	CAP,CER 7R0D-CH1H-CP
C8011	08S45677W18	CAP,CER.18RJ-CH1H-CP
C8012	08S45677W10	CAP,CER 8R0D-CH1H-CP
C8013	08S45677W20	CAP,CER.22RJ-CH1H-CP
C8014	08S45676W73	CAP,CER.103K-B1H -CP
C8015	08S45676W73	CAP,CER.103K-B1H -CP
C8016	08S45676W85	CAP,CER 104K-B1C -CP
C8017	08S45676W85	CAP,CER 104K-B1C -CP
C8018	08S45676W73	CAP,CER.103K-B1H -CP
C8101	08S45676W85	CAP,CER 104K-B1C -CP
C8102	08S45677W60	CAP,CER 102J-CH1H-CP
C8103	08S45677W60	CAP,CER 102J-CH1H-CP
C8201	08S60102F48	CAP,CER 105K-B1E -CP
C8202	08S65670Y01	CAP,CER 106KX5R1C-CP
C8203	08S65670Y01	CAP,CER 106KX5R1C-CP
C8204	08S65670Y01	CAP,CER 106KX5R1C-CP
C8205	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8206	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8207	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8208	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8209	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8210	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8211	08S45677W18	CAP,CER.18RJ-CH1H-CP
C8212	08S45677W18	CAP,CER.18RJ-CH1H-CP
C8213	08S45677W18	CAP,CER.18RJ-CH1H-CP
C8301	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8302	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8303	08S35349Y16	CAP,CER 105K-B1A -CP
C8304	08S45676W85	CAP,CER 104K-B1C -CP
C8305	08S45676W73	CAP,CER.103K-B1H -CP
C8306	08S45676W73	CAP,CER.103K-B1H -CP
C8307	08S45676W73	CAP,CER.103K-B1H -CP
C8308	08S45676W73	CAP,CER.103K-B1H -CP

C8309	08S45676W73	CAP,CER.103K-B1H -CP
C8310	08S45676W73	CAP,CER.103K-B1H -CP
C8311	08S35349Y16	CAP,CER 105K-B1A -CP
C8312	08T81833F10	CAP,CER 106K-B0J -CP
C8313	08S45677W36	CAP,CER.101J-CH1H-CP
C8314	08S65670Y01	CAP,CER 106KX5R1C-CP
C8316	08S65670Y01	CAP,CER 106KX5R1C-CP
C8318	08S35349Y16	CAP,CER 105K-B1A -CP
C8319	08S45677W10	CAP,CER 8R0D-CH1H-CP
C8322	08S45676W71	CAP,CER.682K-B1H -CP
C8323	08S45676W85	CAP,CER 104K-B1C -CP
C8324	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8325	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8326	08S45676W85	CAP,CER 104K-B1C -CP
C8327	08S45676W73	CAP,CER.103K-B1H -CP
C8328	08S35349Y15	CAP,CER 474K-B1A -CP
C8329	08S45677W10	CAP,CER 8R0D-CH1H-CP
C8330	08S45676W73	CAP,CER.103K-B1H -CP
C8334	08S65670Y01	CAP,CER 106KX5R1C-CP
C8336	08S65670Y01	CAP,CER 106KX5R1C-CP
C8337	08S65670Y01	CAP,CER 106KX5R1C-CP
C8338	08S45676W80	CAP,CER 223K-B1E -CP
C8339	08S45676W85	CAP,CER 104K-B1C -CP
C8340	08S45676W80	CAP,CER 223K-B1E -CP
C8341	08T81833F10	CAP,CER 106K-B0J -CP
C8401	08S45677W36	CAP,CER.101J-CH1H-CP
C8402	08S45677W36	CAP,CER.101J-CH1H-CP
C8403	08S45677W36	CAP,CER.101J-CH1H-CP
C8404	08S45677W36	CAP,CER.101J-CH1H-CP
C8405	08S45677W60	CAP,CER 102J-CH1H-CP
C8406	08S45676W80	CAP,CER 223K-B1E -CP
C8407	08S45677W15	CAP,CER 13RJ-CH1H-CP
C8408	08S45676W80	CAP,CER 223K-B1E -CP
C8409	08S45676W80	CAP,CER 223K-B1E -CP
C8410	08S45677W15	CAP,CER 13RJ-CH1H-CP
C8411	08S45676W80	CAP,CER 223K-B1E -CP
C8412	08S45676W80	CAP,CER 223K-B1E -CP
C8413	08S45676W80	CAP,CER 223K-B1E -CP
C8414	08S60102F48	CAP,CER 105K-B1E -CP
C8415	08S45676W85	CAP,CER 104K-B1C -CP
C8416	08S45676W80	CAP,CER 223K-B1E -CP
C8417	08S45676W80	CAP,CER 223K-B1E -CP
C8419	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8421	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8423	08T65555Y01	CAP,CER 226K-BJ0J-CP
C8502	08S45676W80	CAP,CER 223K-B1E -CP
C8503	08S45677W52	CAP,CER 471J-CH1H-CP
C8504	08S45676W85	CAP,CER 104K-B1C -CP
C8505	08S45677W34	CAP,CER.82RJ-CH1H-CP
C8506	08S45677W60	CAP,CER 102J-CH1H-CP
C8507	08S45677W60	CAP,CER 102J-CH1H-CP
C8508	08S45677W60	CAP,CER 102J-CH1H-CP
C8509	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8510	08S65667Y01	CAP,CER 224KX5R1C-CP
C8511	08S45676W85	CAP,CER 104K-B1C -CP
C8512	08S45676W85	CAP,CER 104K-B1C -CP
C8513	08S45676W80	CAP,CER 223K-B1E -CP

C8514	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8515	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8516	08S65670Y01	CAP,CER 106KX5R1C-CP
C8517	08S45676W85	CAP,CER 104K-B1C -CP
C8518	08S35349Y16	CAP,CER 105K-B1A -CP
C8519	08S45676W80	CAP,CER 223K-B1E -CP
C8520	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8521	08S35349Y16	CAP,CER 105K-B1A -CP
C8522	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8523	08S45677W60	CAP,CER 102J-CH1H-CP
C8525	08S45676W85	CAP,CER 104K-B1C -CP
C8526	08S45677W54	CAP,CER 561J-CH1H-CP
C8527	08S45676W85	CAP,CER 104K-B1C -CP
C8528	08S45676W85	CAP,CER 104K-B1C -CP
C8529	08S45677W60	CAP,CER 102J-CH1H-CP
C8530	08S45677W36	CAP,CER.101J-CH1H-CP
C8531	08S45677W48	CAP,CER.331J-CH1H-CP
C8532	08S45677W44	CAP,CER.221J-CH1H-CP
C8601	08S65128F88	CAP,CER 104K-B1H -CP
C8602	08S65670Y01	CAP,CER 106KX5R1C-CP
C8603	08S65670Y01	CAP,CER 106KX5R1C-CP
C8604	08S45676W80	CAP,CER 223K-B1E -CP
C8605	08S65670Y01	CAP,CER 106KX5R1C-CP
C8606	08S65670Y01	CAP,CER 106KX5R1C-CP
C8607	08S65667Y05	CAP,CER 105KX5R1A-CP
C8608	08S35350Y04	CAP,CER 105K-B1C -CP
C8609	08S65670Y01	CAP,CER 106KX5R1C-CP
C8612	08S65670Y01	CAP,CER 106KX5R1C-CP
C8613	08S45676W80	CAP,CER 223K-B1E -CP
C8614	08S65670Y01	CAP,CER 106KX5R1C-CP
C8615	08S65670Y01	CAP,CER 106KX5R1C-CP
C8616	08S45676W80	CAP,CER 223K-B1E -CP
C8617	08S65670Y01	CAP,CER 106KX5R1C-CP
C8701	08S35374W07	CAP,CER 334K-B1C -CP
C8702	08S65128F88	CAP,CER 104K-B1H -CP
C8703	08S45676W80	CAP,CER 223K-B1E -CP
C8704	08S65670Y01	CAP,CER 106KX5R1C-CP
C8705	08S65670Y01	CAP,CER 106KX5R1C-CP
C8706	08S65667Y05	CAP,CER 105KX5R1A-CP
C8707	08S65670Y01	CAP,CER 106KX5R1C-CP
C8708	08S45676W80	CAP,CER 223K-B1E -CP
C8709	08S35374W07	CAP,CER 334K-B1C -CP
C8710	08S45676W73	CAP,CER.103K-B1H -CP
C8711	08S45676W80	CAP,CER 223K-B1E -CP
C8712	08S65670Y01	CAP,CER 106KX5R1C-CP
C8713	08S65670Y01	CAP,CER 106KX5R1C-CP
C8714	08S45676W85	CAP,CER 104K-B1C -CP
C8715	08S45676W73	CAP,CER.103K-B1H -CP
C8716	08S45676W73	CAP,CER.103K-B1H -CP
C8717	08S65670Y01	CAP,CER 106KX5R1C-CP
C8718	08S35349Y17	CAP,CER 225K-B0J -CP
C8719	08S35374W08	CAP,CER 474K-B1C -CP
C8721	08S35349Y16	CAP,CER 105K-B1A -CP
C8722	08S45676W73	CAP,CER.103K-B1H -CP
C8723	08S45676W85	CAP,CER 104K-B1C -CP
C8724	08S45676W63	CAP,CER 152K-B1H -CP
C8725	08S45676W89	CAP,CER 473K-B1E -CP

C8726	08S45677W44	CAP,CER.221J-CH1H-CP
C8727	08S45676W89	CAP,CER 473K-B1E -CP
C8728	08S45676W73	CAP,CER.103K-B1H -CP
C8729	08S45676W85	CAP,CER 104K-B1C -CP
C8730	08S65670Y01	CAP,CER 106KX5R1C-CP
C8731	08S65670Y01	CAP,CER 106KX5R1C-CP
C8732	08S45676W73	CAP,CER.103K-B1H -CP
C8733	08S65676Y03	CAP,CER 225KX7R1C-CP
C8734	08S45677W60	CAP,CER 102J-CH1H-CP
C8735	08-02639Z06	CAP,CER 10RJ-CG3F-E1
C8736	08S65128F88	CAP,CER 104K-B1H -CP
C8737	08S65667Y05	CAP,CER 105KX5R1A-CP
C8738	08S65670Y01	CAP,CER 106KX5R1C-CP
C8740	08S45676W80	CAP,CER 223K-B1E -CP
C8741	08S65670Y01	CAP,CER 106KX5R1C-CP
C8742	08S65670Y01	CAP,CER 106KX5R1C-CP
CB8001	09T15548Y09	WTB,SM(9)B-SRSS -E7
CB8003	09T15108Y06	FFC,52746-0690 -E9
CB8101	09T55174Y04	FFC,IMSA9616S-04Y-E9
CB8201	09T15548Y02	WTB,SM(2)B-SRSS -E2
CB8301	09-04228Z08	FFC,IMSA9682S-35Y-ER
CB8302	09T15548Y05	WTB,SM(5)B-SRSS -E5
CB8601	09T45507Y32	FFC,IMSA9631S-32Y-ED
CB8701	09T85214W02	WTB,SM02(8)B-BHS -E9
D8001	48T45701Y01	DIO,MA2S728-TX -CP
D8002	48T45701Y01	DIO,MA2S728-TX -CP
D8101	48T85357W01	DIO,1PS226 -CP
D8102	48T85357W01	DIO,1PS226 -CP
D8201	48T25665Y01	DIO,1SS355-TE17 -CP
D8501	48T25665Y01	DIO,1SS355-TE17 -CP
D8701	48T25665Y01	DIO,1SS355-TE17 -CP
D8702	48T25665Y01	DIO,1SS355-TE17 -CP
D8703	48T25665Y01	DIO,1SS355-TE17 -CP
D8704	48T25665Y01	DIO,1SS355-TE17 -CP
D8705	48T45107W01	DIO,SI -DAN217 -CP
D8706	48T25665Y01	DIO,1SS355-TE17 -CP
D8707	48T25665Y01	DIO,1SS355-TE17 -CP
IC8001	51-05594Z01	IC,D703262YGC-315-QT
IC8301	51-02431Z01	RB5P0090M -QT
IC8302	51T25404Y02	TC7W53FU-TE12L -SE1
IC8303	51T25183Y02	TC7SET08FU-EL -CP
IC8401	51T65562Y05	LC74735NWH-8A04-E-QT
IC8502	51T35235Y01	TC7SET32FU-TE85L -CP
IC8503	51T45577Y01	LZ9GH29 -QT
IC8504	51T15194Y01	TC74VHCT08AFT-EL-SE5
IC8505	51T25491Y01	NJM2107F-TE1 -CP
IC8601	51-04428Z01	BD7800FP-E2 -NE5
IC8701	51T65666Y02	NJM2880U33-TE1 -NE2
IC8702	51-04428Z01	BD7800FP-E2 -NE5
IC8703	51T65666Y03	NJM2880U1-05-TE1-NE2
IC8704	51T93332F02	NJM2903V-TE2 -SE2
IC8705	51-02203Z01	OZ964ISN-L -SE5
IC8706	51-04428Z01	BD7800FP-E2 -NE5
IC8707	51T25183Y02	TC7SET08FU-EL -CP
L8301	24T95458W01	FBI,BLM31PG500SH1-CP
L8501	24S45108Y30	IND,MA1608 15RK -CP
L8502	24S45108Y21	IND,MA1608 2R7K -CP

L8601	24T25164Y18	IND,FSLM2520 2R7J-CP
Q8001	48T75205Y01	TR,FMC2A-T148 -CP
Q8002	48T75205Y01	TR,FMC2A-T148 -CP
Q8101	48T63420F03	TR,2SA1037AK-R146-CP
Q8102	48T63420F03	TR,2SA1037AK-R146-CP
Q8103	48T63420F03	TR,2SA1037AK-R146-CP
Q8104	48T63417F03	TR ,CP.C2412K-BR -96
Q8105	48T63417F03	TR ,CP.C2412K-BR -96
Q8201	48T94582F01	TR ,CP 2SC4081-Q
Q8202	48T55462Y02	TR,2SB1132-R-T100-E2
Q8203	48T94582F01	TR ,CP 2SC4081-Q
Q8204	48T94582F01	TR ,CP 2SC4081-Q
Q8205	48T94582F01	TR ,CP 2SC4081-Q
Q8206	48T94582F01	TR ,CP 2SC4081-Q
Q8207	48T94581F01	TR,2SA1576A-T106 -CP
Q8208	48T94581F01	TR,2SA1576A-T106 -CP
Q8209	48T94581F01	TR,2SA1576A-T106 -CP
Q8210	48T94581F01	TR,2SA1576A-T106 -CP
Q8211	48T94582F01	TR ,CP 2SC4081-Q
Q8212	48T94582F01	TR ,CP 2SC4081-Q
Q8213	48T94582F01	TR ,CP 2SC4081-Q
Q8214	48T94582F01	TR ,CP 2SC4081-Q
Q8215	48T94606F05	TR,DTC114TUA-T106-CP
Q8216	48T94606F04	TR,DTC143TUA-T106-CP
Q8217	48T94606F04	TR,DTC143TUA-T106-CP
Q8218	48T94606F04	TR,DTC143TUA-T106-CP
Q8219	48T94606F04	TR,DTC143TUA-T106-CP
Q8303	48T63417F03	TR ,CP.C2412K-BR -96
Q8304	48T94606F53	TR,DTA124EUA-T106-CP
Q8501	48T94606F05	TR,DTC114TUA-T106-CP
Q8502	48T63461F03	TR,CP.2SC2411K-CQ-96
Q8601	48T75205Y01	TR,FMC2A-T148 -CP
Q8602	48T75011W01	TR,2SD1782K-PQR-6-CP
Q8603	48T75205Y01	TR,FMC2A-T148 -CP
Q8701	48T94582F01	TR ,CP 2SC4081-Q
Q8702	48T62967F02	TR,DTC114EKA-T146-CP
Q8703	48T75460Y01	FET,SP8M3-TB -E2
Q8704	48T75460Y01	FET,SP8M3-TB -E2
R8001	06S55365Y57	RES,RK 471J 1/10 -CP
R8002	06S55365Y41	RES,RK 101J 1/10 -CP
R8003	06S55365Y41	RES,RK 101J 1/10 -CP
R8007	06S55365Y41	RES,RK 101J 1/10 -CP
R8010	06S55365Y41	RES,RK 101J 1/10 -CP
R8011	06S55365Y41	RES,RK 101J 1/10 -CP
R8012	06S55365Y41	RES,RK 101J 1/10 -CP
R8013	06S55365Y41	RES,RK 101J 1/10 -CP
R8014	06S55365Y41	RES,RK 101J 1/10 -CP
R8015	06S55365Y41	RES,RK 101J 1/10 -CP
R8016	06S55366Y06	RES,RK 473J 1/10 -CP
R8017	06S55365Y41	RES,RK 101J 1/10 -CP
R8018	06S55365Y41	RES,RK 101J 1/10 -CP
R8019	06S55365Y41	RES,RK 101J 1/10 -CP
R8020	06S55365Y41	RES,RK 101J 1/10 -CP
R8032	06S55365Y41	RES,RK 101J 1/10 -CP
R8034	06S55365Y41	RES,RK 101J 1/10 -CP
R8036	06S55365Y41	RES,RK 101J 1/10 -CP
R8037	06S55365Y41	RES,RK 101J 1/10 -CP

R8039	06S55365Y41	RES,RK 101J 1/10 -CP
R8040	06S55365Y41	RES,RK 101J 1/10 -CP
R8041	06S55365Y41	RES,RK 101J 1/10 -CP
R8042	06S55365Y41	RES,RK 101J 1/10 -CP
R8043	06S55365Y41	RES,RK 101J 1/10 -CP
R8044	06S55365Y41	RES,RK 101J 1/10 -CP
R8045	06S55365Y41	RES,RK 101J 1/10 -CP
R8046	06S55365Y41	RES,RK 101J 1/10 -CP
R8048	06S55365Y41	RES,RK 101J 1/10 -CP
R8049	06S55365Y57	RES,RK 471J 1/10 -CP
R8050	06S55365Y97	RES,RK 223J 1/10 -CP
R8051	06S55365Y57	RES,RK 471J 1/10 -CP
R8052	06S55365Y99	RES,RK 273J 1/10 -CP
R8056	06S55365Y41	RES,RK 101J 1/10 -CP
R8058	06S55365Y57	RES,RK 471J 1/10 -CP
R8059	06S55365Y57	RES,RK 471J 1/10 -CP
R8061	06S55365Y97	RES,RK 223J 1/10 -CP
R8062	06S55365Y97	RES,RK 223J 1/10 -CP
R8101	06S15593Y25	RES,RK 101F 1/10 -CP
R8102	06S15593Y25	RES,RK 101F 1/10 -CP
R8103	06S35083Y29	RES,RK 222F 1/4 -CP
R8104	06S35083Y29	RES,RK 222F 1/4 -CP
R8105	06S15593Y97	RES,RK 104F 1/10 -CP
R8106	06S15593Y01	RES,RK 10RF 1/10 -CP
R8107	06S15593Y09	RES,RK 22RF 1/10 -CP
R8108	06S15593Y97	RES,RK 104F 1/10 -CP
R8109	06S15593Y57	RES,RK 222F 1/10 -CP
R8110	06S55365Y89	RES,RK 103J 1/10 -CP
R8111	06S15593Y65	RES,RK 472F 1/10 -CP
R8112	06S55365Y89	RES,RK 103J 1/10 -CP
R8113	06S15593Y57	RES,RK 222F 1/10 -CP
R8114	06S55365Y98	RES,RK 243J 1/10 -CP
R8115	06S15593Y73	RES,RK 103F 1/10 -CP
R8116	06S55365Y98	RES,RK 243J 1/10 -CP
R8117	06S15593Y65	RES,RK 472F 1/10 -CP
R8118	06S55365Y98	RES,RK 243J 1/10 -CP
R8201	06S55365Y81	RES,RK 472J 1/10 -CP
R8202	06S55365Y98	RES,RK 243J 1/10 -CP
R8203	06S55366Y06	RES,RK 473J 1/10 -CP
R8204	06S55365Y53	RES,RK 331J 1/10 -CP
R8205	06S15593Y81	RES,RK 223F 1/10 -CP
R8206	06S15593Y79	RES,RK 183F 1/10 -CP
R8207	06S15593Y89	RES,RK 473F 1/10 -CP
R8208	06S15593Y81	RES,RK 223F 1/10 -CP
R8209	06S15593Y79	RES,RK 183F 1/10 -CP
R8210	06S15593Y89	RES,RK 473F 1/10 -CP
R8211	06S15593Y81	RES,RK 223F 1/10 -CP
R8212	06S15593Y79	RES,RK 183F 1/10 -CP
R8213	06S15593Y89	RES,RK 473F 1/10 -CP
R8214	06S15593Y81	RES,RK 223F 1/10 -CP
R8215	06S15593Y87	RES,RK 393F 1/10 -CP
R8216	06S15593Y41	RES,RK 471F 1/10 -CP
R8217	06S15593Y47	RES,RK 821F 1/10 -CP
R8218	06S15593Y41	RES,RK 471F 1/10 -CP
R8219	06S15593Y47	RES,RK 821F 1/10 -CP
R8220	06S15593Y41	RES,RK 471F 1/10 -CP
R8221	06S15593Y47	RES,RK 821F 1/10 -CP

R8222	06S15593Y53	RES,RK 152F 1/10 -CP
R8223	06S15593Y55	RES,RK 182F 1/10 -CP
R8224	06S15594Y04	RES,RK 184F 1/10 -CP
R8225	06S15594Y04	RES,RK 184F 1/10 -CP
R8226	06S15594Y04	RES,RK 184F 1/10 -CP
R8227	06S15593Y42	RES,RK 511F 1/10 -CP
R8228	06S15593Y49	RES,RK 102F 1/10 -CP
R8229	06S15593Y42	RES,RK 511F 1/10 -CP
R8230	06S15593Y49	RES,RK 102F 1/10 -CP
R8231	06S15593Y42	RES,RK 511F 1/10 -CP
R8232	06S15593Y49	RES,RK 102F 1/10 -CP
R8233	06S15593Y51	RES,RK 122F 1/10 -CP
R8234	06S15593Y56	RES,RK 202F 1/10 -CP
R8235	06S15593Y25	RES,RK 101F 1/10 -CP
R8236	06S15593Y25	RES,RK 101F 1/10 -CP
R8237	06S15593Y25	RES,RK 101F 1/10 -CP
R8238	06S15593Y25	RES,RK 101F 1/10 -CP
R8239	06S15593Y53	RES,RK 152F 1/10 -CP
R8240	06S15593Y53	RES,RK 152F 1/10 -CP
R8241	06S15593Y53	RES,RK 152F 1/10 -CP
R8242	06S15593Y49	RES,RK 102F 1/10 -CP
R8243	06S55365Y81	RES,RK 472J 1/10 -CP
R8244	06S55365Y77	RES,RK 332J 1/10 -CP
R8245	06S55365Y77	RES,RK 332J 1/10 -CP
R8246	06S55365Y77	RES,RK 332J 1/10 -CP
R8247	06S55365Y71	RES,RK 182J 1/10 -CP
R8301	06S55365Y65	RES,RK 102J 1/10 -CP
R8302	06S55365Y41	RES,RK 101J 1/10 -CP
R8303	06S55365Y65	RES,RK 102J 1/10 -CP
R8304	06S15593Y79	RES,RK 183F 1/10 -CP
R8305	06S55365Y65	RES,RK 102J 1/10 -CP
R8306	06S55365Y65	RES,RK 102J 1/10 -CP
R8307	06S55365Y51	RES,RK 271J 1/10 -CP
R8308	06S55365Y59	RES,RK 561J 1/10 -CP
R8309	06S55365Y47	RES,RK 181J 1/10 -CP
R8310	06S55365Y49	RES,RK 221J 1/10 -CP
R8311	06S55361Y30	RES,RK 36RJ 1/4 -CP
R8312	06S55361Y31	RES,RK 39RJ 1/4 -CP
R8313	06S55365Y41	RES,RK 101J 1/10 -CP
R8314	06S55365Y61	RES,RK 681J 1/10 -CP
R8315	06S55366Y38	RES,RK 105J 1/10 -CP
R8316	06S55365Y73	RES,RK 222J 1/10 -CP
R8319	06S55366Y38	RES,RK 105J 1/10 -CP
R8320	06S55365Y41	RES,RK 101J 1/10 -CP
R8321	06S55365Y41	RES,RK 101J 1/10 -CP
R8322	06S55365Y41	RES,RK 101J 1/10 -CP
R8323	06S55365Y89	RES,RK 103J 1/10 -CP
R8324	06S55365Y83	RES,RK 562J 1/10 -CP
R8327	06S55365Y87	RES,RK 822J 1/10 -CP
R8328	06S55365Y65	RES,RK 102J 1/10 -CP
R8329	06S55365Y67	RES,RK 122J 1/10 -CP
R8330	06S55365Y71	RES,RK 182J 1/10 -CP
R8331	06S55365Y65	RES,RK 102J 1/10 -CP
R8332	06S55365Y65	RES,RK 102J 1/10 -CP
R8333	06S55366Y06	RES,RK 473J 1/10 -CP
R8334	06S55366Y06	RES,RK 473J 1/10 -CP
R8335	06S55365Y65	RES,RK 102J 1/10 -CP

R8404	06S55366Y39	RES,RK JUMPER1/10-CP
R8405	06S55366Y39	RES,RK JUMPER1/10-CP
R8406	06S55366Y39	RES,RK JUMPER1/10-CP
R8407	06S55365Y41	RES,RK 101J 1/10 -CP
R8408	06S55365Y41	RES,RK 101J 1/10 -CP
R8409	06S55365Y41	RES,RK 101J 1/10 -CP
R8411	06S55365Y41	RES,RK 101J 1/10 -CP
R8420	06S55366Y39	RES,RK JUMPER1/10-CP
R8421	06S55365Y74	RES,RK 242J 1/10 -CP
R8422	06S55365Y49	RES,RK 221J 1/10 -CP
R8423	06S55365Y49	RES,RK 221J 1/10 -CP
R8424	06S55365Y49	RES,RK 221J 1/10 -CP
R8502	06S55365Y89	RES,RK 103J 1/10 -CP
R8504	06S55365Y41	RES,RK 101J 1/10 -CP
R8506	06S55365Y89	RES,RK 103J 1/10 -CP
R8507	06S55365Y41	RES,RK 101J 1/10 -CP
R8508	06S55366Y06	RES,RK 473J 1/10 -CP
R8509	06S55365Y41	RES,RK 101J 1/10 -CP
R8510	06S55365Y41	RES,RK 101J 1/10 -CP
R8511	06S55365Y41	RES,RK 101J 1/10 -CP
R8512	06S55365Y41	RES,RK 101J 1/10 -CP
R8513	06S55365Y97	RES,RK 223J 1/10 -CP
R8514	06S55365Y41	RES,RK 101J 1/10 -CP
R8515	06S55366Y22	RES,RK 224J 1/10 -CP
R8516	06S55365Y41	RES,RK 101J 1/10 -CP
R8517	06S55366Y38	RES,RK 105J 1/10 -CP
R8518	06S55366Y06	RES,RK 473J 1/10 -CP
R8519	06S55365Y98	RES,RK 243J 1/10 -CP
R8520	06S55365Y55	RES,RK 391J 1/10 -CP
R8521	06S55365Y78	RES,RK 362J 1/10 -CP
R8522	06S55366Y10	RES,RK 683J 1/10 -CP
R8523	06S55365Y83	RES,RK 562J 1/10 -CP
R8524	06S55366Y39	RES,RK JUMPER1/10-CP
R8525	06S55366Y10	RES,RK 683J 1/10 -CP
R8526	06S55366Y32	RES,RK 564J 1/10 -CP
R8527	06S55366Y32	RES,RK 564J 1/10 -CP
R8528	06S55366Y38	RES,RK 105J 1/10 -CP
R8529	06S55365Y95	RES,RK 183J 1/10 -CP
R8530	06S55365Y77	RES,RK 332J 1/10 -CP
R8531	06S55365Y73	RES,RK 222J 1/10 -CP
R8532	06S55365Y81	RES,RK 472J 1/10 -CP
R8533	06S55365Y75	RES,RK 272J 1/10 -CP
R8534	06S55365Y77	RES,RK 332J 1/10 -CP
R8535	06S55365Y53	RES,RK 331J 1/10 -CP
R8536	06S55365Y41	RES,RK 101J 1/10 -CP
R8601	06S55365Y97	RES,RK 223J 1/10 -CP
R8602	06S55362Y06	RES,RK 473J 1/4 -CP
R8603	06S55366Y39	RES,RK JUMPER1/10-CP
R8604	06S55365Y37	RES,RK 68RJ 1/10 -CP
R8605	06S15593Y84	RES,RK 303F 1/10 -CP
R8606	06S15593Y79	RES,RK 183F 1/10 -CP
R8608	06S15593Y73	RES,RK 103F 1/10 -CP
R8609	06S15593Y65	RES,RK 472F 1/10 -CP
R8610	06S15593Y68	RES,RK 622F 1/10 -CP
R8611	06S15593Y81	RES,RK 223F 1/10 -CP
R8612	06S15594Y04	RES,RK 184F 1/10 -CP
R8613	06S15593Y65	RES,RK 472F 1/10 -CP

R8614	06S15593Y83	RES,RK 273F 1/10 -CP
R8701	06S15594Y04	RES,RK 184F 1/10 -CP
R8702	06S15593Y65	RES,RK 472F 1/10 -CP
R8703	06S15593Y83	RES,RK 273F 1/10 -CP
R8704	06S55361Y27	RES,RK 27RJ 1/4 -CP
R8705	06S55365Y96	RES,RK 203J 1/10 -CP
R8706	06S55365Y65	RES,RK 102J 1/10 -CP
R8707	06S55365Y89	RES,RK 103J 1/10 -CP
R8708	06S55365Y93	RES,RK 153J 1/10 -CP
R8709	06S55366Y14	RES,RK 104J 1/10 -CP
R8711	06S55365Y93	RES,RK 153J 1/10 -CP
R8714	06S55365Y25	RES,RK 22RJ 1/10 -CP
R8715	06S55365Y73	RES,RK 222J 1/10 -CP
R8716	06S55365Y98	RES,RK 243J 1/10 -CP
R8717	06S55365Y89	RES,RK 103J 1/10 -CP
R8721	06S15593Y87	RES,RK 393F 1/10 -CP
R8723	06S55366Y07	RES,RK 513J 1/10 -CP
R8725	06S15593Y90	RES,RK 513F 1/10 -CP
R8726	06S15593Y81	RES,RK 223F 1/10 -CP
R8727	06S55365Y89	RES,RK 103J 1/10 -CP
R8728	06S55365Y89	RES,RK 103J 1/10 -CP
R8729	06S55366Y38	RES,RK 105J 1/10 -CP
R8730	06S15593Y61	RES,RK 332F 1/10 -CP
R8731	06S55366Y39	RES,RK JUMPER1/10-CP
R8732	06S15593Y40	RES,RK 431F 1/10 -CP
R8733	06S15594Y08	RES,RK 274F 1/10 -CP
R8734	06S15593Y58	RES,RK 242F 1/10 -CP
R8735	06S15593Y84	RES,RK 303F 1/10 -CP
R8736	06S15593Y97	RES,RK 104F 1/10 -CP
R8737	06S15593Y77	RES,RK 153F 1/10 -CP
R8738	06S15593Y53	RES,RK 152F 1/10 -CP
R8739	06S55365Y98	RES,RK 243J 1/10 -CP
R8740	06S55366Y14	RES,RK 104J 1/10 -CP
R8741	06S55365Y82	RES,RK 512J 1/10 -CP
RA8001	06S45591W15	RES,ARY MNR472J 4-CP
RA8501	06S45591W07	RES,ARY MNR101J 4-CP
RA8502	06S45591W07	RES,ARY MNR101J 4-CP
SD8501	48T25247Y01	DIO,SHT MA716-TX -CP
T8701	25-01508Z02	TRANS,CIU98 -T
TH8701	48T25250Y06	TMT,ERTJ1VR223G -CP
VD8501	48T25248Y01	DIO,VAR MA335-TX -CP
VR8501	18T25572Y19	VAR,RH03ADC 104-X-CP
VR8502	18T25572Y09	VAR,RH03ADC 222-X-CP
VT8401	24-07489Z01	COIL,VTR 5CDM -E2
XL8001	91T75391Y01	XTL,CM130 32.768K-E5
XL8002	91T95084W27	XTL,CS20 4.9152M -E9
XL8301	91T95084W13	XTL,CS20 4.43361M-E9
XL8302	91T95084W11	XTL,CS20 3.57954M-E9
Z8401	91T25741Y03	EMI,CNF20R102S -CP
Z8402	91T25741Y03	EMI,CNF20R102S -CP
Z8403	91T25741Y03	EMI,CNF20R102S -CP
ZD8301	48-01607Z16	DIO,ZEN LUDZ5.1B -CP
ZD8501	48-01607Z37	DIO,ZEN LUDZ10B -CP
ZD8701	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD8702	48-01607Z19	DIO,ZEN LUDZ5.6B -CP

=======DF P.W.Board

C4501	08S45676W80	CAP,CER 223K-B1E -CP
C4520	08S35374W12	CAP,CER 106K-B0J -CP
C4530	08S45676W94	CAP,CER 563K-B1C -CP
C4531	08S35349Y12	CAP,CER 105K-B0J -CP
IC4520	51T55628Y01	RS-671 -NE2
IC4530	51T55185Y02	TPS850 -CP
LD4540	48T15521Y02	LED,RED SML-310LT-CP
LD4550	48T15521Y02	LED,RED SML-310LT-CP
LD4580	48-01404Z01	LED,BLU SML512BC4TCP
LD4581	48-01404Z01	LED,BLU SML512BC4TCP
LD4582	48T15521Y07	LED,GRN 310PT-KL -CP
LD4583	48T15521Y07	LED,GRN 310PT-KL -CP
LD4584	48T15521Y07	LED,GRN 310PT-KL -CP
LD4585	48T15521Y07	LED,GRN 310PT-KL -CP
LD4586	48T15521Y07	LED,GRN 310PT-KL -CP
LD4587	48T15521Y07	LED,GRN 310PT-KL -CP
LD4588	48T15521Y07	LED,GRN 310PT-KL -CP
LD4589	48T15521Y07	LED,GRN 310PT-KL -CP
LD4590	48T15521Y07	LED,GRN 310PT-KL -CP
Q4540	48T63417F01	TR ,CP.2SC2412K -96
Q4550	48T63417F01	TR ,CP.2SC2412K -96
Q4580	48T63788F01	TR ,CP.2SD1328 -TX
R4501	06S55363Y91	RES,RK 123J 1/8 -CP
R4510	06S15593Y84	RES,RK 303F 1/10 -CP
R4511	06S15593Y73	RES,RK 103F 1/10 -CP
R4512	06S15593Y66	RES,RK 512F 1/10 -CP
R4513	06S15593Y60	RES,RK 302F 1/10 -CP
R4514	06S45348Y04	RES,RK 202F 1/4 -CP
R4520	06S55361Y33	RES,RK 47RJ 1/4 -CP
R4521	06S55361Y65	RES,RK 102J 1/4 -CP
R4530	06S55361Y33	RES,RK 47RJ 1/4 -CP
R4531	06S15594Y10	RES,RK 334F 1/10 -CP
R4532	06S55361Y65	RES,RK 102J 1/4 -CP
R4540	06S55361Y87	RES,RK 822J 1/4 -CP
R4541	06S64995F61	RES,RK 222J 1/8 -CP
R4542	06S45674W69	RES,RK 332J 1/10 -CP
R4550	06S55361Y87	RES,RK 822J 1/4 -CP
R4551	06S64995F61	RES,RK 222J 1/8 -CP
R4552	06S45674W69	RES,RK 332J 1/10 -CP
R4580	06S55363Y69	RES,RK 152J 1/8 -CP
R4581	06S55363Y51	RES,RK 271J 1/8 -CP
R4582	06S64995F47	RES,RK 561J 1/8 -CP
R4583	06S55363Y51	RES,RK 271J 1/8 -CP
R4584	06S55363Y51	RES,RK 271J 1/8 -CP
R4585	06S55361Y55	RES,RK 391J 1/4 -CP
R4586	06S55363Y51	RES,RK 271J 1/8 -CP
SW4511	40T65353Y01	SW,TACT SKRPACE010E2
SW4512	40T65353Y01	SW,TACT SKRPACE010E2
SW4513	40T65353Y01	SW,TACT SKRPACE010E2
SW4514	40T65353Y01	SW,TACT SKRPACE010E2
SW4515	40T65353Y01	SW,TACT SKRPACE010E2
SW4516	40T65353Y01	SW,TACT SKRPACE010E2
ZD4500	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD4580	48-01607Z25	DIO,ZEN LUDZ6.8B -CP
ZD4581	48-01607Z25	DIO,ZEN LUDZ6.8B -CP
ZD4582	48-01607Z25	DIO,ZEN LUDZ6.8B -CP

ZD4583	48-01607Z25	DIO,ZEN LUDZ6.8B -CP
ZD4584	48-01607Z25	DIO,ZEN LUDZ6.8B -CP
ZD4585	48-01607Z25	DIO,ZEN LUDZ6.8B -CP

=======ESC P.W.Board

CB4701	09T15536Y20	FFC,FH12-20S-0.5S-E9
D4701	48T85357W01	DIO,1PS226 -CP
D4702	48T85357W01	DIO,1PS226 -CP
D4703	48T85357W01	DIO,1PS226 -CP
D4704	48T85357W01	DIO,1PS226 -CP
R4701	06S45675W43	RES,RK JUMPER1/10-CP
R4702	06S64995F57	RES,RK 152J 1/8 -CP
R4703	06S64995F53	RES,RK 102J 1/8 -CP
R4704	06S64995F57	RES,RK 152J 1/8 -CP
R4705	06S64995F53	RES,RK 102J 1/8 -CP
R4706	06S64995F29	RES,RK 101J 1/8 -CP
R4707	06S64995F53	RES,RK 102J 1/8 -CP
R4709	06S64995F53	RES,RK 102J 1/8 -CP
R4710	06S64995F53	RES,RK 102J 1/8 -CP
R4711	06S64995F29	RES,RK 101J 1/8 -CP
R4712	06S64995F53	RES,RK 102J 1/8 -CP
ZD4701	48-01607Z19	DIO,ZEN LUDZ5.6B -CP
ZD4702	48T15541Y57	DIO,ZEN MAZS0680L-CP

=======GRIDE P.W.Board

C4801	08S45676W80	CAP,CER 223K-B1E -CP
CB4801	09T15107Y06	FFC,52745-0690 -E9
LD4810	48-01404Z01	LED,BLU SML512BC4TCP
LD4811	48-01404Z01	LED,BLU SML512BC4TCP
LD4812	48-01404Z01	LED,BLU SML512BC4TCP
Q4810	48T63788F01	TR ,CP.2SD1328 -TX
R4810	06S55361Y53	RES,RK 331J 1/4 -CP
R4811	06S64995F61	RES,RK 222J 1/8 -CP
R4812	06S55361Y62	RES,RK 751J 1/4 -CP
ZD4810	48-01607Z25	DIO,ZEN LUDZ6.8B -CP
ZD4811	48-01607Z25	DIO,ZEN LUDZ6.8B -CP

=======OPT P.W.Board

C8801	08S65670Y01	CAP,CER 106KX5R1C-CP
C8802	08S45676W80	CAP,CER 223K-B1E -CP
C8803	08S45677W12	CAP,CER.10RD-CH1H-CP
CB8801	09T25286Y03	WTB,BM(03)B-SRSS -E3
R8801	06S55361Y87	RES,RK 822J 1/4 -CP
R8802	06S55365Y41	RES,RK 101J 1/10 -CP

=======MECH P.W.Board

CB8904	09T85454W05	WTB,53398-0590 -E9
CB8905	09T85454W02	WTB,53398-0290 -E6
CB8906	09T85454W02	WTB,53398-0290 -E6
CB8907	09T25286Y03	WTB,BM(03)B-SRSS -E3
CB8909	09T15189Y15	FFC,52559-1592 -E9
CH8904	01T65459Y01	ASSY,WIRE MECHA
CH8907	01T65458Y01	ASSY,WIRE PHOT
R8901	06S45674W49	RES,RK 471J 1/10 -CP
R8902	06S45674W97	RES,RK 473J 1/10 –CP

=======SENSOR P.W.Board		
CB8971	09T25286Y03	WTB,BM(03)B-SRSS -E3
PR8971	48T45008Y01	PHT,INT GP1S93 -DS
=======SWITCH P.W.Board		
CB8951	09T15548Y05	WTB,SM(5)B-SRSS -E5
=======DV-MAIN P.W.Board		
C501	08T81833F13	CAP,CER 106K-B1C -CP
C505	08T81833F13	CAP,CER 106K-B1C -CP
C601	08S45232Y05	CAP,CER 102K-B1H -CP
C602	08S45232Y05	CAP,CER 102K-B1H -CP
C603	08S45232Y05	CAP,CER 102K-B1H -CP
C604	08S45232Y05	CAP,CER 102K-B1H -CP
C605	08S45232Y05	CAP,CER 102K-B1H -CP
C606	08S45232Y05	CAP,CER 102K-B1H -CP
C607	08S45232Y05	CAP,CER 102K-B1H -CP
C608	08S45232Y05	CAP,CER 102K-B1H -CP
C609	08S45232Y05	CAP,CER 102K-B1H -CP
C610	08S45232Y05	CAP,CER 102K-B1H -CP
C611	08S45232Y05	CAP,CER 102K-B1H -CP
C612	08S45232Y05	CAP,CER 102K-B1H -CP
C613	08S45232Y05	CAP,CER 102K-B1H -CP
C614	08S45676W87	CAP,CER 333K-B1E -CP
C615	08S45232Y17	CAP,CER 104K-B0J -CP
C616	08S45232Y17	CAP,CER 104K-B0J -CP
C617	08S45232Y17	CAP,CER 104K-B0J -CP
C618	08S45676W70	CAP,CER 562K-B1H -CP
C619	08S45676W79	CAP,CER 183K-B1E -CP
C620	08S45232Y17	CAP,CER 104K-B0J -CP
C621	08S45232Y17	CAP,CER 104K-B0J -CP
C622	08S45232Y17	CAP,CER 104K-B0J -CP
C623	08S45232Y17	CAP,CER 104K-B0J -CP
C624	08S45232Y05	CAP,CER 102K-B1H -CP
C625	08S45232Y17	CAP,CER 104K-B0J -CP
C626	08S45232Y17	CAP,CER 104K-B0J -CP
C627	08S45232Y17	CAP,CER 104K-B0J -CP
C632	08S45232Y05	CAP,CER 102K-B1H -CP
C633	08S45232Y05	CAP,CER 102K-B1H -CP
C634	08S45232Y05	CAP,CER 102K-B1H -CP
C635	08S45232Y05	CAP,CER 102K-B1H -CP
C636	08S45232Y05	CAP,CER 102K-B1H -CP
C637	08S45232Y05	CAP,CER 102K-B1H -CP
C638	08S45232Y05	CAP,CER 102K-B1H -CP
C639	08S45232Y05	CAP,CER 102K-B1H -CP
C640	08S45232Y05	CAP,CER 102K-B1H -CP
C641	08S45232Y05	CAP,CER 102K-B1H -CP
C642	08S45232Y05	CAP,CER 102K-B1H -CP
C643	08S45232Y05	CAP,CER 102K-B1H -CP
C644	08S45232Y05	CAP,CER 102K-B1H -CP
C645	08S45232Y05	CAP,CER 102K-B1H -CP
C646	08S45232Y05	CAP,CER 102K-B1H -CP
C647	08S45232Y05	CAP,CER 102K-B1H -CP
C648	08S45232Y05	CAP,CER 102K-B1H -CP
C651	08S65670Y01	CAP,CER 106KX5R1C-CP
C652	08S65670Y01	CAP,CER 106KX5R1C-CP
C654	08S45232Y05	CAP,CER 102K-B1H -CP

C655	08S45232Y17	CAP,CER 104K-B0J -CP
C658	08S35374W12	CAP,CER 106K-B0J -CP
C671	08S45232Y11	CAP,CER 103K-B1C -CP
C672	08S45232Y17	CAP,CER 104K-B0J -CP
C673	08S45232Y17	CAP,CER 104K-B0J -CP
C674	08S45232Y17	CAP,CER 104K-B0J -CP
C675	08S45232Y17	CAP,CER 104K-B0J -CP
C676	08S45232Y17	CAP,CER 104K-B0J -CP
C677	08S45232Y17	CAP,CER 104K-B0J -CP
C678	08S45232Y09	CAP,CER 472K-B1E -CP
C679	08S45232Y17	CAP,CER 104K-B0J -CP
C680	08S35349Y16	CAP,CER 105K-B1A -CP
C681	08S35349Y16	CAP,CER 105K-B1A -CP
C682	08S45232Y17	CAP,CER 104K-B0J -CP
C683	08S45232Y17	CAP,CER 104K-B0J -CP
C684	08S45232Y17	CAP,CER 104K-B0J -CP
C685	08S45232Y17	CAP,CER 104K-B0J -CP
C688	08S45232Y07	CAP,CER 222K-B1H -CP
C689	08S45232Y07	CAP,CER 222K-B1H -CP
C690	08S45232Y11	CAP,CER 103K-B1C -CP
C691	08S45231Y13	CAP,CER 10RD-CH1H-CP
C692	08S45231Y19	CAP,CER 33RJ-CH1H-CP
C693	08S45231Y22	CAP,CER 56RJ-CH1H-CP
C694	08S45231Y19	CAP,CER 33RJ-CH1H-CP
C696	08S45231Y22	CAP,CER 56RJ-CH1H-CP
C721	08S45232Y17	CAP,CER 104K-B0J -CP
C725	08S45232Y17	CAP,CER 104K-B0J -CP
C732	08S45232Y05	CAP,CER 102K-B1H -CP
C733	08S45232Y17	CAP,CER 104K-B0J -CP
C734	08S45232Y05	CAP,CER 102K-B1H -CP
C735	08S45232Y05	CAP,CER 102K-B1H -CP
C736	08S45232Y17	CAP,CER 104K-B0J -CP
C737	08S45232Y17	CAP,CER 104K-B0J -CP
C738	08S45232Y05	CAP,CER 102K-B1H -CP
C739	08S45232Y05	CAP,CER 102K-B1H -CP
C801	08T65555Y01	CAP,CER 226K-BJ0J-CP
C802	08T65555Y01	CAP,CER 226K-BJ0J-CP
C804	08S45676W80	CAP,CER 223K-B1E -CP
C811	08T65555Y01	CAP,CER 226K-BJ0J-CP
C812	08T65555Y01	CAP,CER 226K-BJ0J-CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C821	08S45232Y13	CAP,CER 223K-B1C -CP
C831	08S45232Y13	CAP,CER 223K-B1C -CP
C841	08S45232Y17	CAP,CER 104K-B0J -CP
C842	08T65555Y01	CAP,CER 226K-BJ0J-CP
C843	08S45232Y17	CAP,CER 104K-B0J -CP
C844	08T65555Y01	CAP,CER 226K-BJ0J-CP
C845	08S45232Y17	CAP,CER 104K-B0J -CP
C846	08S45232Y17	CAP,CER 104K-B0J -CP
C850	08S45232Y08	CAP,CER 332K-B1H -CP
C851	08S45232Y08	CAP,CER 332K-B1H -CP
C854	08S45232Y11	CAP,CER 103K-B1C -CP
C855	08S45232Y08	CAP,CER 332K-B1H -CP
C860	08T81833F13	CAP,CER 106K-B1C -CP
C861	08S45232Y17	CAP,CER 104K-B0J -CP
C862	08T81833F13	CAP,CER 106K-B1C -CP
C865	08S65668Y04	CAP,CER 104KX5R1A-CP

C867	08T81833F13	CAP,CER 106K-B1C -CP
C868	08S35374W10	CAP,CER 225K-B1A -CP
C869	08S35374W10	CAP,CER 225K-B1A -CP
C870	08S65668Y04	CAP,CER 104KX5R1A-CP
C871	08S45232Y11	CAP,CER 103K-B1C -CP
C872	08S45232Y17	CAP,CER 104K-B0J -CP
C874	08S45232Y17	CAP,CER 104K-B0J -CP
C875	08S45232Y17	CAP,CER 104K-B0J -CP
C876	08S45232Y11	CAP,CER 103K-B1C -CP
C878	08S45232Y08	CAP,CER 332K-B1H -CP
C880	08T81833F13	CAP,CER 106K-B1C -CP
C881	08S45231Y25	CAP,CER 101J-CH1H-CP
C882	08S45677W40	CAP,CER.151J-CH1H-CP
C883	08S45677W40	CAP,CER.151J-CH1H-CP
C884	08S45231Y25	CAP,CER 101J-CH1H-CP
C885	08S45677W40	CAP,CER.151J-CH1H-CP
C886	08S45677W40	CAP,CER.151J-CH1H-CP
C901	08S65667Y05	CAP,CER 105KX5R1A-CP
C902	08S65667Y05	CAP,CER 105KX5R1A-CP
C903	08S45232Y11	CAP,CER 103K-B1C -CP
C904	08S45232Y17	CAP,CER 104K-B0J -CP
CB501	09T45442Y45	FFC,54104-4592 -EQ
CB502	09T15107Y24	FFC,52435-2491 -ED
CB504	09T15107Y10	FFC,52745-1090 -E9
CB801	09T15107Y28	FFC,52435-2891 -ED
CB861	09T15107Y24	FFC,52435-2491 -ED
D801	48-04465Z01	DIO,MA2711100L-TX-CP
D802	48-04465Z01	DIO,MA2711100L-TX-CP
IC601	51-03558Z02	MN35206UB -QT
IC721	53-07956Z14	OFL,V3.007DV37M15B
IC725	51-00726Z02	MB85R256PFCN-G -ST
IC731	51-04556Z01	UPD45128163G5-A75-ST
IC861	51T55021Y02	BD7905BFS-E2 -SEE
L501	24T65689Y01	FBI,FBMJ2125HS420-CP
L502	24T65689Y01	FBI,FBMJ2125HS420-CP
L503	24T65689Y01	FBI,FBMJ2125HS420-CP
L601	24T95456W27	FBI,BLM18PG181SH1-CP
L841	24T25164Y25	IND,FSLM2520 10RJ-CP
L912	24T65331Y07	IND,LEMF2520 10RK-CP
L922	24T65331Y07	IND,LEMF2520 10RK-CP
Q601	48T45251W03	TR ,UN5212 22-22 -CP
Q602	48T15656Y01	TR,2SC4617-TL -CP
Q801	48T75011W01	TR,2SD1782K-PQR-6-CP
Q802	48T55462Y01	TR,2SB1132-QR-100-E2
Q810	48T75366Y06	TR,FMC2-T148 -CP
Q811	48T75011W01	TR,2SD1782K-PQR-6-CP
Q812	48T55462Y01	TR,2SB1132-QR-100-E2
Q831	48T25137Y02	TR,UN9212J-TX -CP
Q832	48T25137Y06	TR,UN9216J-TX -CP
Q833	48T25137Y06	TR,UN9216J-TX -CP
R10	06S15616Y23	RES,RK JUMPER1/16-CP
R11	06S15616Y23	RES,RK JUMPER1/16-CP
R12	06S15616Y23	RES,RK JUMPER1/16-CP
R13	06S15616Y23	RES,RK JUMPER1/16-CP
R14	06S15616Y23	RES,RK JUMPER1/16-CP
R15	06S15616Y23	RES,RK JUMPER1/16-CP
R16	06S15616Y23	RES,RK JUMPER1/16-CP

R17	06S15616Y23	RES,RK JUMPER1/16-CP
R501	06S15615Y81	RES,RK 223J 1/16 -CP
R502	06S15615Y81	RES,RK 223J 1/16 -CP
R503	06S15615Y81	RES,RK 223J 1/16 -CP
R504	06S15615Y81	RES,RK 223J 1/16 -CP
R505	06S15615Y81	RES,RK 223J 1/16 -CP
R506	06S15615Y81	RES,RK 223J 1/16 -CP
R512	06S15615Y81	RES,RK 223J 1/16 -CP
R513	06S15615Y81	RES,RK 223J 1/16 -CP
R514	06S15615Y25	RES,RK 101J 1/16 -CP
R515	06S15615Y81	RES,RK 223J 1/16 -CP
R516	06S15615Y81	RES,RK 223J 1/16 -CP
R519	06S15615Y25	RES,RK 101J 1/16 -CP
R520	06S15615Y25	RES,RK 101J 1/16 -CP
R521	06S15615Y25	RES,RK 101J 1/16 -CP
R551	06S15615Y49	RES,RK 102J 1/16 -CP
R552	06S15615Y81	RES,RK 223J 1/16 -CP
R553	06S15615Y49	RES,RK 102J 1/16 -CP
R561	06S15615Y17	RES,RK 47RJ 1/16 -CP
R562	06S15615Y25	RES,RK 101J 1/16 -CP
R563	06S15615Y25	RES,RK 101J 1/16 -CP
R564	06S15615Y25	RES,RK 101J 1/16 -CP
R565	06S15615Y25	RES,RK 101J 1/16 -CP
R566	06S15616Y23	RES,RK JUMPER1/16-CP
R567	06S15615Y23	RES,RK 82RJ 1/16 -CP
R568	06S15615Y25	RES,RK 101J 1/16 -CP
R569	06S15615Y17	RES,RK 47RJ 1/16 -CP
R570	06S15615Y17	RES,RK 47RJ 1/16 -CP
R571	06S15615Y17	RES,RK 47RJ 1/16 -CP
R572	06S15615Y17	RES,RK 47RJ 1/16 -CP
R573	06S15615Y17	RES,RK 47RJ 1/16 -CP
R574	06S15615Y17	RES,RK 47RJ 1/16 -CP
R575	06S15615Y17	RES,RK 47RJ 1/16 -CP
R576	06S15615Y25	RES,RK 101J 1/16 -CP
R577	06S15615Y21	RES,RK 68RJ 1/16 -CP
R601	06S15615Y65	RES,RK 472J 1/16 -CP
R604	06S15615Y81	RES,RK 223J 1/16 -CP
R611	06S15615Y81	RES,RK 223J 1/16 -CP
R613	06S15615Y81	RES,RK 223J 1/16 -CP
R614	06S15615Y81	RES,RK 223J 1/16 -CP
R617	06S15593Y53	RES,RK 152F 1/10 -CP
R618	06S15593Y97	RES,RK 104F 1/10 -CP
R619	06S15593Y59	RES,RK 272F 1/10 -CP
R620	06S15594Y02	RES,RK 154F 1/10 -CP
R625	06S15615Y81	RES,RK 223J 1/16 -CP
R626	06S15616Y23	RES,RK JUMPER1/16-CP
R627	06S15615Y13	RES,RK 33RJ 1/16 -CP
R628	06S15615Y13	RES,RK 33RJ 1/16 -CP
R629	06S15615Y13	RES,RK 33RJ 1/16 -CP
R630	06S15615Y81	RES,RK 223J 1/16 -CP
R634	06S15615Y81	RES,RK 223J 1/16 -CP
R635	06S15615Y81	RES,RK 223J 1/16 -CP
R636	06S15615Y81	RES,RK 223J 1/16 -CP
R637	06S15615Y81	RES,RK 223J 1/16 -CP
R638	06S15615Y81	RES,RK 223J 1/16 -CP
R639	06S15615Y81	RES,RK 223J 1/16 -CP
R641	06S15615Y25	RES,RK 101J 1/16 -CP

R642	06S15615Y25	RES,RK 101J 1/16 -CP
R643	06S15615Y25	RES,RK 101J 1/16 -CP
R644	06S15615Y25	RES,RK 101J 1/16 -CP
R645	06S15615Y25	RES,RK 101J 1/16 -CP
R646	06S15615Y25	RES,RK 101J 1/16 -CP
R647	06S15615Y25	RES,RK 101J 1/16 -CP
R648	06S15615Y25	RES,RK 101J 1/16 -CP
R649	06S15615Y25	RES,RK 101J 1/16 -CP
R650	06S15615Y25	RES,RK 101J 1/16 -CP
R651	06S15615Y25	RES,RK 101J 1/16 -CP
R652	06S15615Y25	RES,RK 101J 1/16 -CP
R653	06S15615Y25	RES,RK 101J 1/16 -CP
R654	06S15615Y25	RES,RK 101J 1/16 -CP
R655	06S15615Y25	RES,RK 101J 1/16 -CP
R656	06S15615Y25	RES,RK 101J 1/16 -CP
R659	06S15615Y21	RES,RK 68RJ 1/16 -CP
R660	06S15615Y21	RES,RK 68RJ 1/16 -CP
R661	06S15615Y21	RES,RK 68RJ 1/16 -CP
R662	06S15615Y21	RES,RK 68RJ 1/16 -CP
R663	06S15615Y21	RES,RK 68RJ 1/16 -CP
R664	06S15615Y21	RES,RK 68RJ 1/16 -CP
R665	06S15615Y21	RES,RK 68RJ 1/16 -CP
R666	06S15615Y21	RES,RK 68RJ 1/16 -CP
R667	06S15615Y21	RES,RK 68RJ 1/16 -CP
R668	06S15615Y21	RES,RK 68RJ 1/16 -CP
R669	06S15615Y21	RES,RK 68RJ 1/16 -CP
R670	06S15615Y21	RES,RK 68RJ 1/16 -CP
R671	06S15615Y21	RES,RK 68RJ 1/16 -CP
R672	06S15615Y21	RES,RK 68RJ 1/16 -CP
R673	06S15615Y21	RES,RK 68RJ 1/16 -CP
R674	06S15615Y01	RES,RK 10RJ 1/16 -CP
R675	06S15615Y17	RES,RK 47RJ 1/16 -CP
R676	06S15615Y21	RES,RK 68RJ 1/16 -CP
R677	06S15615Y21	RES,RK 68RJ 1/16 -CP
R678	06S15615Y21	RES,RK 68RJ 1/16 -CP
R679	06S15615Y21	RES,RK 68RJ 1/16 -CP
R680	06S15615Y21	RES,RK 68RJ 1/16 -CP
R681	06S15615Y25	RES,RK 101J 1/16 -CP
R682	06S15615Y21	RES,RK 68RJ 1/16 -CP
R683	06S15615Y25	RES,RK 101J 1/16 -CP
R684	06S15615Y25	RES,RK 101J 1/16 -CP
R685	06S15615Y25	RES,RK 101J 1/16 -CP
R686	06S15615Y25	RES,RK 101J 1/16 -CP
R687	06S15615Y25	RES,RK 101J 1/16 -CP
R688	06S15615Y25	RES,RK 101J 1/16 -CP
R689	06S15615Y25	RES,RK 101J 1/16 -CP
R690	06S15615Y25	RES,RK 101J 1/16 -CP
R691	06S15615Y25	RES,RK 101J 1/16 -CP
R692	06S15615Y25	RES,RK 101J 1/16 -CP
R693	06S15615Y25	RES,RK 101J 1/16 -CP
R694	06S15615Y25	RES,RK 101J 1/16 -CP
R695	06S15615Y25	RES,RK 101J 1/16 -CP
R696	06S15615Y25	RES,RK 101J 1/16 -CP
R697	06S15615Y81	RES,RK 223J 1/16 -CP
R698	06S15615Y81	RES,RK 223J 1/16 -CP
R700	06S15616Y23	RES,RK JUMPER1/16-CP
R701	06S15616Y23	RES,RK JUMPER1/16-CP

R703	06S15615Y17	RES,RK 47RJ 1/16 -CP
R771	06S15615Y81	RES,RK 223J 1/16 -CP
R772	06S15615Y81	RES,RK 223J 1/16 -CP
R773	06S15615Y81	RES,RK 223J 1/16 -CP
R774	06S15615Y81	RES,RK 223J 1/16 -CP
R775	06S15615Y81	RES,RK 223J 1/16 -CP
R776	06S15615Y81	RES,RK 223J 1/16 -CP
R777	06S15615Y81	RES,RK 223J 1/16 -CP
R778	06S15615Y81	RES,RK 223J 1/16 -CP
R779	06S15615Y81	RES,RK 223J 1/16 -CP
R780	06S15615Y81	RES,RK 223J 1/16 -CP
R781	06S15615Y81	RES,RK 223J 1/16 -CP
R782	06S15615Y81	RES,RK 223J 1/16 -CP
R783	06S15615Y81	RES,RK 223J 1/16 -CP
R784	06S15615Y81	RES,RK 223J 1/16 -CP
R785	06S15615Y81	RES,RK 223J 1/16 -CP
R786	06S15615Y81	RES,RK 223J 1/16 -CP
R801	06S15615Y41	RES,RK 471J 1/16 -CP
R802	06S15615Y41	RES,RK 471J 1/16 -CP
R803	06S15615Y09	RES,RK 22RJ 1/16 -CP
R804	06S45675W43	RES,RK JUMPER1/10-CP
R805	06S65522Y22	RES,RK 5R6F 1/4 -CP
R806	06S45675W06	RES,RK 104J 1/10 -CP
R811	06S15615Y41	RES,RK 471J 1/16 -CP
R812	06S15615Y41	RES,RK 471J 1/16 -CP
R813	06S15615Y09	RES,RK 22RJ 1/16 -CP
R814	06S45675W43	RES,RK JUMPER1/10-CP
R815	06S65522Y22	RES,RK 5R6F 1/4 -CP
R816	06S45675W06	RES,RK 104J 1/10 -CP
R821	06S65522Y22	RES,RK 5R6F 1/4 -CP
R822	06S35083Y52	RES,RK 1R0F 1/4 -CP
R825	06S15616Y23	RES,RK JUMPER1/16-CP
R826	06S15616Y23	RES,RK JUMPER1/16-CP
R827	06S15616Y23	RES,RK JUMPER1/16-CP
R830	06S15615Y25	RES,RK 101J 1/16 -CP
R831	06S15615Y49	RES,RK 102J 1/16 -CP
R832	06S15615Y23	RES,RK 82RJ 1/16 -CP
R833	06S15615Y23	RES,RK 82RJ 1/16 -CP
R835	06S15615Y25	RES,RK 101J 1/16 -CP
R844	06S15616Y23	RES,RK JUMPER1/16-CP
R849	06S15616Y23	RES,RK JUMPER1/16-CP
R850	06S15616Y23	RES,RK JUMPER1/16-CP
R851	06S15616Y23	RES,RK JUMPER1/16-CP
R852	06S15616Y23	RES,RK JUMPER1/16-CP
R853	06S15616Y23	RES,RK JUMPER1/16-CP
R854	06S15616Y23	RES,RK JUMPER1/16-CP
R855	06S15615Y25	RES,RK 101J 1/16 -CP
R856	06S15615Y73	RES,RK 103J 1/16 -CP
R857	06S15615Y73	RES,RK 103J 1/16 -CP
R858	06S15615Y25	RES,RK 101J 1/16 -CP
R859	06S15615Y25	RES,RK 101J 1/16 -CP
R860	06S15615Y73	RES,RK 103J 1/16 -CP
R861	06S45674W02	RES,RK 2R7J 1/10 -CP
R862	06S45674W02	RES,RK 2R7J 1/10 -CP
R863	06S45674W02	RES,RK 2R7J 1/10 -CP
R864	06S45674W02	RES,RK 2R7J 1/10 -CP
R865	06S45674W02	RES,RK 2R7J 1/10 -CP

R866	06S45674W02	RES,RK 2R7J 1/10 -CP
R867	06S45674W02	RES,RK 2R7J 1/10 -CP
R868	06S45674W02	RES,RK 2R7J 1/10 -CP
R869	06S45674W02	RES,RK 2R7J 1/10 -CP
R870	06S45674W02	RES,RK 2R7J 1/10 -CP
R876	06S15615Y33	RES,RK 221J 1/16 -CP
R877	06S15615Y27	RES,RK 121J 1/16 -CP
R878	06S15615Y73	RES,RK 103J 1/16 -CP
R880	06S15616Y23	RES,RK JUMPER1/16-CP
R881	06S15615Y73	RES,RK 103J 1/16 -CP
R882	06S15615Y81	RES,RK 223J 1/16 -CP
R883	06S15615Y25	RES,RK 101J 1/16 -CP
R884	06S15615Y73	RES,RK 103J 1/16 -CP
R885	06S15615Y81	RES,RK 223J 1/16 -CP
R886	06S15615Y25	RES,RK 101J 1/16 -CP
R889	06S15615Y25	RES,RK 101J 1/16 -CP
R890	06S15615Y81	RES,RK 223J 1/16 -CP
R891	06S15616Y23	RES,RK JUMPER1/16-CP
R896	06S15615Y73	RES,RK 103J 1/16 -CP
R897	06S15615Y73	RES,RK 103J 1/16 -CP
R901	06S15616Y32	RES,RK 6R8J 1/16 -CP
R902	06-02713Z03	RES,RK 223D 1/16 -CP
R903	06S65415Y38	RES,RK 123F 1/16 -CP
R904	06S65415Y33	RES,RK 472F 1/16 -CP
R905	06S65415Y37	RES,RK 103F 1/16 -CP
R911	06-02741Z01	RES,RK 331D 1/16 -CP
R912	06-02741Z01	RES,RK 331D 1/16 -CP
R921	06S15593Y37	RES,RK 331F 1/10 -CP
R922	06S15593Y37	RES,RK 331F 1/10 -CP
R931	06S64996F43	RES,RK 1R5J 1/8 -CP
R932	06S64996F43	RES,RK 1R5J 1/8 -CP
R933	06S64996F43	RES,RK 1R5J 1/8 -CP
R934	06S64996F43	RES,RK 1R5J 1/8 -CP
R935	06S64996F43	RES,RK 1R5J 1/8 -CP
R936	06S64996F43	RES,RK 1R5J 1/8 -CP
TH601	48T75201Y03	TMT,NCP15XH103F0S-CP
TH602	48T75201Y03	TMT,NCP15XH103F0S-CP
VR901	18T25572Y11	VAR,RH03ADC 472-X-CP
XL601	91T75115Y01	XTL,FXO-64FL2 27M-E2
Z575	91T75196Y23	EMI,BK1005LL181 -CP
Z576	91T75196Y23	EMI,BK1005LL181 -CP
Z577	91T75196Y23	EMI,BK1005LL181 -CP
Z578	91T75196Y23	EMI,BK1005LL181 -CP
Z579	91T75196Y23	EMI,BK1005LL181 -CP
Z580	91T75196Y02	EMI,BK1005LL680 -CP
Z581	91T75196Y23	EMI,BK1005LL181 -CP
Z582	91T75196Y03	EMI,BK1005LL100 -CP
Z583	91T75196Y03	EMI,BK1005LL100 -CP
Z584	91T75196Y03	EMI,BK1005LL100 -CP
Z585	91T75196Y03	EMI,BK1005LL100 -CP
Z586	91T75196Y03	EMI,BK1005LL100 -CP
Z589	91T75196Y23	EMI,BK1005LL181 -CP

=======Miscellaneous

ANT1000	01T02127K10	ASSY,ANT CABLE 9811A
CB3300	09T13515W10	WTB,5569-10A1 -DB
CB4501	09T65033Y16	BTB,CAM-C73-016 -EF

CH4701	09T65215Y66	BTB,CAM-C74-016 -B
ET2200	01T15332Y12	ASSY,WIRE SUB-W D100
ET3302	09-06530Z01	ASSY,ATFC-0491-01A
ET4001	09-06158Z01	ASSY,ATFD-0691-03A
ET6500	09-06157Z01	ASSY,ATFD-0693-03A
ET4501	09-06156Z01	ASSY,ATFD-0692-03A
FR8201	50-02759Z01	ASSY,AFL12A901A
IC8801	51T75111W01	TOTX193 -DS
LCD8601	65-01708Z01	ASSY,LB065WQ2
M8905	01V66100Y70	ASSY,MOTOR LD
M8906	01V66100Y68	ASSY,MOTOR TL
SW4510	40T45279Y07	ENC,EC09E15244 -DB
SW4701	40T65353Y01	SW,TACT SKRPACE010E2
SW8951	40T15494Y15	SW,DETCT SPVG1107-E6
SW8952	40T15494Y15	SW,DETCT SPVG1107-E6
SW8953	40T15494Y14	SW,DETCT SPVG2106-E6
SW8954	40T15494Y14	SW,DETCT SPVG2106-E6

=======DV37M15B

HD101	EP-00830Z01	ED21A51L
M101	59-03798Z01	MOTOR,M1N10RB95G
M102	59-02071Z01	MOTOR,24C0303020
M103	59T65142Y01	MOTOR,MSDV020L01
SW406	40T15494Y12	SW,DETCT SPVG2303-E6
SW801	40T55230Y01	SW,DETCT ESE13V01CE5
SW802	40T55230Y01	SW,DETCT ESE13V01CE5
SW803	40T55043Y02	SW,DETCT SPVL12 -E5
SW804	40T15494Y12	SW,DETCT SPVG2303-E6
SW805	40T55230Y01	SW,DETCT ESE13V01CE5

Exploded View (Cabinet)(1/3)

(Monitor Unit)

IVA-D100/IVA-D100E

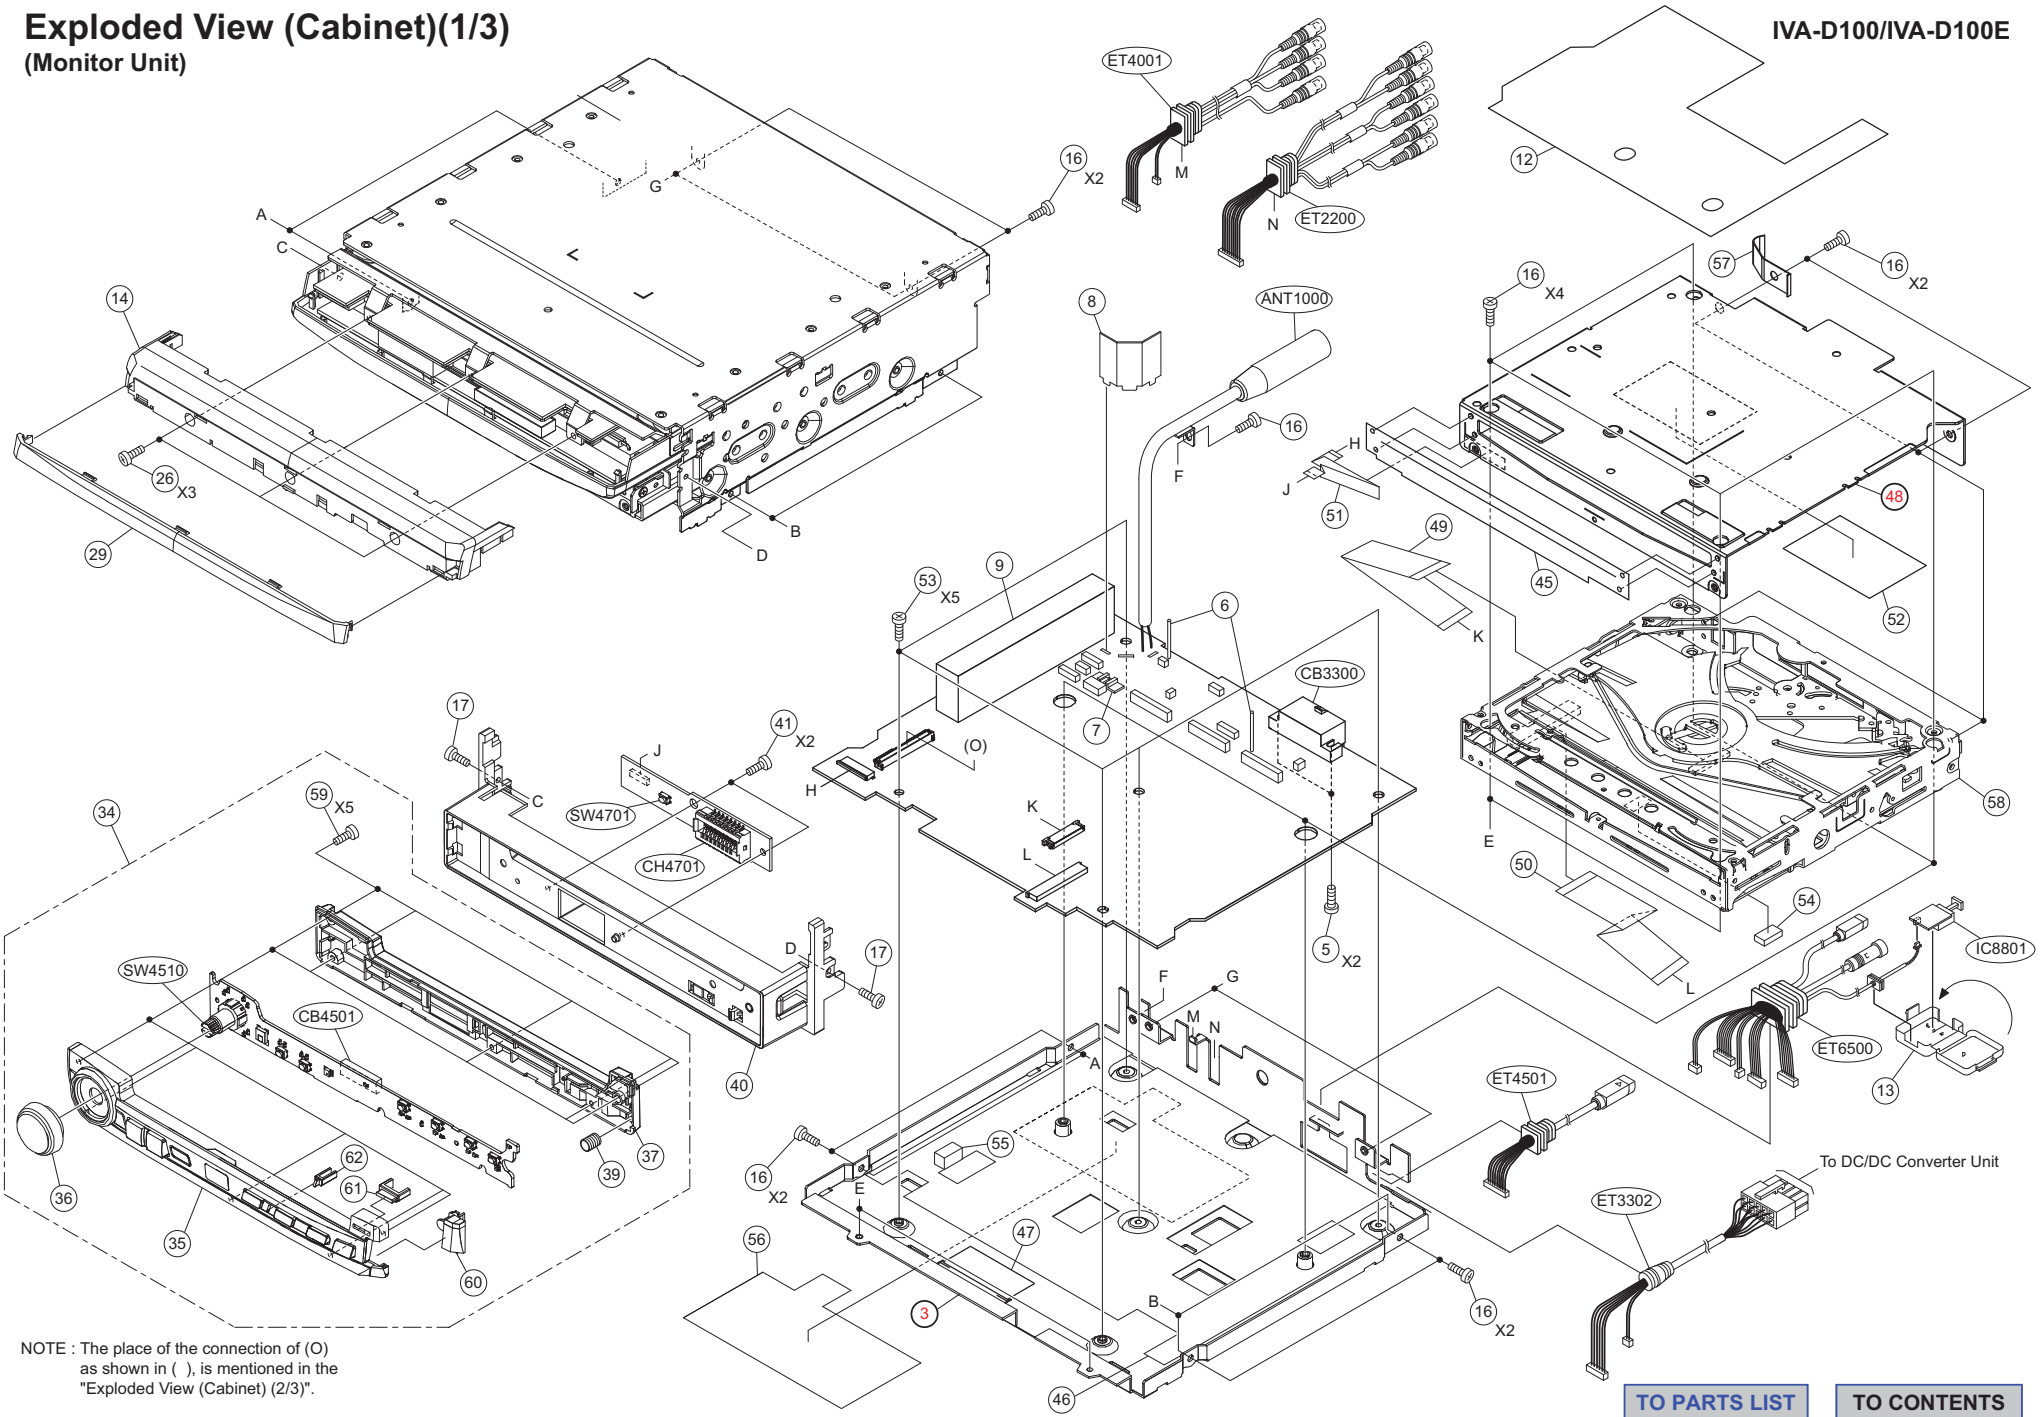

NOTE : The place of the connection of (O) as shown in ( ), is mentioned in the "Exploded View (Cabinet) (2/3)".

TO PARTS LIST TO CONTENTS

Exploded View (Cabinet)(2/3)

(Monitor Unit)

IVA-D100/IVA-D100E

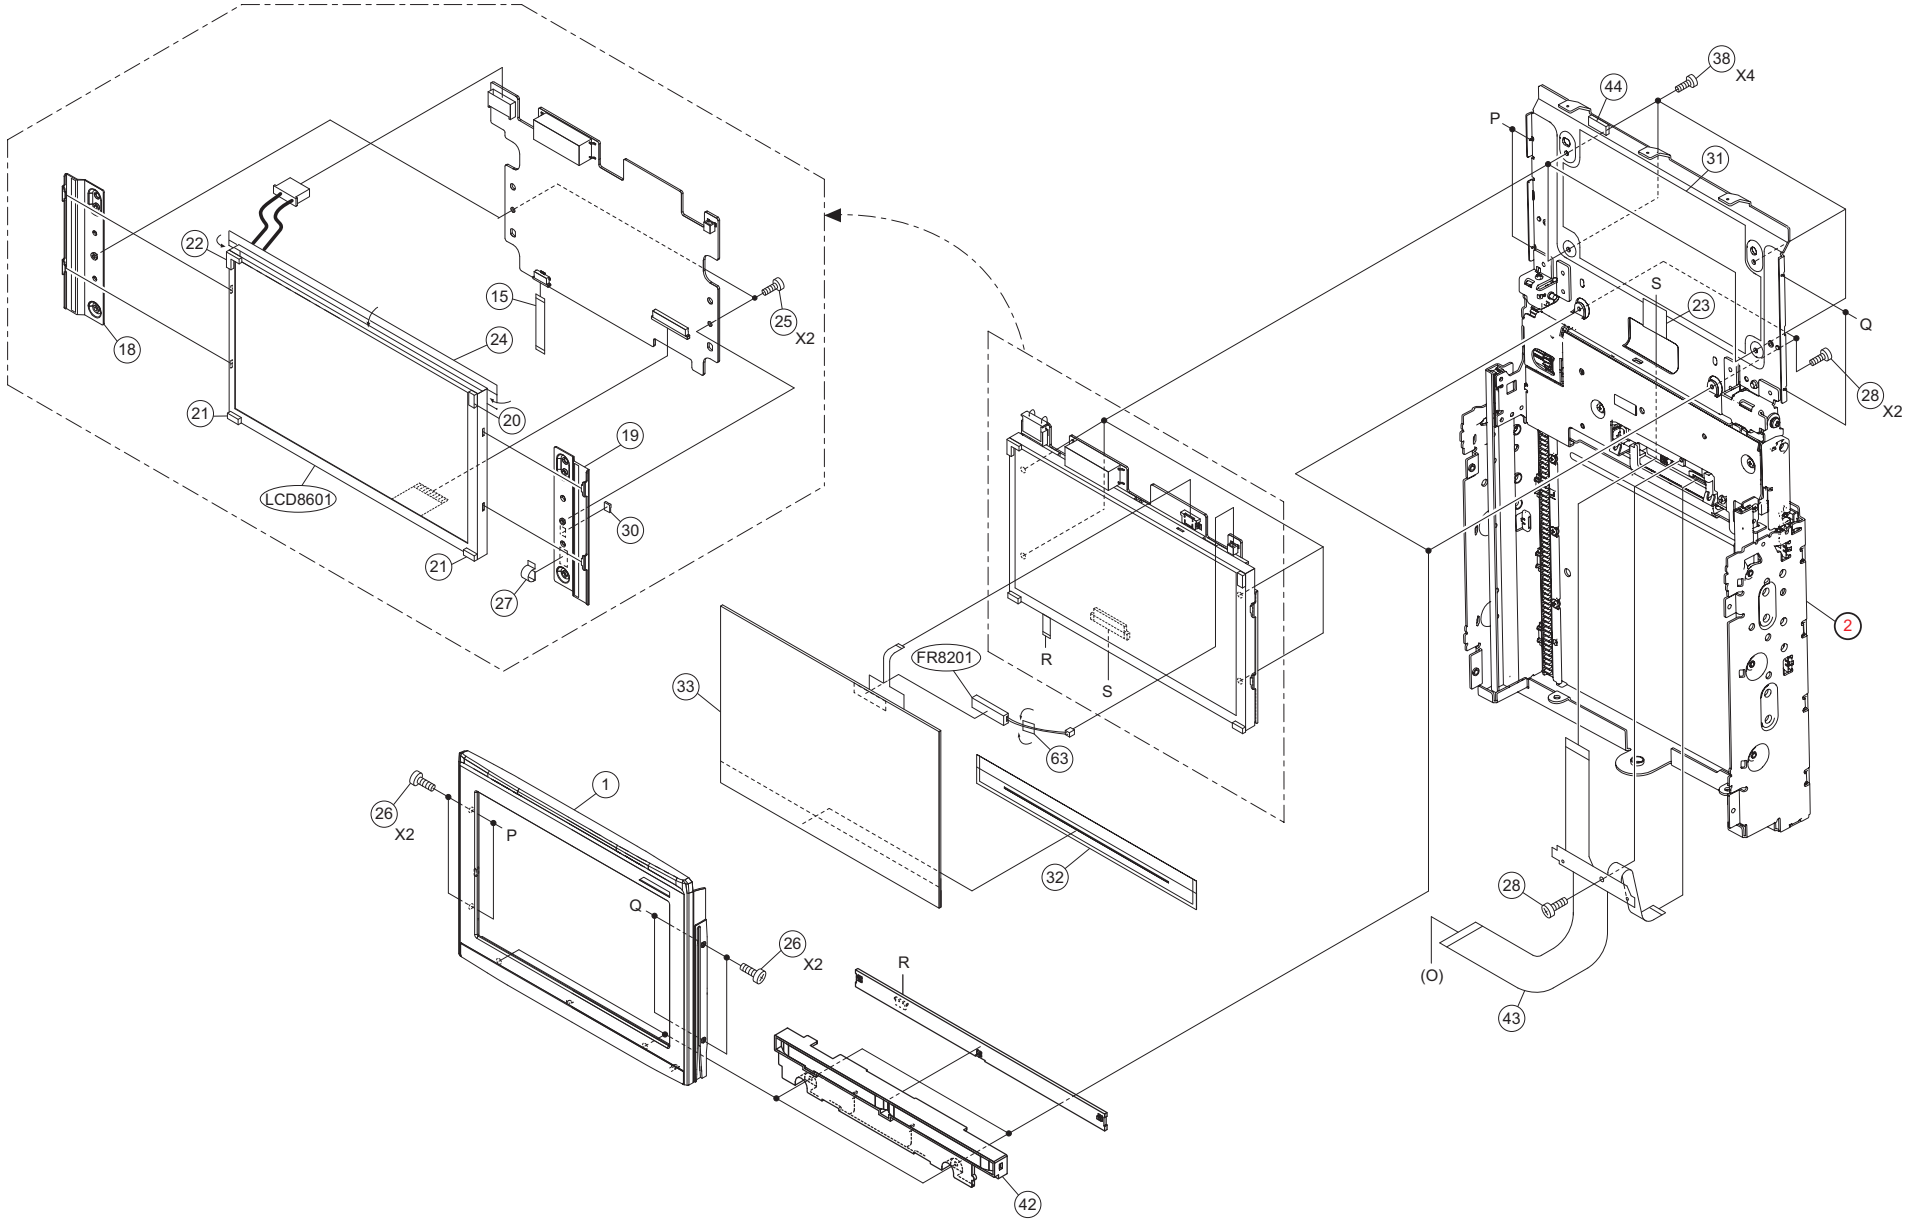

NOTE : The place of the connection of (O) as shown in ( ), is mentioned in the "Exploded View (Cabinet) (1/3)".

TO PARTS LIST TO CONTENTS

Exploded View (Cabinet)(3/3)

(Monitor Unit)

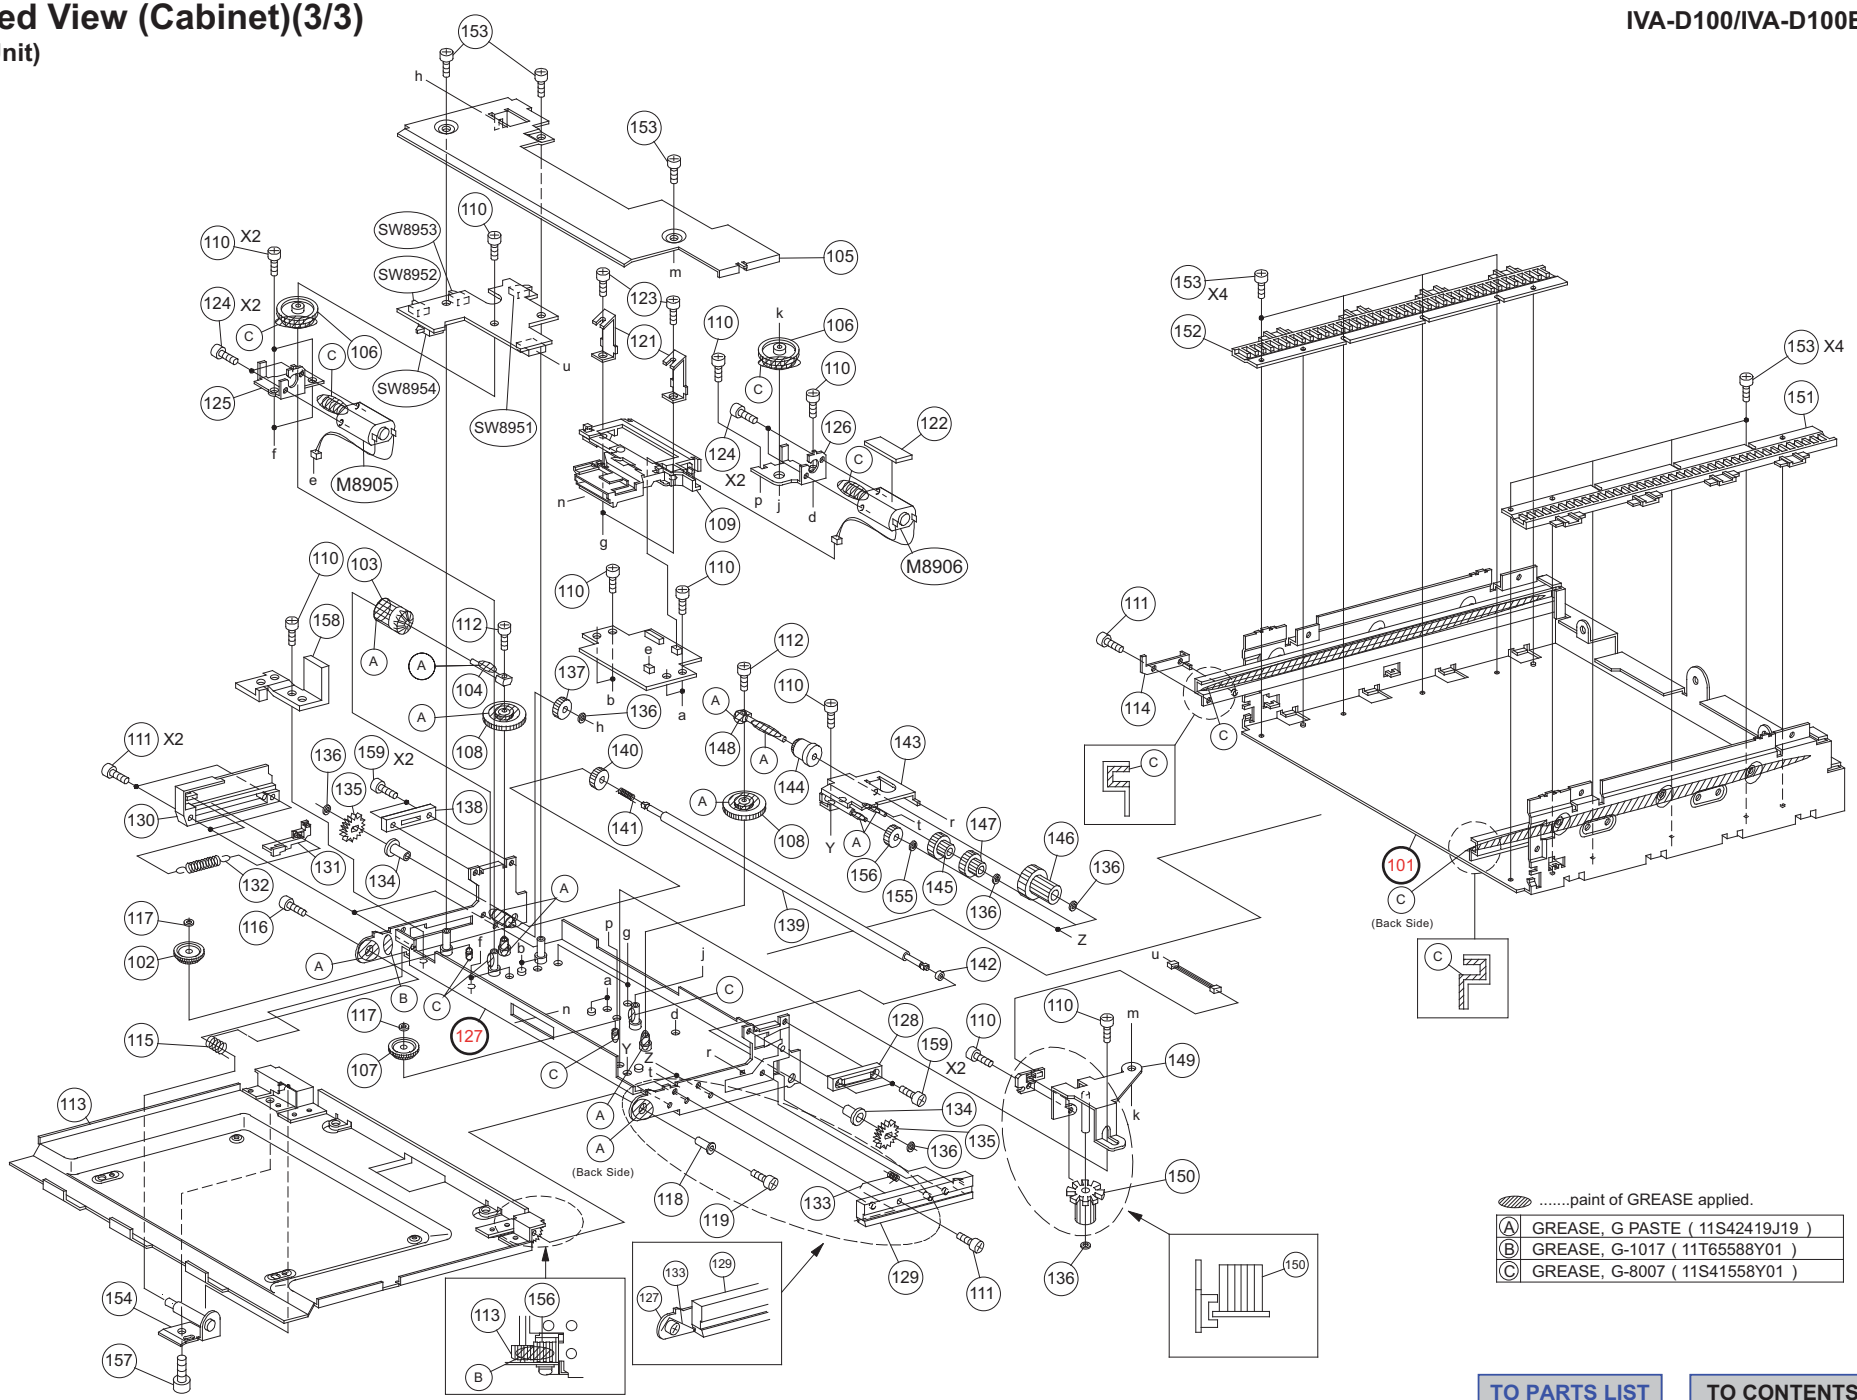

TO PARTS LIST TO CONTENTS

Cabinet Assembly Parts List (Monitor Unit)

NOTE : The part that has not PART NUMBER will not be supplied.

#1 : For North American Model Only,
$1 : For General Foreign (Region3) Model Only,
%1 : For General Foreign (Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

#1	1	EN-05692Z01	NOSE,MONITOR ASSY
$1	1	EN-05692Z04	NOSE,MONITOR ASSY
%1	1	EN-05692Z04	NOSE,MONITOR ASSY
&1	1	EN-05692Z04	NOSE,MONITOR ASSY
	2	- - - - - - - - - - -	JL44A02A
	3	- - - - - - - - - - -	CHAS,BASE
	5	03S63857F51	SCR,TPG M3X10
	6	29C41045P06	LUG,BOARD-IN 50MM
	7	36A70327W01	KNOB,SLIDE
	8	15-06766Z01	COVER,ANT
	9	TU-04662Z01	TUNER,MX-A198(TU1001)
	12	14A70032Y02	INS,COVER,FPC
	13	15-05711Z01	CASE,OPT
	14	13-05326Z01	NOSE,MONITOR TOP
	15	30T04251K07	SML2CD-6X62.0-BDX6
	16	03S60822Y07	SCR,S-T 2.6X4 ZN A
	17	03S60820Y37	SCR,MCH 2X3 ZNNA
	18	07-05707Z01	BKT,LCD L
	19	07-05708Z01	BKT,LCD R
	20	75S61553Y95	CUS,RUB 10X5XT1.3
	21	75-06068Z04	CUS,RUB 10X5XT0.9
	22	75-06386Z01	CUS,RUB TP-LCD
	23	14A61699Y01	INS,FPC D900
	24	14-06718Z01	INS,COVER LCD
	25	03-02511Z02	SCR,S-T 2X4 ZB A
	26	03-00712Z20	SCR,MCH 1.4X3 ZB A
	27	41T15030Y05	SPR,97-520-02 1yama
	28	03S60823Y04	SCR,P-T 2X6 ZN A
	29	34-05327Z01	SCALE,TOP
	30	07T35194Y04	BKT,97-550-02-02
	31	14A70812Y01	INS,PWB LCD (2)
	32	14-05737Z01	INS,GLIDE
	33	40-05498Z01	ASSY,N010-0526-T641
#1	34	66-05991Z88	M-ASSY,DF/ESC UNIT A
$1	34	66-06276Z87	M-ASSY,DF/ESC UNIT E
%1	34	66-06276Z87	M-ASSY,DF/ESC UNIT E
&1	34	66-06276Z87	M-ASSY,DF/ESC UNIT E
#1	35	EN-05319Z01	NOSE,PIECE ASSY
$1	35	EN-05319Z04	NOSE,PIECE ASSY
%1	35	EN-05319Z04	NOSE,PIECE ASSY
&1	35	EN-05319Z04	NOSE,PIECE ASSY
	36	36-05341Z01	KNOB,VOL ASSY

37	13-05709Z01	NOSE,BOTTOM
38	03-02511Z02	SCR,S-T 2X4 ZB A
39	41A50111W10	SPRING,KNOB
40	EN-05320Z01	NOSE,ESC ASSY
41	03S60823Y17	SCR,P-T 2X4 ZN A
42	15-05971Z01	LENS,GLIDE ASSY
43	84-06248Z01	FPC,MAIN RAAL603A
44	75S61553Y39	CUS,RUB 15X4XT3
45	15-05348Z01	COVER,DUST
46	14-06034Z01	INS,MAIN
47	75-06068Z07	CUS,RUB 35X15XT0.5
48	- - - - - - - - - - -	COVER,DV-TM
49	30T04251K08	SML2CD-24X102.0-BDX6
50	30T04251K10	SML2CD-45X102.0-BDX6
51	30T04251K09	SML2CD-20X150.0-ADX5
52	14S31545Y50	INS,CVR 60X60XT0.1
53	03S60822Y33	SCR,S-T 2.6X4.5 ZN A
54	75S40755Y99	CUS,RUB 10X20XT2
55	75T25010Y57	CUSHION,SLD 10-5-10
56	14-07768Z01	INS,BOTTOM
57	41-08343Z01	SPRING,GND
58	DV-05029Z01	DV37M15B
59	03S70693Y17	SCR,P-T 1.7X4 ZB A
60	36-05338Z01	KNOB,RELEASE
61	61-05339Z01	LENS,V-SEL
62	61-05340Z01	LENS,IND
63	75-04360Z03	CUSHION,CABLE
101	- - - - - - - - - - -	ASSY,RIV CHAS TOP
102	44A60217Y01	GEAR,LD1
103	44A60218Y02	GEAR,LD2
104	47A60041Y01	SHAFT,LD
105	15C60059Y02	COVER,CHAS SLIDE
106	44B60043Y01	GEAR,TL1
107	44A60044Y01	GEAR,TL2
108	44A60045Y02	GEAR,TL3
109	15D60055Y01	HOLDER,FPC
110	03S60821Y01	SCR,WAS 2X3 ZN A
111	03S60820Y37	SCR,MCH 2X3 ZNNA
112	03S60821Y05	SCR,WAS 2X8 ZN A
113	01C70439Y02	ASSY,RIV BKT BTM
114	07A70434Y01	BKT,LEVER SW2
115	41A70447Y01	SPRING,MONITOR
116	03S60821Y09	SCR,WAS 2.6X5 ZN A
117	04B41345P38	WASH,2.6X4.7XT0.25
118	43A61388Y01	BUSH,MONITOR
119	03S60821Y15	SCR,WAS 2.6X16 ZN A
121	07A61647Y01	BKT,STOPPER
122	75S61553Y02	CUS,RUB 10X24XT4
123	03S94385F09	SCR,NYLOK M2X3 P2
124	03S68259F23	SCR,P-LOCK M2X3
125	01A61390Y01	ASSY,RIV BKT MTR LD
126	01A61389Y01	ASSY,RIV BKT MTR TL

127	- - - - - - - - - - -	ASSY,RIV CHAS SLIDE
128	45B60058Y01	SLIDER,LOAD
129	15B60056Y01	COVER,LOAD(L)
130	15B60057Y01	COVER,LOAD(R)
131	45C70435Y01	SLIDER,SW2
132	41A60065Y01	SPRING,LEVER SW
133	41B60754Y01	SPRING,GND
134	43A61579Y01	BUSH,CHAS SLIDE
135	44A60051Y01	GEAR,DRIVE(A)
136	04B41345P45	WASH,2.1X4.5X0.35
137	44A70451Y01	GEAR,TL8 MOLD
138	45B70039Y01	SLIDER,LOAD(R)
139	47B60061Y01	SHAFT,DRIVE
140	44A60052Y01	GEAR,DRIVE(B)
141	41A61505Y01	SPRING,DRIVE
142	43A61504Y01	BUSH,SPRING
143	01A60028Y01	ASSY,RIV BKT GER TL
144	44A60046Y02	GEAR,TL4
145	44A60047Y02	GERA,TL5
146	44B60219Y01	GEAR,LMT
147	44A60049Y02	GEAR,TL7
148	47A60042Y01	SHAFT,TL
149	01A60032Y01	ASSY,RIV BKT SENSOR
150	44A60040Y01	GEAR,SENSOR
151	44C60752Y01	RACK,LOAD(L)
152	44C60753Y01	RACK,LOAD(R)
153	03-00712Z31	SCR,MCH 2X2 ZBNA
154	01A70444Y01	ASSY,RIV BKT SPG
155	04B41345P09	WASH,2.3X7X0.25
156	44A60050Y02	GEAR,TL8
157	03-00712Z19	SCR,MCH 2.6X4 ZB A
158	07A70448Y01	BKT,SPRING STOPPER
159	03S60820Y33	SCR,MCH 2X3.5 ZNCA

Exploded View(DVD Deck Mechanism)

(DV37M15B)

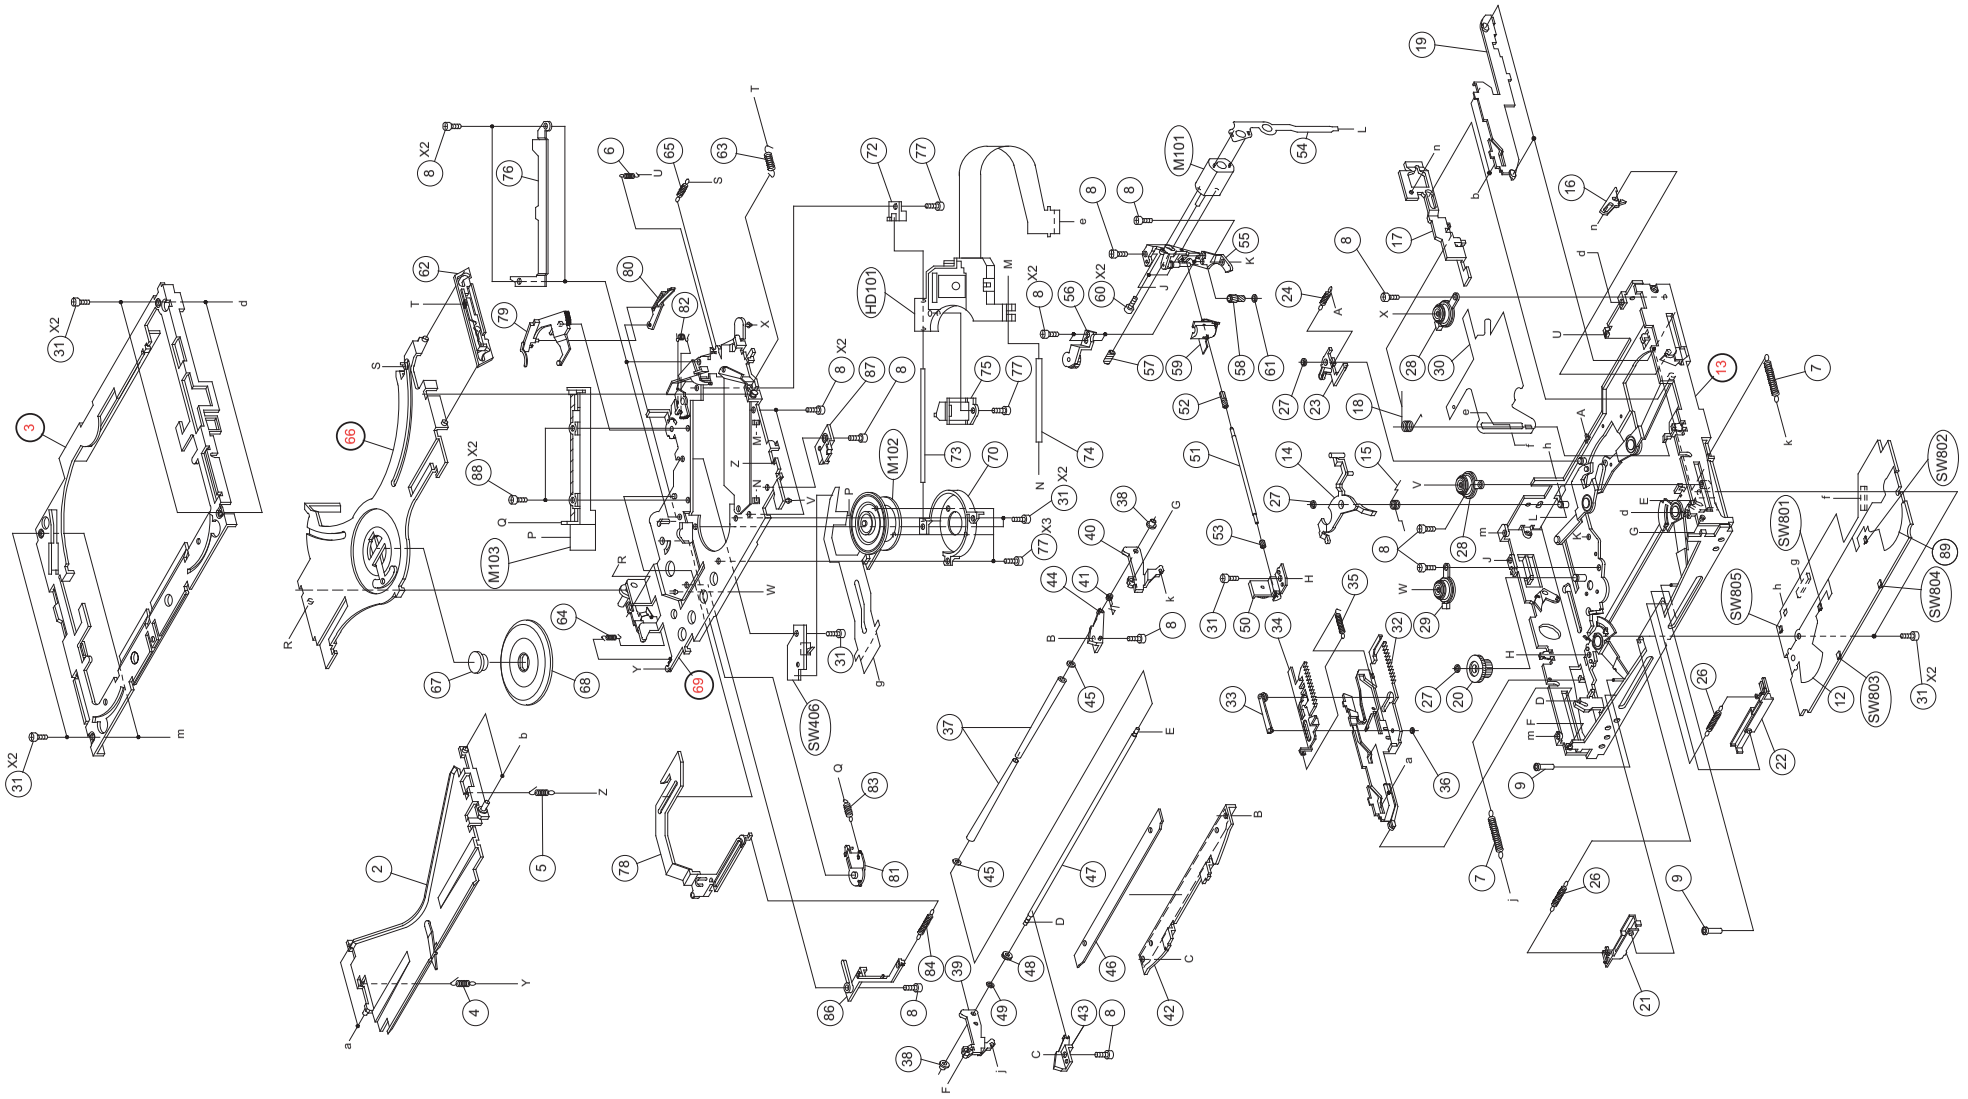

TO PARTS LIST TO CONTENTS

DVD Deck Mechanism Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

2	01A51490Y24	ASSY,RIV GUIDE TOP
3	- - - - - - - - - - -	CHASSIS,TOP
4	41A60338Y01	SPRING,DRIVE F-L
5	41A60339Y01	SPRING,DRIVE F-R
6	41A60340Y01	SPRING,DRIVE R
7	41A60344Y01	SPRING,LEV ROLL-L
8	03S94385F19	SCR,NYLOK M2X2.5
9	43-03093Z03	ROLLER,DISC PIN
12	14-01064Z01	INSULATOR,PWB L2
13	- - - - - - - - - - -	ASSY,RIV CHAS BASE
14	45C51003Y10	LEVER,TRIGER MAIN
15	41A51395Y01	SPRING,LEV TRG MAIN
16	45A50833Y11	LEVER,LINK SLDR(R)
17	45B51221Y11	SLIDER,LOCK(R2)
18	41A51396Y01	SPRING,SLD LOCK(R2)
19	45C51237Y10	SLIDER,LOCK(R1)
20	44A50829Y11	GEAR,LOAD(E)
21	45-01051Z03	SLIDER,DISC SW(L)
22	45-01052Z03	SLIDER,DISC SW(R)
23	45B50838Y11	LEVER,LOCK(RC)
24	41A60343Y01	SPRING,LEV LOCK-RC
26	41-02948Z01	SPRING,LEV DISC
27	04B41345P14	WASH,L. 2.1X4X0.25
28	75C60456Y04	DAMPER,DV-TM
29	75C60456Y05	DAMPER,DV-TM
30	14A51712Y01	INSULATOR,FPC
31	03S94385F07	SCR,NYLOK M2X2
32	45D51236Y10	SLIDER,LOCK(L)
33	01A51491Y11	ASSY,RIV LEV ASST
34	44-02001Z03	ASSY,SLIDER TRIGER 2
35	41A60348Y01	SPRING,SLD TRIGER
36	04B41345P15	WASH,1.2X3.5X0.35
37	49A51397Y03	ROLLER,DV-TM
38	43A51228Y11	BUSH,ARM GUIDE
39	45-02722Z03	LEVER,ROLLER(L)2
40	45-02723Z03	LEVER,ROLLER(R)2
41	41A60360Y01	SPRING,ARM GUIDE
42	45-01385Z03	ARM,DISC GUIDE
43	45B60959Y11	ARM,DISC GUIDE-L
44	45B60960Y11	ARM,DISC GUIDE-R
45	04S40075G09	WASH,2.6X4.7X0.25
46	14A61435Y01	INSULATOR,ARM DISC
47	47A51349Y01	SHAFT,ROLLER
48	44-01531Z03	GEAR,ROLLER-2
49	04B41345P02	WASH,1.7X3.5X0.25
50	07-01606Z03	ASSY,RIV BKT LD-F-3
51	47-01479Z01	SHAFT,LOAD
52	44A50827Y11	GEAR,LOAD(C)

53	44-01532Z03	GEAR,LOAD(F)-2
54	84-01207Z01	FPC,LOAD
55	07-01177Z03	ASSY,RIV BKT LOAD(R)
56	01A51487Y11	ASSY,RIV BKT LD-R2
57	44A50825Y11	GEAR,LOAD(A)
58	44A50826Y11	GEAR,LOAD(B)
59	07B51226Y11	BKT,SHAFT LOAD
60	03S30688Y17	SCR,MCH M1.4X2
61	04B41345P11	WASH,1.2X2.5X0.25
62	45B51235Y10	SLIDER,ARM LIFT(R)
63	41A60336Y01	SPRING,CLAMP-R
64	41A60335Y01	SPRING,CLAMP-L
65	41A60337Y01	SPRING,CLAMP-RTL
66	- - - - - - - - - - -	ASSY,RIV ARM CLAMP
67	43-01054Z03	STOPPER,CLAMP
68	43-01049Z02	TABLE,CLAMPER
69	- - - - - - - - - - -	ASSY,RIV CHAS PICKUP
70	07-01053Z03	BKT,SPINDLE ADJUST
72	07A50823Y11	BKT,SHAFT PICKUP
73	47A51347Y01	SHAFT,PICKUP MAIN
74	47-01057Z01	SHAFT,PICKUP SUB
75	41B50836Y11	SPRING,NUT
76	15A51210Y11	COVER,MAIN
77	03S94385F09	SCR,NYLOK M2X3 P2
78	45C51234Y02	SLIDER,8CM
79	01B61577Y10	ASSY,RIV LEVER-8L
80	45A51231Y10	LEVER,TRIGER 8CM
81	45-02638Z03	LEVER,TRIGER SUB2
82	41A51394Y01	SPRING,LEV 8CM(L)
83	41A60346Y01	SPRING,LEV TRG-SUB
84	41A60347Y01	SPRING,SLD 8CM
86	07A60069Y11	BKT,SLIDER 8CM
87	15B61279Y11	SPACER,DAMPER
88	03S94385F98	SCR,NYLOK M2X2.5
89	14-01063Z01	INSULATOR,PWB R2

Exploded View (Cabinet)

(Power Amplifier Unit)

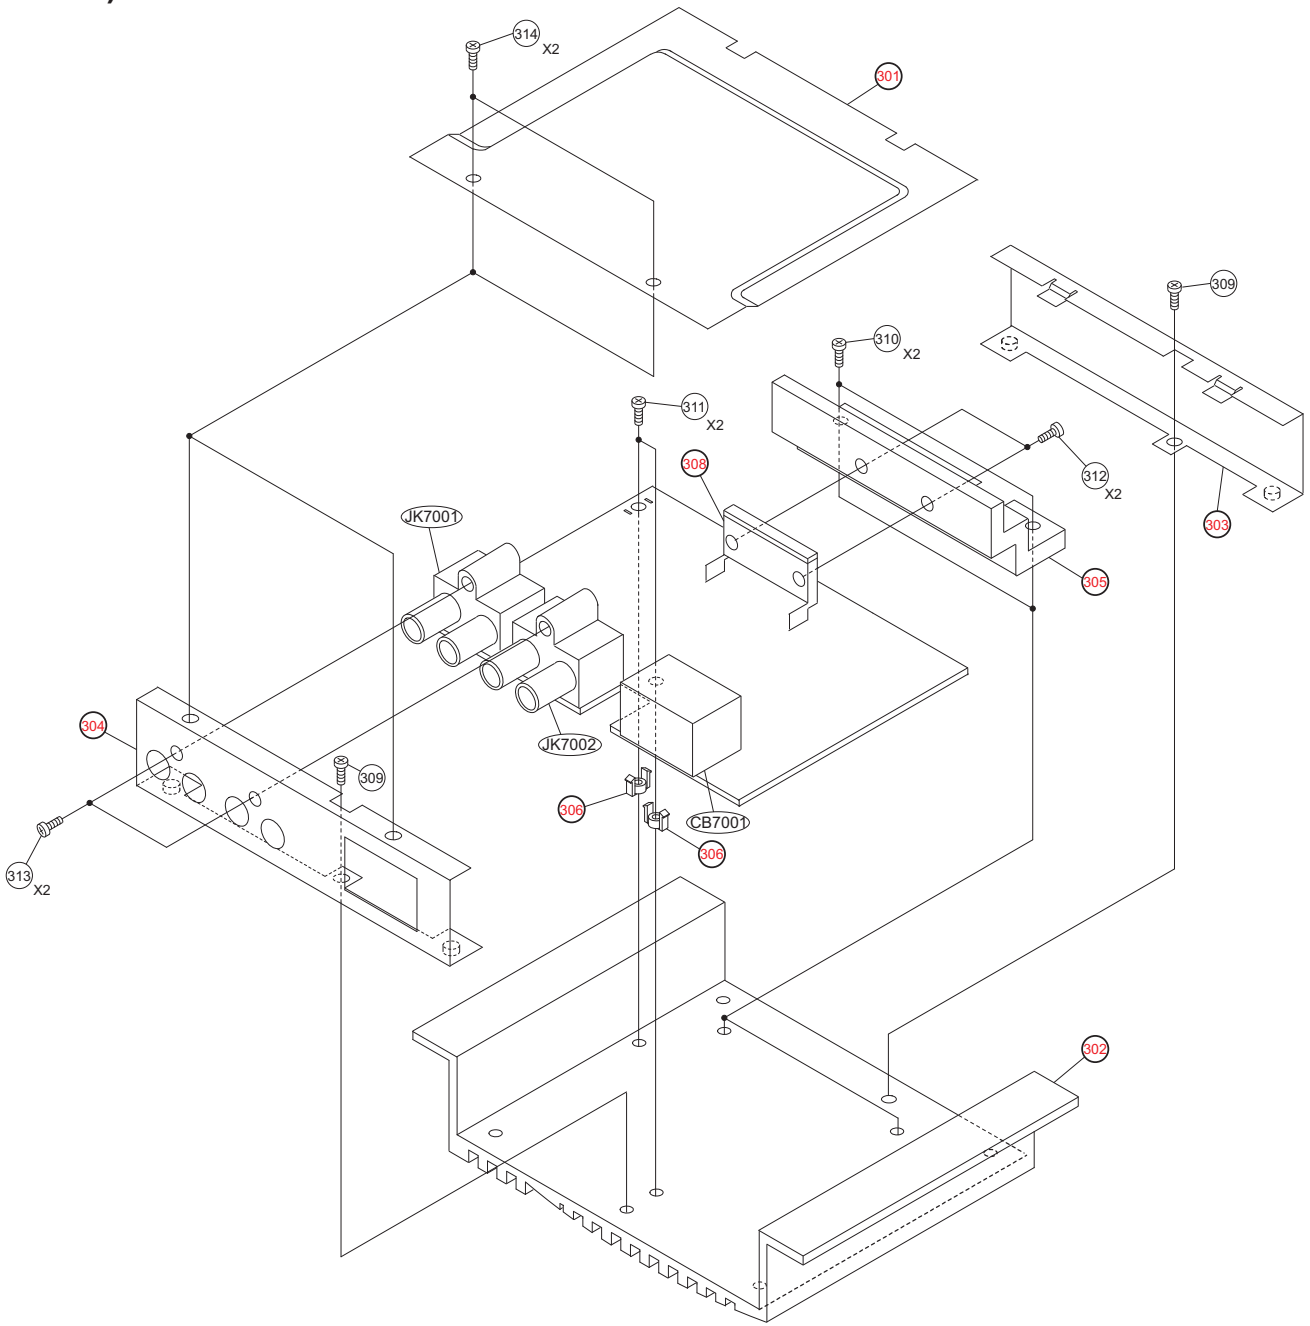

TO PARTS LIST TO CONTENTS

Cabinet Assembly Parts List (Power Amplifier Unit)

NOTE : The part that has not PART NUMBER will not be supplied.

301	- - - - - - - - - - -	COVET,BOTTOM(AMP)
302	- - - - - - - - - - -	HEAT,SINK MAIN(AMP)
303	- - - - - - - - - - -	BKT,FRONT(AMP)
304	- - - - - - - - - - -	BKT,REAR(AMP)
305	- - - - - - - - - - -	HEAT,SINK SUB(AMP)
306	- - - - - - - - - - -	SPACER,PWB(AMP)
308	- - - - - - - - - - -	BKT,IC(AMP)
309	03S60825Y21	SCR,B-T 2.6X5 ZN A
310	03S60825Y11	SCR,B-T 2.6X8 ZN A
311	03S60825Y07	SCR,B-T 2.6X10 ZN A
312	03S60821Y14	SCR,WAS 2.6X14 ZN A
313	03S70693Y30	SCR,P-T 3X10 ZB A
314	03S70694Y24	SCR,TPG 2.6X5 ZB A

Exploded View (Cabinet)

(DC/DC Converter Unit)

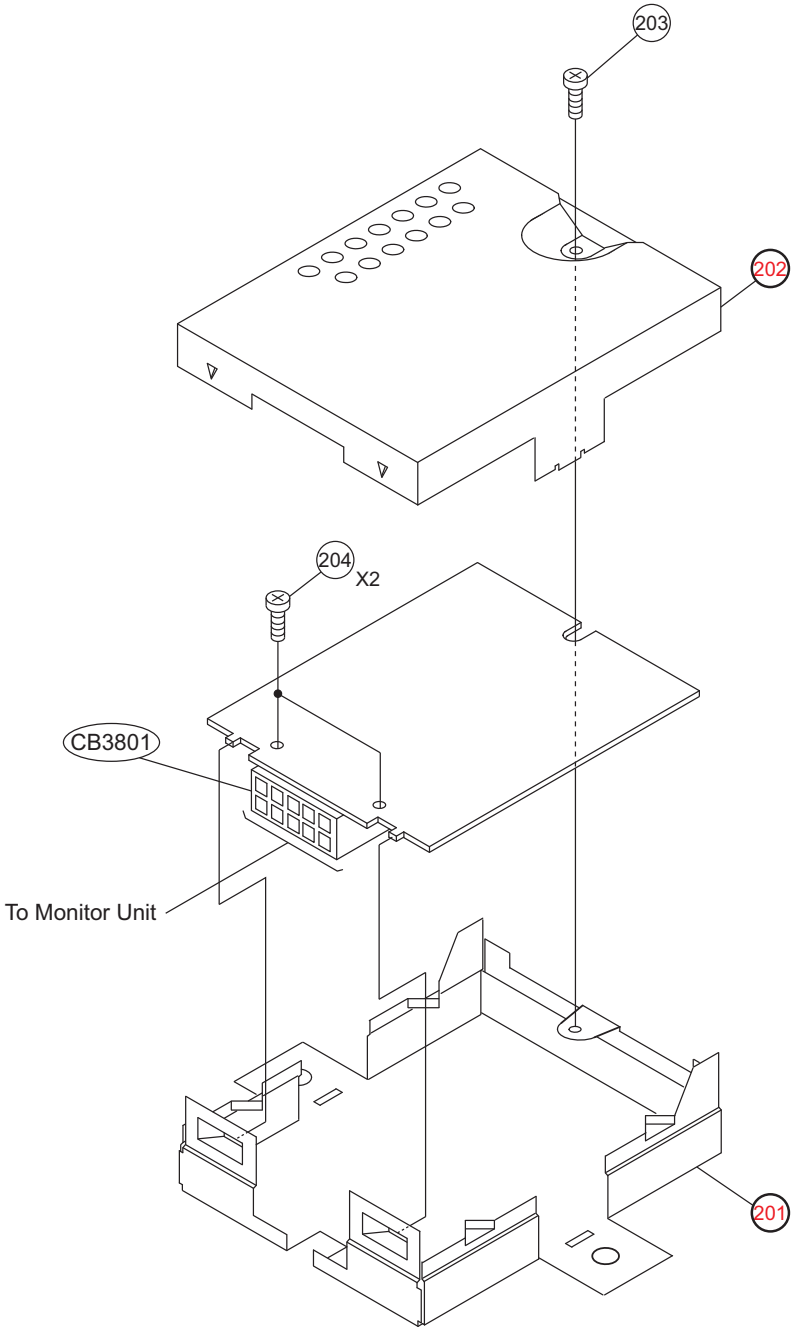

TO PARTS LIST
TO CONTENTS

Cabinet Assembly Parts List (DC/DC Converter Unit)

NOTE : The part that has not PART NUMBER will not be supplied.

201	- - - - - - - - - - -	CHAS,BASE POWER
202	- - - - - - - - - - -	CHAS,TOP POWER
203	03S60822Y13	SCR,S-T 2.6X6 ZN A
204	03S63857F51	SCR,TPG M3X10