Packing Assembly Parts List

Symbol No.	Part No.	Description
101-1	03S60820Y16	SCR,MCH 5X8 ZN A
101-2	03S60824Y01	SCR,WEV 1.7X4 ZN A
101-3	60S70585F01	BAT,LIT.3V (CR2025)
101-4	75T58346F17	PAD,MAGIC TAPE
102	15-01970Z01	CASE,INNER
103	15D01798K03	CARRYING,CASE
104	07-01964Z01	BKT,RELEASE

Symbol No.	Part No.	Description
105	09-01538Z03	ASSY,POWER WIRE9851
#1 106	68-02278Z17	O/M AOAM AODL
$1 106	68-02278Z21	O/M AAO AODL
%1 106	68-02278Z21	O/M AAO AODL
&1 106	68-02770Z08	O/M,AOCH 9860
107	97-02173Z01	ASSY,SBNN00003A
108	01T25634Y04	ASSY,STEERING 9860

NOTE:#1:For North American Model Only, $1:For General Foreign/REGION3 Model Only, %1:For General Foreign/REGION4 Model Only, &1:For Chinese Model Only, Others:Common.

Packing Method View

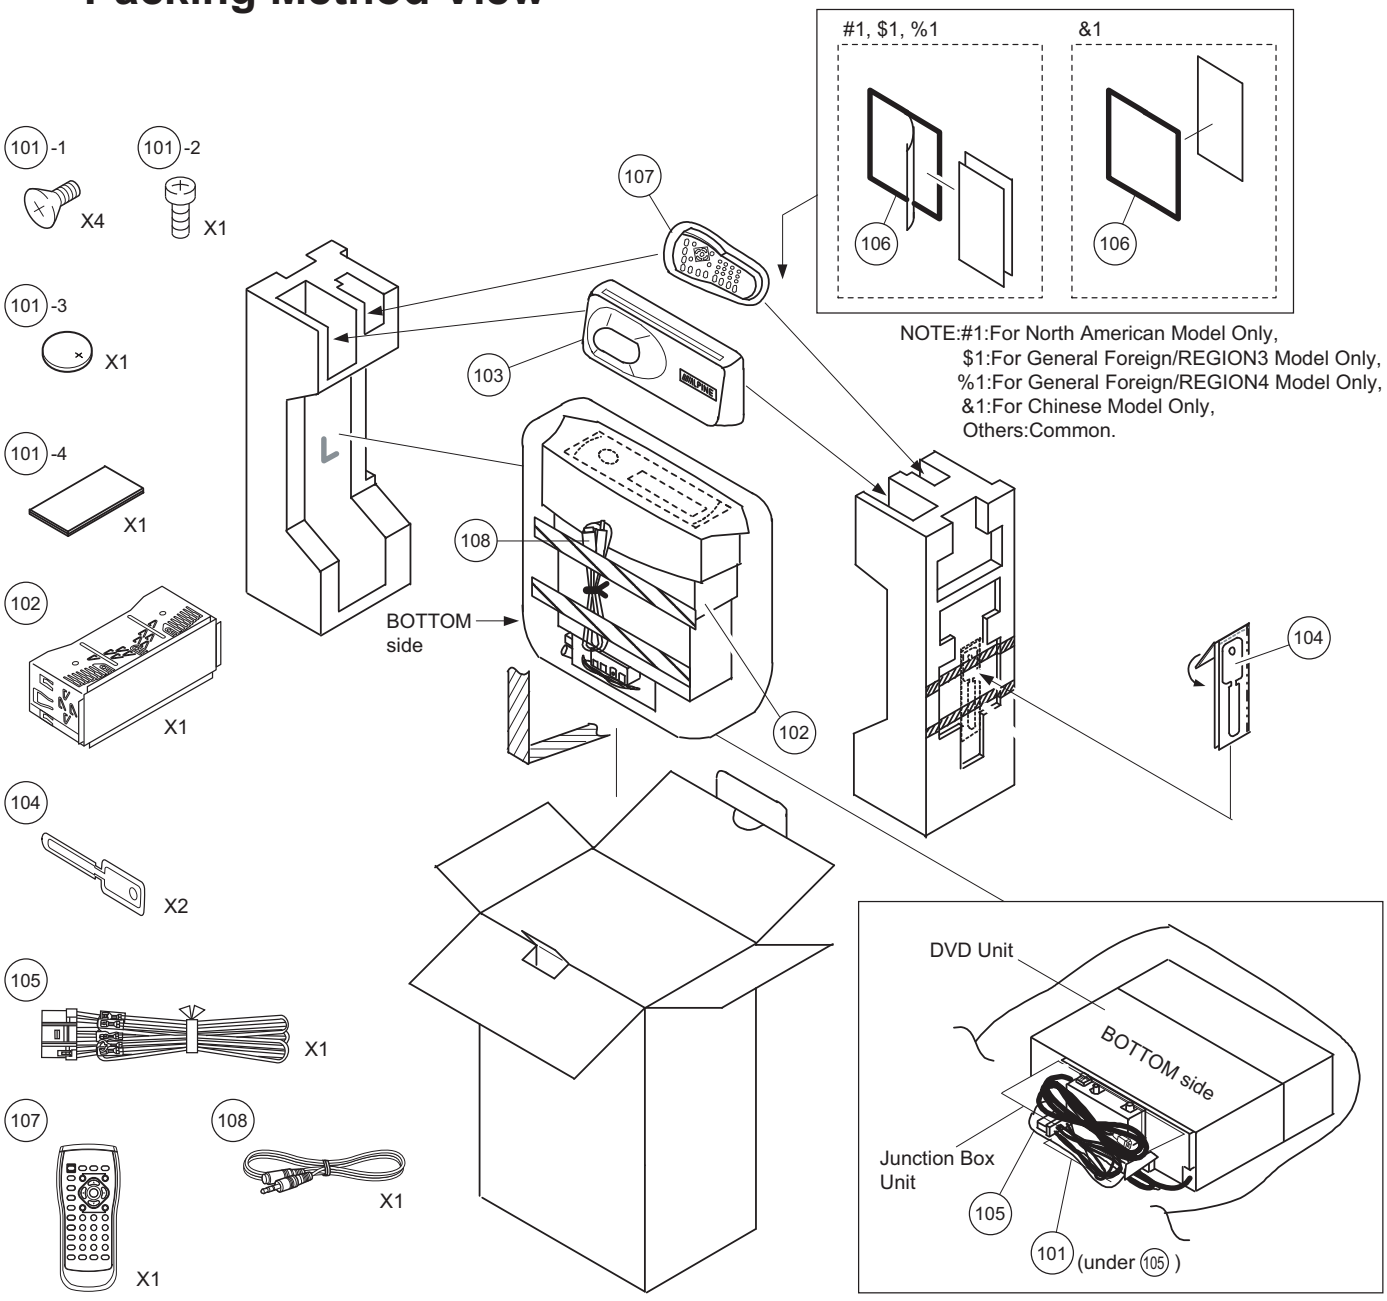

TO CONTENTS

System Connections

(North American Model Only)

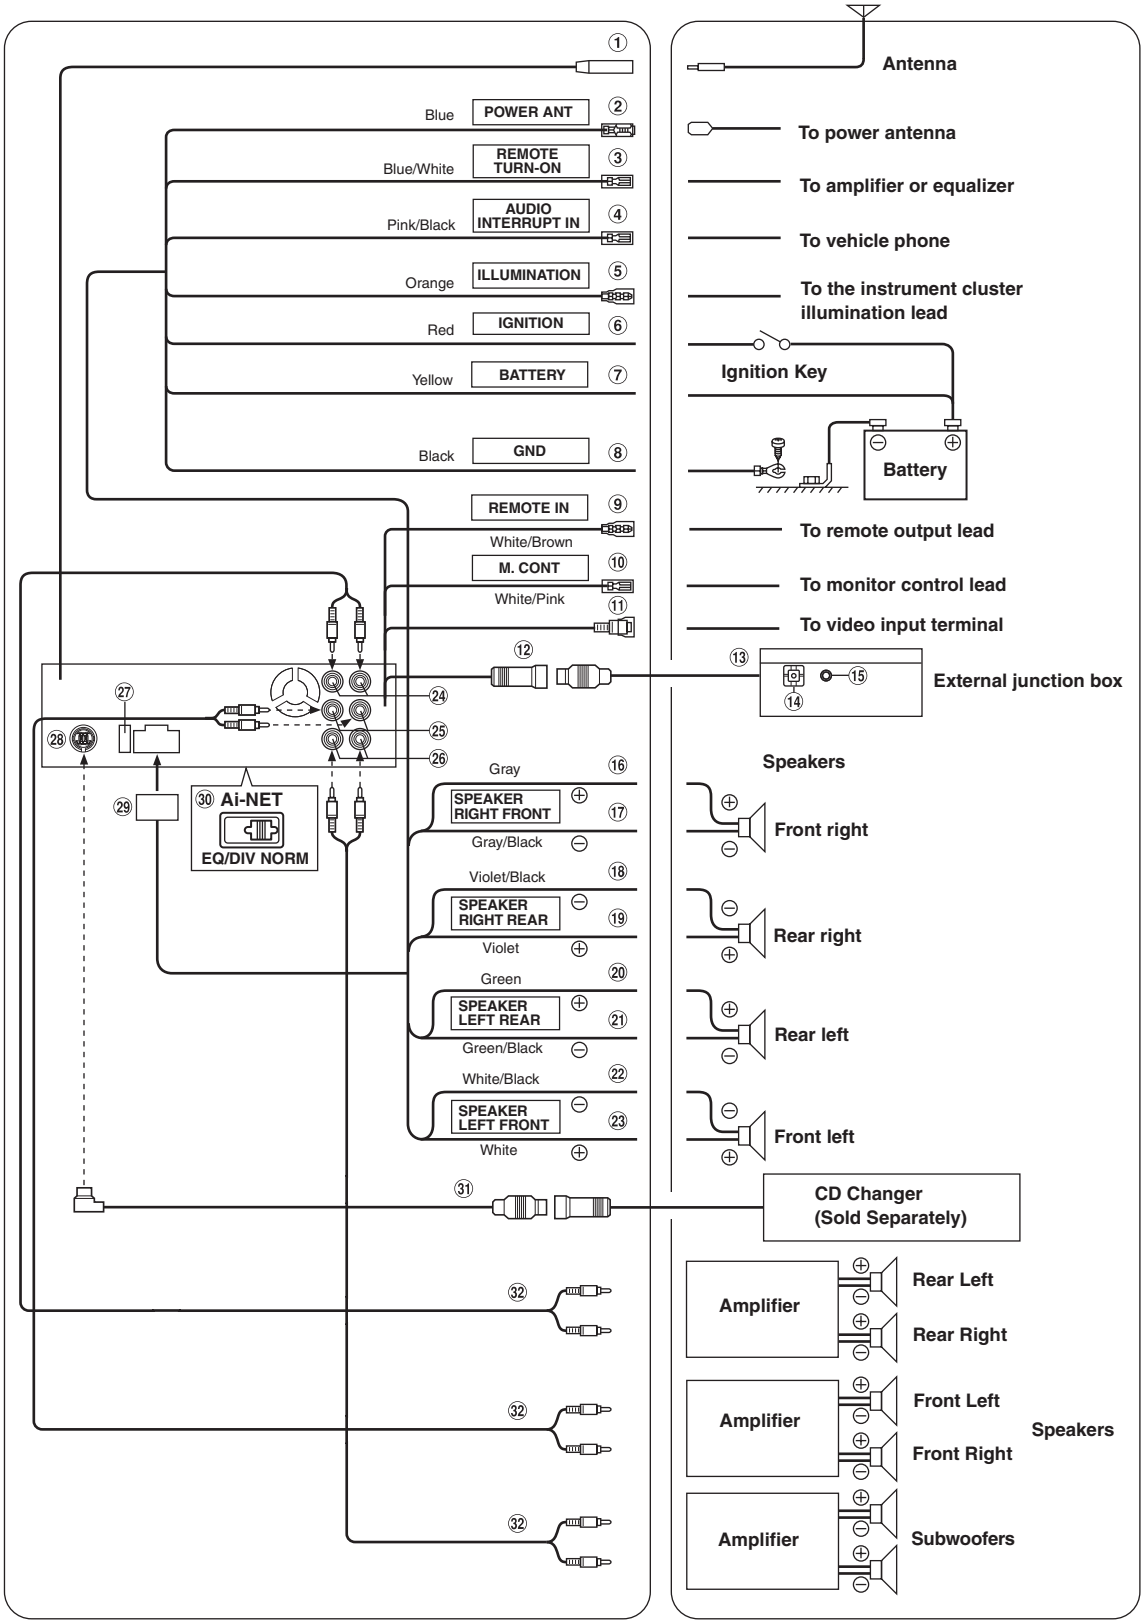

TO CONTENTS

① Antenna Receptacle

② Power Antenna Lead (Blue)
Connect this lead to the +B terminal of your power antenna, if applicable.

NOTE
This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.

③ Remote Turn-On Lead (Blue/White)
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

④ Audio Interrupt In Lead (Pink/Black)

⑤ Illumination Lead (Orange)
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the DVA-9860 to dim whenever the vehicle's lights are turned on.

⑥ Switched Power Lead (Ignition) (Red)
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.

⑦ Battery Lead (Yellow)
Connect this lead to the positive (+) post of the vehicle's battery.

⑧ Ground Lead (Black)
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑨ Remote Control Input Lead (White/Brown)
Connect the external Alpine product to the remote control output llead.

⑩ Monitor Control Lead (White/Pink)
Connect this to the Monitor Control Lead of the touch panel-compatible monitor.

⑪ Video Output Connector
This connector is used in combination with the video inputs of another video product (Touch panel compatible monitor, etc.)

⑫ External Junction Box Connector
Connect to the external junction Box (included)

⑬ External Junction Box
Use when connecting optical digital cable or the remote control interface box.
Connect to the external junction box connector.
- *Do not install the external junction box at a location subjected to water such as under the floor mat or air conditioner. This may cause a malfunction.*
- *Do not bundle the external junction box cable with other audio cables. Doing so may induce noise into your system.*
- *Keep the external junction box away from the Antenna cables and the rear side of the unit, otherwise noise may be generated when receiving radio broadcast.*

⑭ Digital Output Terminal (Optical)
Use when combining optical digital input compatible products.

⑮ Remote Control Interface Connector
Connect to the remote control inerface box.
- *Use a steering remote control extension cabel (included) if necessary.*

⑯ Right Front (+) Speaker Output Lead (Gray)

⑰ Right Front (–) Speaker Output Lead (Gray/Black)

⑱ Right Rear (–) Speaker Output Lead (Violet/Black)

⑲ Right Rear (+) Speaker Output Lead (Violet)

⑳ Left Rear (+) Speaker Output Lead (Green)

㉑ Left Rear (–) Speaker Output Lead (Green/Black)

㉒ Left Front (–) Speaker Output Lead (White/Black)

㉓ Left Front (+) Speaker Output Lead (White)

㉔ Rear Output RCA Connectors
RED is right and WHITE is left.

㉕ Front Output RCA Connectors
RED is right and WHITE is left.

㉖ Subwoofer RCA Connectors
RED is right and WHITE is left.

㉗ Fuse Holder (10A)

㉘ Ai-NET Connector
Connect this to the output or input connector of other product (CD Changer, Equalizer, iPod adapter,* etc.) equipped with Ai-NET.

NOTES
You can input TV/video sound by connecting an optional Ai-NET/RCA Interface cable (KCA-121B) to this component.

* If you connect to the iPod, you need the optional adapter (KCA-420i). For details on connection, refer to the Owner's Manual of the KCA-420i.

㉙ Power Supply Connector

㉚ System Switch
When connecting a processor or divider using Ai-NET, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

NOTE
Be sure to turn the power off to the unit before changing the switch position.

㉛ Ai-NET Cable (Included with CD Changer)

㉜ RCA Extension Cable (Sold Separately)

To prevent external noise from entering the audio system.
- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

TO CONTENTS

System Example

Connect the Ai-NET compatible digital audio processor (Fiber digital compatible) and touch panel compatible monitor/changer

System switch	EQ/DIV

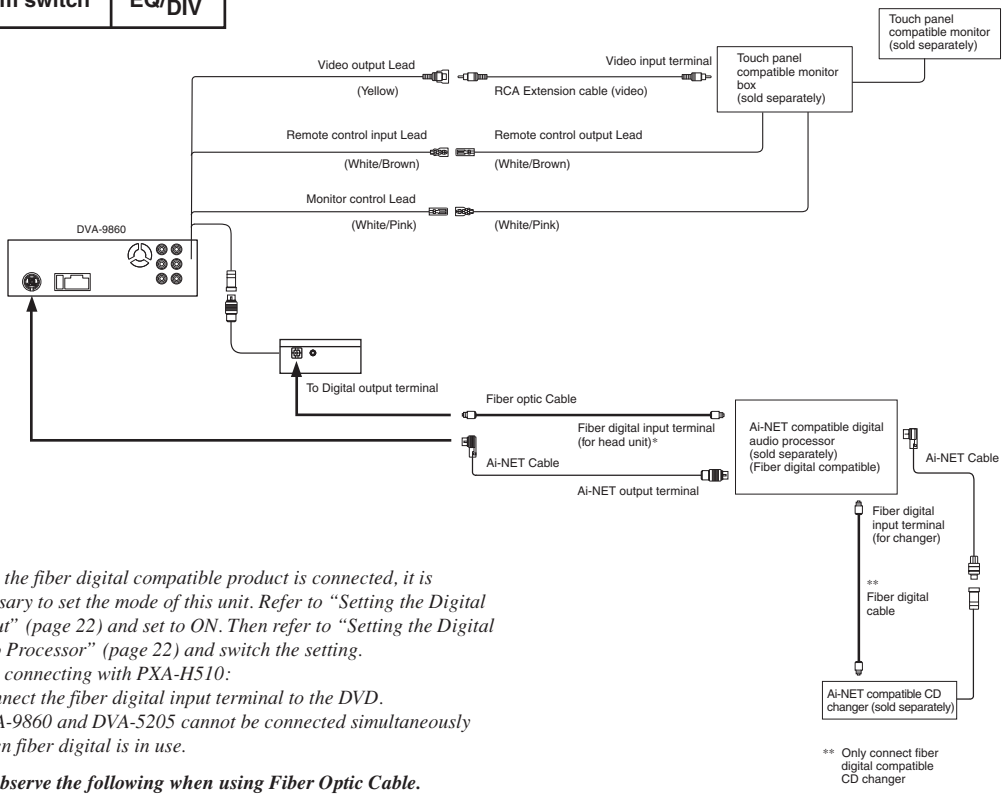

- *When the fiber digital compatible product is connected, it is necessary to set the mode of this unit. Refer to "Setting the Digital Output" (page 22) and set to ON. Then refer to "Setting the Digital Audio Processor" (page 22) and switch the setting.*

* *When connecting with PXA-H510:*
- *Connect the fiber digital input terminal to the DVD.*
- *DVA-9860 and DVA-5205 cannot be connected simultaneously when fiber digital is in use.*

Please observe the following when using Fiber Optic Cable.
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*
- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*

TO CONTENTS

(General Foreign Model Only)

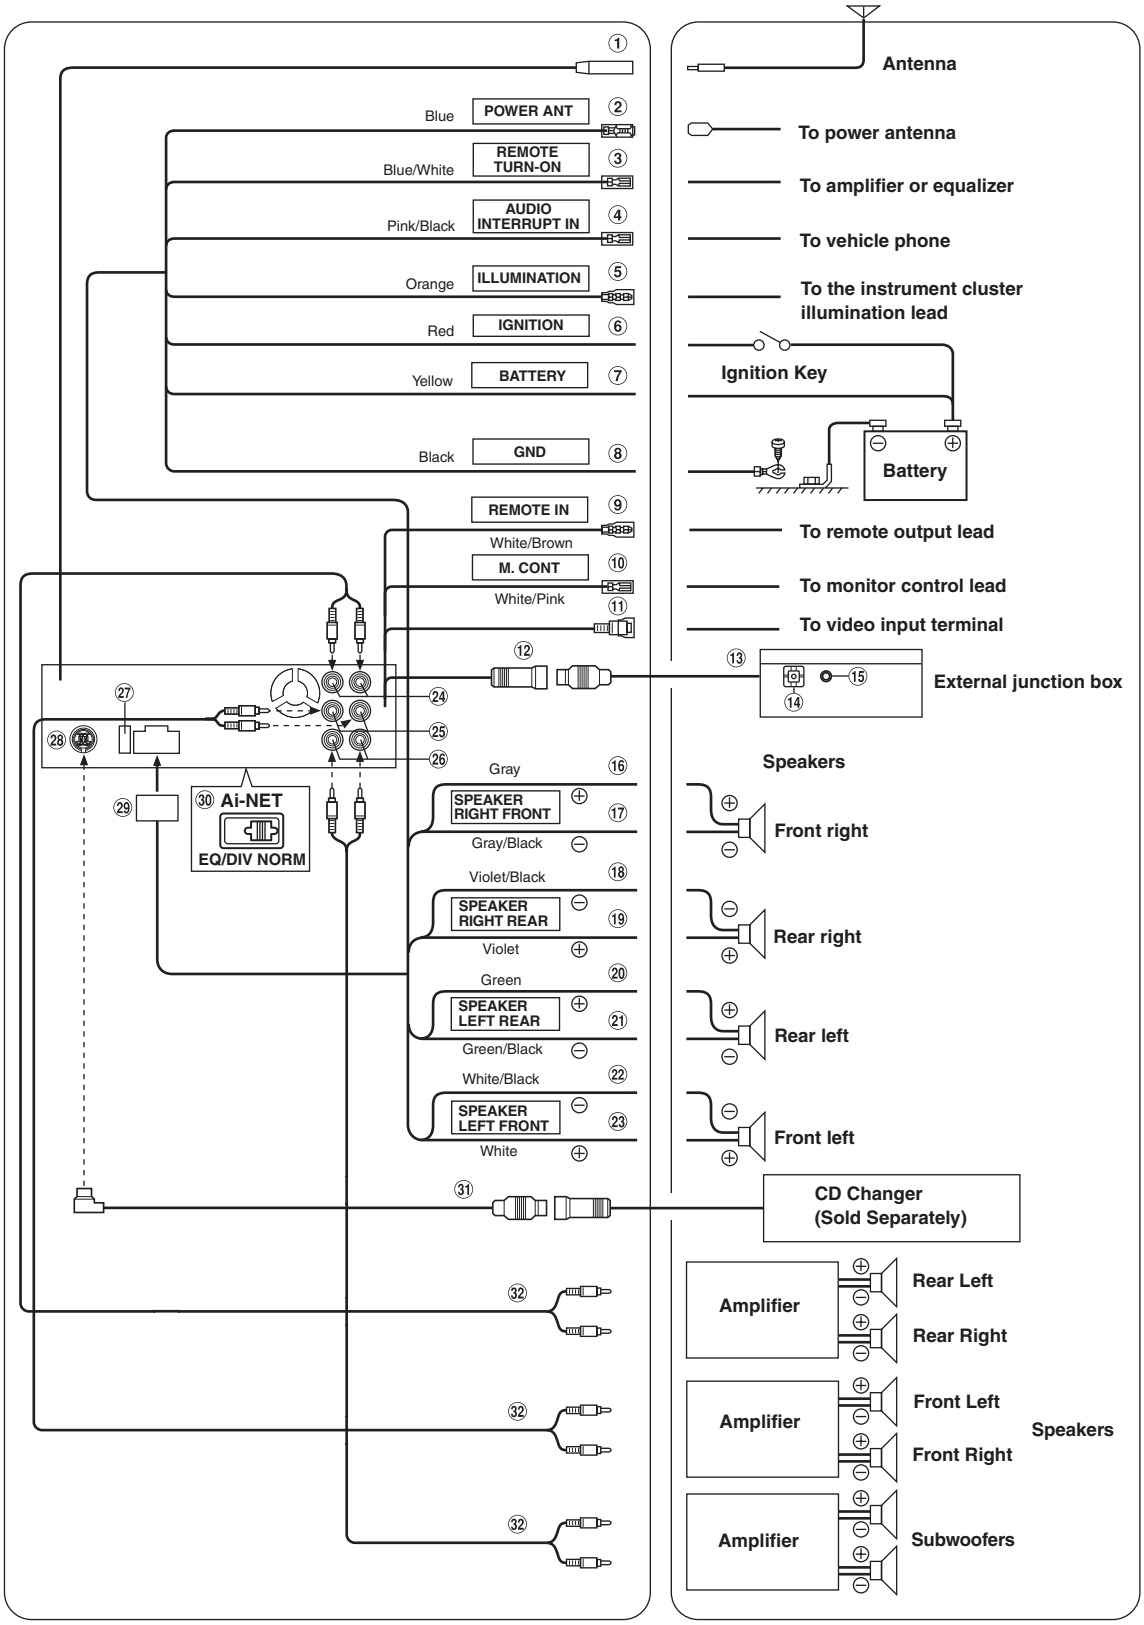

TO CONTENTS

① Antenna Receptacle

② Power Antenna Lead (Blue)
Connect this lead to the +B terminal of your power antenna, if applicable.

NOTE
This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.

③ Remote Turn-On Lead (Blue/White)
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

④ Audio Interrupt In Lead (Pink/Black)

⑤ Illumination Lead (Orange)
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the DVA-9860E to dim whenever the vehicle's lights are turned on.

⑥ Switched Power Lead (Ignition) (Red)
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.

⑦ Battery Lead (Yellow)
Connect this lead to the positive (+) post of the vehicle's battery.

⑧ Ground Lead (Black)
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑨ Remote Control Input Lead (White/Brown)
Connect the external Alpine product to the remote control output llead.

⑩ Monitor Control Lead (White/Pink)
Connect this to the Monitor Control Lead of the touch panel-compatible monitor.

⑪ Video Output Connector
This connector is used in combination with the video inputs of another video product (Touch panel compatible monitor, etc.).

⑫ External Junction Box Connector
Connect to the external junction Box (included)

⑬ External Junction Box
Use when connecting optical digital cable or the remote control interface box.
Connect to the external junction box connector.
- *Do not install the external junction box at a location subjected to water such as under the floor mat or air conditioner. This may cause a malfunction.*
- *Do not bundle the external junction box cable with other audio cables. Doing so may induce noise into your system.*
- *Keep the external junction box away from the Antenna cables and the rear side of the unit, otherwise noise may be generated when receiving radio broadcast.*

⑭ Digital Output Terminal (Optical)
Use when combining optical digital input compatible products.

⑮ Remote Control Interface Connector
Connect to the remote control inerface box.
- *Use a steering remote control extension cabel (included) if necessary.*

⑯ Right Front (+) Speaker Output Lead (Gray)

⑰ Right Front (–) Speaker Output Lead (Gray/Black)

⑱ Right Rear (–) Speaker Output Lead (Violet/Black)

⑲ Right Rear (+) Speaker Output Lead (Violet)

⑳ Left Rear (+) Speaker Output Lead (Green)

㉑ Left Rear (–) Speaker Output Lead (Green/Black)

㉒ Left Front (–) Speaker Output Lead (White/Black)

㉓ Left Front (+) Speaker Output Lead (White)

㉔ Rear Output RCA Connectors
RED is right and WHITE is left.

㉕ Front Output RCA Connectors
RED is right and WHITE is left.

㉖ Subwoofer RCA Connectors
RED is right and WHITE is left.

㉗ Fuse Holder (10A)

㉘ Ai-NET Connector
Connect this to the output or input connector of other product (CD Changer, Equalizer, iPod adapter,* etc.) equipped with Ai-NET.

NOTES
You can input TV/video sound by connecting an optional Ai-NET/RCA Interface cable (KCA-121B) to this component.

* If you connect to the iPod, you need the optional adapter (KCA-420i). For details on connection, refer to the Owner's Manual of the KCA-420i.

㉙ Power Supply Connector

㉚ System Switch
When connecting a processor or divider using Ai-NET, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

NOTE
Be sure to turn the power off to the unit before changing the switch position.

㉛ Ai-NET Cable (Included with CD Changer)

㉜ RCA Extension Cable (Sold Separately)

To prevent external noise from entering the audio system.
- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

TO CONTENTS

System Example

Connect the Ai-NET compatible digital audio processor (Fiber digital compatible) and touch panel compatible monitor/changer

System switch	EQ/DIV

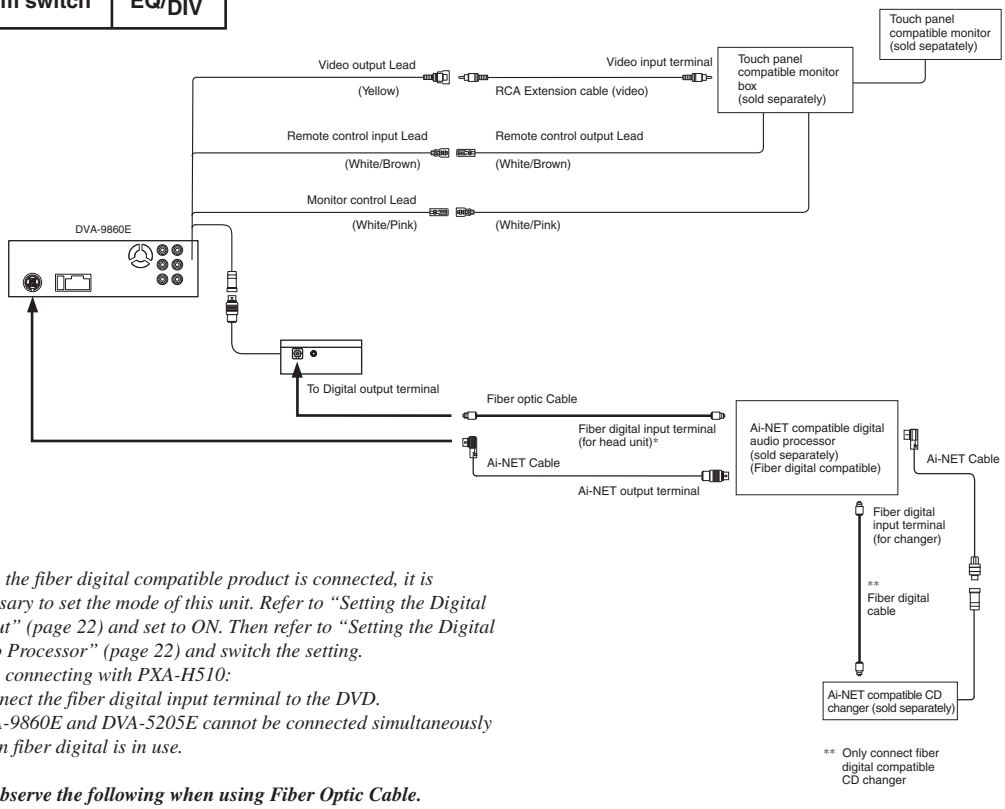

- *When the fiber digital compatible product is connected, it is necessary to set the mode of this unit. Refer to "Setting the Digital Output" (page 22) and set to ON. Then refer to "Setting the Digital Audio Processor" (page 22) and switch the setting.*

* *When connecting with PXA-H510:*
- *Connect the fiber digital input terminal to the DVD.*
- *DVA-9860E and DVA-5205E cannot be connected simultaneously when fiber digital is in use.*

Please observe the following when using Fiber Optic Cable.
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*
- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*

TO CONTENTS

Extension Cable

*Always connect the Extension Cable when making checks of voltage and repair.

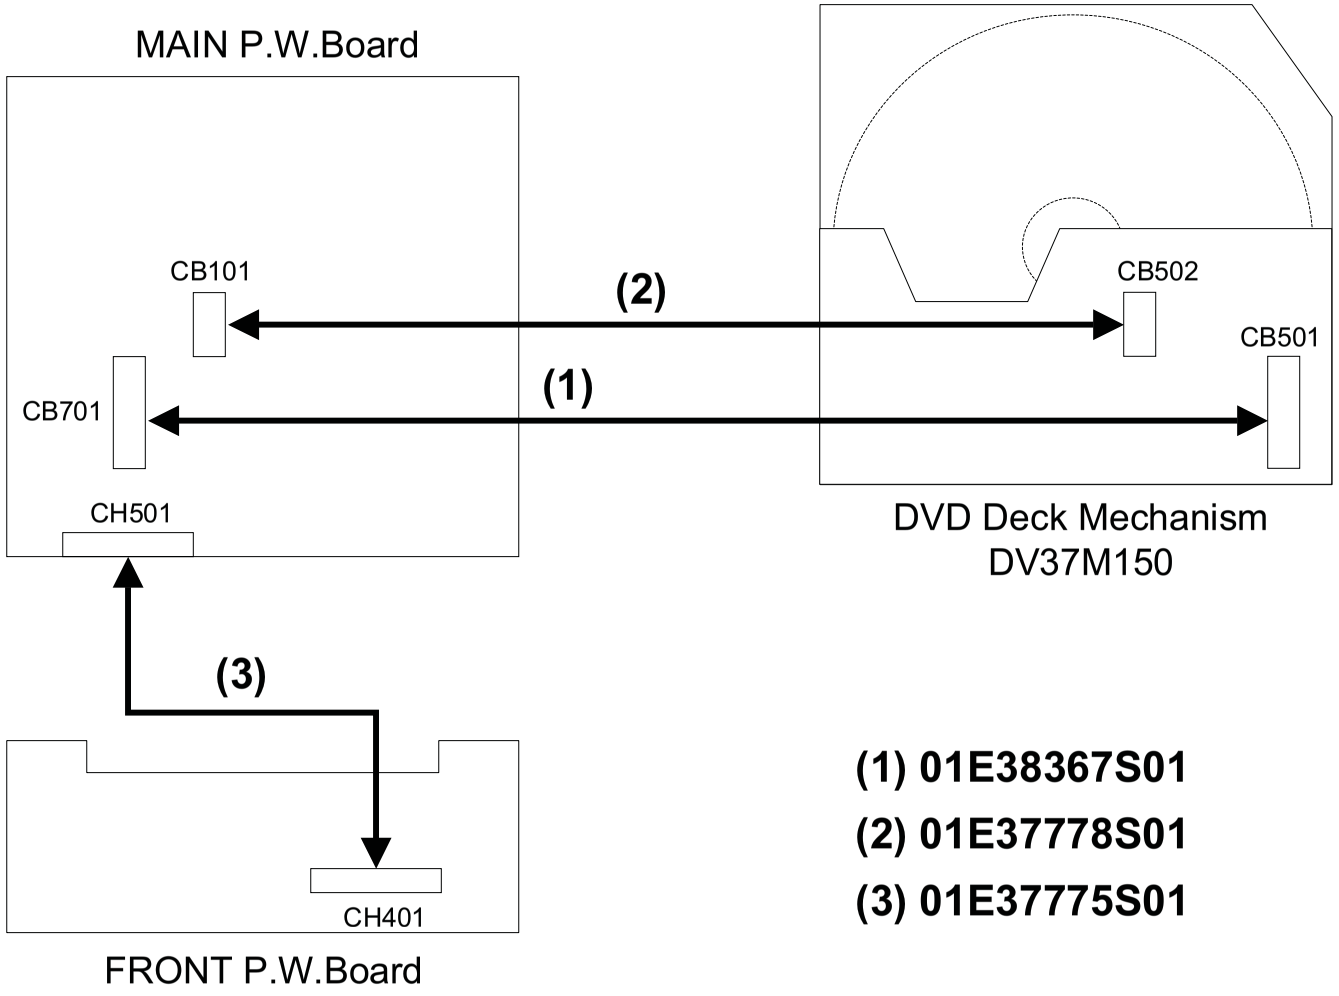

(1) 01E38367S01

(2) 01E37778S01

(3) 01E37775S01

TO CONTENTS

Electrical Parts List (DVD Unit)

* Each parts on P.W.Board are described in order of the reference number.

NOTE : #1 : For North American Model Only,
$1 : For General Foreign(Region3) Model Only,
%1 : For General Foreign(Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

IC501(*) : As for the parts of part number of (*) mark, a product does not operate for program un-writing in. When you order a microcomputer, please give me order after specifying part number and a product name.

=======MAIN P.W.Board

C003	08S45676W85	CAP,CER 104K-B1C -CP
C004	08S45676W85	CAP,CER 104K-B1C -CP
C009	08S65669Y01	CAP,CER 334KX7R1E-CP
C019	08S45677W60	CAP,CER 102J-CH1H-CP
C020	08S45677W60	CAP,CER 102J-CH1H-CP
C105	08S65670Y01	CAP,CER 106KX5R1C-CP
C106	08S45676W65	CAP,CER.222K-B1H -CP
C107	08S65670Y01	CAP,CER 106KX5R1C-CP
C108	08S45676W80	CAP,CER 223K-B1E -CP
C109	08S45676W80	CAP,CER 223K-B1E -CP
C110	08S65670Y01	CAP,CER 106KX5R1C-CP
C111	08S45677W50	CAP,CER 391J-CH1H-CP
C112	08S65670Y03	CAP,CER 335KX5R1E-CP
C113	08S65670Y03	CAP,CER 335KX5R1E-CP
C114	08S45677W48	CAP,CER.331J-CH1H-CP
C115	08S45677W48	CAP,CER.331J-CH1H-CP
C116	08S45677W38	CAP,CER 121J-CH1H-CP
C117	08S45677W38	CAP,CER 121J-CH1H-CP
C118	08S45677W50	CAP,CER 391J-CH1H-CP
C119	08S45677W34	CAP,CER.82RJ-CH1H-CP
C120	08S45677W34	CAP,CER.82RJ-CH1H-CP
C125	08S45676W80	CAP,CER 223K-B1E -CP
C126	08S65670Y01	CAP,CER 106KX5R1C-CP
C129	08S65670Y01	CAP,CER 106KX5R1C-CP
C130	08S45676W80	CAP,CER 223K-B1E -CP
C201	08S45676W73	CAP,CER.103K-B1H -CP
C202	08S45676W84	CAP,CER 683K-B1C -CP
C203	08S45677W52	CAP,CER 471J-CH1H-CP
C204	08S45676W84	CAP,CER 683K-B1C -CP
C205	08S45677W52	CAP,CER 471J-CH1H-CP
C206	08S45676W83	CAP,CER 473K-B1C -CP
C207	08S45676W73	CAP,CER.103K-B1H -CP
C208	08S45676W83	CAP,CER 473K-B1C -CP
C209	08S45676W73	CAP,CER.103K-B1H -CP
C210	08S45676W85	CAP,CER 104K-B1C -CP
C211	08S45676W85	CAP,CER 104K-B1C -CP
C213	08S45677W60	CAP,CER 102J-CH1H-CP
C214	08S45677W60	CAP,CER 102J-CH1H-CP
C215	08S45677W60	CAP,CER 102J-CH1H-CP
C216	08S45676W73	CAP,CER.103K-B1H -CP
C217	08S45676W73	CAP,CER.103K-B1H -CP

C218	08S45677W60	CAP,CER 102J-CH1H-CP
C301	08S45677W48	CAP,CER.331J-CH1H-CP
C307	08S65670Y02	CAP,CER 225KX5R1E-CP
C308	08S65670Y02	CAP,CER 225KX5R1E-CP
C309	08S65670Y02	CAP,CER 225KX5R1E-CP
C310	08S65670Y02	CAP,CER 225KX5R1E-CP
C311	08S65670Y02	CAP,CER 225KX5R1E-CP
C312	08S65670Y02	CAP,CER 225KX5R1E-CP
C501	08S45677W60	CAP,CER 102J-CH1H-CP
C502	08S65676Y02	CAP,CER 475KX7R1A-CP
C503	08S45677W14	CAP,CER.12RJ-CH1H-CP
C504	08S45677W16	CAP,CER.15RJ-CH1H-CP
C505	08S45676W85	CAP,CER 104K-B1C -CP
C506	08S45676W83	CAP,CER 473K-B1C -CP
C507	08S65674Y02	CAP,CER 105KX5R1A-CP
C508	08S45676W80	CAP,CER 223K-B1E -CP
C509	08S45676W80	CAP,CER 223K-B1E -CP
C510	08S45677W22	CAP,CER.27RJ-CH1H-CP
C511	08S45677W36	CAP,CER.101J-CH1H-CP
C515	08S45676W80	CAP,CER 223K-B1E -CP
C516	08S45676W80	CAP,CER 223K-B1E -CP
C517	08S45676W80	CAP,CER 223K-B1E -CP
C518	08S45676W80	CAP,CER 223K-B1E -CP
C520	08S45676W80	CAP,CER 223K-B1E -CP
C521	08S45676W85	CAP,CER 104K-B1C -CP
C522	08S45676W73	CAP,CER.103K-B1H -CP
C606	08S45676W85	CAP,CER 104K-B1C -CP
C607	08S45676W80	CAP,CER 223K-B1E -CP
C608	08S45676W65	CAP,CER.222K-B1H -CP
C609	08S45677W36	CAP,CER.101J-CH1H-CP
C610	08S45676W80	CAP,CER 223K-B1E -CP
C611	08S45676W80	CAP,CER 223K-B1E -CP
C705	08S45677W28	CAP,CER 47RJ-CH1H-CP
C706	08S45677W30	CAP,CER.56RJ-CH1H-CP
C707	08S45676W80	CAP,CER 223K-B1E -CP
C709	08S65669Y01	CAP,CER 334KX7R1E-CP
C710	08S45676W80	CAP,CER 223K-B1E -CP
C712	08S65669Y01	CAP,CER 334KX7R1E-CP
C713	08S45677W26	CAP,CER.39RJ-CH1H-CP
C714	08S45677W14	CAP,CER.12RJ-CH1H-CP
C716	08S45676W80	CAP,CER 223K-B1E -CP
C717	08S35374W08	CAP,CER 474K-B1C -CP
C718	08S65669Y01	CAP,CER 334KX7R1E-CP
C719	08S45676W80	CAP,CER 223K-B1E -CP
C720	08S65669Y01	CAP,CER 334KX7R1E-CP
C721	08S45676W80	CAP,CER 223K-B1E -CP
C723	08S45676W80	CAP,CER 223K-B1E -CP
C724	08S65669Y01	CAP,CER 334KX7R1E-CP
C725	08S45676W80	CAP,CER 223K-B1E -CP
C727	08S65669Y01	CAP,CER 334KX7R1E-CP
C729	08S45676W65	CAP,CER.222K-B1H -CP
C730	08S45676W65	CAP,CER.222K-B1H -CP
C801	08S65667Y01	CAP,CER 224KX5R1C-CP
C802	08S45676W85	CAP,CER 104K-B1C -CP
C804	08S45677W36	CAP,CER.101J-CH1H-CP
C805	08S65667Y01	CAP,CER 224KX5R1C-CP
C806	08S60102F44	CAP,CER 474K-B1E -CP

C807	08S45676W85	CAP,CER 104K-B1C -CP
C808	08S45676W85	CAP,CER 104K-B1C -CP
C809	08S65667Y01	CAP,CER 224KX5R1C-CP
C810	08S45676W85	CAP,CER 104K-B1C -CP
C811	08S45676W85	CAP,CER 104K-B1C -CP
C812	08S45676W85	CAP,CER 104K-B1C -CP
C813	08S45676W85	CAP,CER 104K-B1C -CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C815	08T25628Y03	CAP,TF 224M-1C -CP
C816	08T25628Y03	CAP,TF 224M-1C -CP
C817	08T25628Y03	CAP,TF 224M-1C -CP
C818	08T25628Y03	CAP,TF 224M-1C -CP
C819	08S65674Y02	CAP,CER 105KX5R1A-CP
C820	08S65667Y01	CAP,CER 224KX5R1C-CP
C821	08S45677W60	CAP,CER 102J-CH1H-CP
C822	08S45676W83	CAP,CER 473K-B1C -CP
C823	08S65667Y01	CAP,CER 224KX5R1C-CP
C824	08S45676W80	CAP,CER 223K-B1E -CP
C825	08S45539Y04	CAP,CER 103KX7R2J-CP
C826	08S45539Y04	CAP,CER 103KX7R2J-CP
C827	08S45539Y04	CAP,CER 103KX7R2J-CP
C828	08S45539Y04	CAP,CER 103KX7R2J-CP
C829	08S45539Y04	CAP,CER 103KX7R2J-CP
C830	08S45539Y04	CAP,CER 103KX7R2J-CP
C831	08S45676W80	CAP,CER 223K-B1E -CP
C832	08S65667Y02	CAP,CER 334KX5R1A-CP
CB101	09T15107Y24	FFC,52435-2491 -ED
CB102	09T03498K04	WTB,53253-0410 -DB
CB301	09T03498K02	WTB,53253-0210 -DB
CB602	09T03498K03	WTB,53253-0310 -DB
CB701	09T45442Y45	FFC,54104-4592 -EQ
CB801	09T03498K02	WTB,53253-0210 -DB
CB803	09T55229W02	WTB,SC25-02WL -DB
D001	48T85357W01	DIO,1PS226 -CP
D501	48T25651W02	DIO,MA152WK-TX -CP
D502	48T25651W01	DIO,CP MA152WA
D503	48T68828F11	DIO,1SS133 -RH
D603	48T25651W02	DIO,MA152WK-TX -CP
D802	48T25593Y01	DIO,S1G-6904 -E1
D803	48T44813F03	DIO,MA165 -R5
D804	48T25593Y01	DIO,S1G-6904 -E1
D805	48T25593Y01	DIO,S1G-6904 -E1
D806	48T25651W02	DIO,MA152WK-TX -CP
D807	48T25665Y01	DIO,1SS355-TE17 -CP
D808	48T02162K01	DIO,SHT SRT14 -A5
D809	48T02162K01	DIO,SHT SRT14 -A5
D810	48T02162K01	DIO,SHT SRT14 -A5
D811	48T02162K01	DIO,SHT SRT14 -A5
D812	48T02162K01	DIO,SHT SRT14 -A5
D813	48T02162K01	DIO,SHT SRT14 -A5
D814	48T02162K01	DIO,SHT SRT14 -A5
D815	48T02162K01	DIO,SHT SRT14 -A5
D816	48T25593Y01	DIO,S1G-6904 -E1
D817	48T68580F03	DIO,SI DSA3A4-F5
D818	48T25651W02	DIO,MA152WK-TX -CP
D819	48T25665Y01	DIO,1SS355-TE17 -CP
E001	23S45639Y05	CAP,ELY 101-1A -R2

E002	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E003	23S45639Y09	CAP,ELY 47R-1C -R2
E006	23S65134W46	CAP,ELY 47R-1E(6)-E6
E101	23S45639Y08	CAP,ELY 22R-1C -R2
E201	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E202	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E203	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E205	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E206	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E207	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E208	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E209	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E210	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E212	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E213	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E214	23S45639Y09	CAP,ELY 47R-1C -R2
E215	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E216	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E217	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E218	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E219	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E220	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E221	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E222	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E223	23S65134W41	CAP,ELY 4R7-1E(3)-E2
E301	23S45639Y24	CAP,ELY 3R3-1H -R2
E501	23S45639Y03	CAP,ELY 331-0J -R2
E502	23S45639Y08	CAP,ELY 22R-1C -R2
E503	23S45639Y03	CAP,ELY 331-0J -R2
E504	23S45639Y11	CAP,ELY 33R-1E -R2
E701	23S65134W14	CAP,ELY 221-0J(8)-E6
E702	23S65134W24	CAP,ELY 221-1A(8)-E6
E703	23S65134W14	CAP,ELY 221-0J(8)-E6
E704	23S45639Y05	CAP,ELY 101-1A -R2
E705	23S65134W38	CAP,ELY 471-1C(1)-EA
E706	23S75244Y22	CAP,ELY 471-1C -EA
E707	23S75244Y22	CAP,ELY 471-1C -EA
E708	23S65134W14	CAP,ELY 221-0J(8)-E6
E710	23S45639Y05	CAP,ELY 101-1A -R2
E711	23S45639Y05	CAP,ELY 101-1A -R2
E712	23S65134W24	CAP,ELY 221-1A(8)-E6
E713	23S65134W38	CAP,ELY 471-1C(1)-EA
E714	23S65134W24	CAP,ELY 221-1A(8)-E6
E715	23S65134W54	CAP,ELY 10R-1V(5)-E3
E801	23S65134W26	CAP,ELY 471-1A(8)-EA
E802	23S45639Y06	CAP,ELY 221-1A -R2
E803	23S65134W36	CAP,ELY 221-1C(8)-EA
E804	23S45639Y09	CAP,ELY 47R-1C -R2
E805	23S65134W65	CAP,ELY 1R0-1H(3)-E2
E806	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E807	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E808	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E809	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E810	23S65134W32	CAP,ELY 22R-1C(5)-E3
E811	23S65134W31	CAP,ELY 10R-1C(4)-E2
E812	23S65134W62	CAP,ELY R22-1H(3)-E2
E813	23T75325Y01	CAP,VB 332-1C +

F801	65T75477Y13	FUSE,CCP2E 4.0A -CP
IC002	51T75197W10	AN77L10M-E1 -NE2
IC101	51T55240Y01	PCM1742KE -SE2
IC102	51T25576W07	NJM4580V-TE2 -SE2
IC104	51T25183Y02	TC7SET08FU-EL -CP
IC105	51T25576W07	NJM4580V-TE2 -SE2
IC201	51T15731W10	TC7S66F-TE85L -CP
IC202	51T95043W01	BA3884F -SE9
IC203	51-00867Z01	BD3426K -QT
IC301	51T15420Y01	BA4560F-E2 -SE2
IC302	51T15420Y01	BA4560F-E2 -SE2
IC501(*)	51-02273Z01	MTP,D70F3261YGC -QT
IC502	51T75063Y02	BD5224G-TR -CP
IC503	51T15362Y01	TC74HCT7007AFTP2-SE6
IC504	51T45703Y01	TA48M033F-TE16L -NE5
IC507	51T93332F01	IC,NJM2903M-TE3 -SE2
IC605	51T93532F05	TC4S01F-TE85L -CP
IC606	51T15731W10	TC7S66F-TE85L -CP
IC607	51T15731W10	TC7S66F-TE85L -CP
IC701	51-01521Z01	PQ015YZ01ZPH -NE5
IC702	51T65641Y01	PQ070XZ02Z-L -NE5
IC703	51T65190Y01	NJM2268V-TE1 -SE2
IC704	51T65583Y01	PQ1CG3032FZ -NS
IC705	51T65641Y01	PQ070XZ02Z-L -NE5
IC706	51T25259Y02	BA00AST-V5 -ZS
IC707	51T25259Y02	BA00AST-V5 -ZS
IC801	51T65147Y01	HA13165 -ZS
IC802	51T45409Y01	TA8263BH -ZS
L001	24T25164Y21	IND,FSLM2520 4R7J-CP
L002	24T16403W29	COI,IND.15R-M -CP
L102	24T95456W27	FBI,BLM18PG181SH1-CP
L103	24T95456W27	FBI,BLM18PG181SH1-CP
L104	24T35072W01	FBI,BL01RN1A1E1A -A1
L702	24T25164Y27	IND,FSLM2520 15RJ-CP
L703	24T25164Y25	IND,FSLM2520 10RJ-CP
L704	24T35246Y12	IND,LEM2520 6R8J -CP
L705	24T25565Y09	IND,SLF12565 68RM-EA
Q001	48T52437F01	TR ,2SB709A-QR/TX-CP
Q002	48T62967F03	TR,DTC124EKA-T146-CP
Q201	48T62967F02	TR,DTC114EKA-T146-CP
Q202	48T75205Y02	TR,FMC3A-T148 -CP
Q203	48T62967F03	TR,DTC124EKA-T146-CP
Q301	48T25317Y01	TR,XN0F256-TX -CP
Q302	48T25317Y01	TR,XN0F256-TX -CP
Q303	48T25317Y01	TR,XN0F256-TX -CP
Q501	48T75205Y01	TR,FMC2A-T148 -CP
Q502	48T75205Y02	TR,FMC3A-T148 -CP
Q503	48T63420F01	TR,2SA1037AK-146 -CP
Q504	48T62967F02	TR,DTC114EKA-T146-CP
Q505	48T52437F01	TR ,2SB709A-QR/TX-CP
Q506	48T52438F01	TR ,2SD601A-RS/TX-CP
Q507	48T75205Y01	TR,FMC2A-T148 -CP
Q508	48T62966F01	TR,DTA143EKA-T146-CP
Q602	48T52437F05	TR ,2SB709A-S /TX-CP
Q603	48T62967F02	TR,DTC114EKA-T146-CP
Q604	48T62967F03	TR,DTC124EKA-T146-CP
Q702	48T62967F33	TR,DTC343TK-T146 -CP

Q703	48T75181Y01	TR,IMH11A-T110 -CP
Q704	48T62967F33	TR,DTC343TK-T146 -CP
Q705	48T75205Y01	TR,FMC2A-T148 -CP
Q801	48T75205Y02	TR,FMC3A-T148 -CP
Q802	48T62967F01	TR,DTC143EKA-T146-CP
Q803	48T75205Y02	TR,FMC3A-T148 -CP
Q804	48T75205Y01	TR,FMC2A-T148 -CP
Q805	48T75205Y02	TR,FMC3A-T148 -CP
Q807	48T84366F04	TR,2SB1243-QR-TV2-RD
Q808	48T62967F01	TR,DTC143EKA-T146-CP
Q809	48T62967F03	TR,DTC124EKA-T146-CP
Q810	48T62966F01	TR,DTA143EKA-T146-CP
Q811	48T62967F02	TR,DTC114EKA-T146-CP
Q812	48T75205Y01	TR,FMC2A-T148 -CP
Q813	48T62967F03	TR,DTC124EKA-T146-CP
Q814	48T84366F04	TR,2SB1243-QR-TV2-RD
Q815	48T62967F01	TR,DTC143EKA-T146-CP
Q816	48T62967F03	TR,DTC124EKA-T146-CP
Q817	48T75205Y02	TR,FMC3A-T148 -CP
Q818	48T73023F01	TR ,2SD874A -E2
Q819	48T62966F01	TR,DTA143EKA-T146-CP
R001	06S55361Y17	RES,RK 10RJ 1/4 -CP
R002	06S55366Y39	RES,RK JUMPER1/10-CP
R003	06S55366Y39	RES,RK JUMPER1/10-CP
R005	06S55361Y01	RES,RK 2R2J 1/4 -CP
R007	06S55361Y01	RES,RK 2R2J 1/4 -CP
R019	06S55361Y71	RES,RK 182J 1/4 -CP
R020	06S55361Y71	RES,RK 182J 1/4 -CP
R021	06S55361Y97	RES,RK 223J 1/4 -CP
R101	06S15593Y21	RES,RK 68RF 1/10 -CP
R102	06S55365Y97	RES,RK 223J 1/10 -CP
R109	06S55366Y06	RES,RK 473J 1/10 -CP
R111	06S15593Y67	RES,RK 562F 1/10 -CP
R112	06S15593Y67	RES,RK 562F 1/10 -CP
R113	06S15593Y81	RES,RK 223F 1/10 -CP
R114	06S15593Y81	RES,RK 223F 1/10 -CP
R115	06S15593Y57	RES,RK 222F 1/10 -CP
R116	06S15593Y57	RES,RK 222F 1/10 -CP
R117	06S15593Y73	RES,RK 103F 1/10 -CP
R118	06S15593Y73	RES,RK 103F 1/10 -CP
R119	06S15593Y83	RES,RK 273F 1/10 -CP
R120	06S15593Y83	RES,RK 273F 1/10 -CP
R121	06S55365Y65	RES,RK 102J 1/10 -CP
R122	06S55365Y65	RES,RK 102J 1/10 -CP
R125	06S15593Y17	RES,RK 47RF 1/10 -CP
R126	06S15593Y17	RES,RK 47RF 1/10 -CP
R127	06S15593Y73	RES,RK 103F 1/10 -CP
R128	06S15593Y73	RES,RK 103F 1/10 -CP
R129	06S15593Y50	RES,RK 112F 1/10 -CP
R130	06S55365Y65	RES,RK 102J 1/10 -CP
R131	06S55365Y25	RES,RK 22RJ 1/10 -CP
R132	06S55365Y25	RES,RK 22RJ 1/10 -CP
R133	06S55365Y25	RES,RK 22RJ 1/10 -CP
R201	06S55365Y97	RES,RK 223J 1/10 -CP
R202	06S55365Y65	RES,RK 102J 1/10 -CP
R203	06S70072F77	RES,CP .103-J-1/4-CP
R204	06S55366Y02	RES,RK 333J 1/10 -CP

	R205	06S55365Y78	RES,RK 362J 1/10 -CP
	R208	06S55365Y80	RES,RK 432J 1/10 -CP
	R301	06S55365Y66	RES,RK 112J 1/10 -CP
	R302	06S55365Y66	RES,RK 112J 1/10 -CP
	R303	06S55365Y66	RES,RK 112J 1/10 -CP
	R304	06S55365Y66	RES,RK 112J 1/10 -CP
	R305	06S55363Y47	RES,RK 181J 1/8 -CP
	R306	06S55363Y41	RES,RK 101J 1/8 -CP
	R307	06S55366Y08	RES,RK 563J 1/10 -CP
	R308	06S55366Y08	RES,RK 563J 1/10 -CP
	R309	06S55366Y08	RES,RK 563J 1/10 -CP
	R310	06S55366Y08	RES,RK 563J 1/10 -CP
	R311	06S55363Y47	RES,RK 181J 1/8 -CP
	R312	06S55363Y47	RES,RK 181J 1/8 -CP
	R313	06S55363Y47	RES,RK 181J 1/8 -CP
	R314	06S55363Y41	RES,RK 101J 1/8 -CP
	R315	06S55363Y41	RES,RK 101J 1/8 -CP
	R316	06S55363Y41	RES,RK 101J 1/8 -CP
	R319	06S55366Y08	RES,RK 563J 1/10 -CP
	R320	06S55366Y08	RES,RK 563J 1/10 -CP
	R321	06S55363Y47	RES,RK 181J 1/8 -CP
	R322	06S55363Y47	RES,RK 181J 1/8 -CP
	R324	06S55363Y41	RES,RK 101J 1/8 -CP
	R325	06S55363Y41	RES,RK 101J 1/8 -CP
	R501	06S55365Y93	RES,RK 153J 1/10 -CP
	R502	06S15593Y74	RES,RK 113F 1/10 -CP
	R503	06S55365Y41	RES,RK 101J 1/10 -CP
	R504	06S55365Y97	RES,RK 223J 1/10 -CP
	R505	06S55365Y97	RES,RK 223J 1/10 -CP
	R506	06S55365Y97	RES,RK 223J 1/10 -CP
	R507	06S55365Y97	RES,RK 223J 1/10 -CP
#1	R508	06S55365Y97	RES,RK 223J 1/10 -CP
%1	R508	06S55365Y97	RES,RK 223J 1/10 -CP
#1	R509	06S55365Y97	RES,RK 223J 1/10 -CP
$1	R509	06S55365Y97	RES,RK 223J 1/10 -CP
%1	R510	06S55365Y97	RES,RK 223J 1/10 -CP
&1	R510	06S55365Y97	RES,RK 223J 1/10 -CP
$1	R511	06S55365Y97	RES,RK 223J 1/10 -CP
&1	R511	06S55365Y97	RES,RK 223J 1/10 -CP
	R512	06S15593Y74	RES,RK 113F 1/10 -CP
	R513	06S55365Y89	RES,RK 103J 1/10 -CP
	R514	06S55365Y89	RES,RK 103J 1/10 -CP
	R515	06S55365Y41	RES,RK 101J 1/10 -CP
	R516	06S55365Y93	RES,RK 153J 1/10 -CP
	R517	06S55365Y41	RES,RK 101J 1/10 -CP
	R518	06S55365Y41	RES,RK 101J 1/10 -CP
	R519	06S55366Y01	RES,RK 303J 1/10 -CP
	R520	06S55365Y41	RES,RK 101J 1/10 -CP
	R521	06S55366Y01	RES,RK 303J 1/10 -CP
	R522	06S15593Y81	RES,RK 223F 1/10 -CP
	R523	06S15593Y81	RES,RK 223F 1/10 -CP
	R524	06S15593Y77	RES,RK 153F 1/10 -CP
	R527	06S55366Y39	RES,RK JUMPER1/10-CP
#1	R528	06S55365Y97	RES,RK 223J 1/10 -CP
%1	R528	06S55365Y97	RES,RK 223J 1/10 -CP
&1	R528	06S55365Y97	RES,RK 223J 1/10 -CP
	R531	06S55365Y81	RES,RK 472J 1/10 -CP

	R532	06S55365Y65	RES,RK 102J 1/10 -CP
	R533	06S55365Y89	RES,RK 103J 1/10 -CP
	R534	06S55366Y06	RES,RK 473J 1/10 -CP
	R535	06S55365Y81	RES,RK 472J 1/10 -CP
	R536	06S55365Y65	RES,RK 102J 1/10 -CP
	R537	06S55365Y65	RES,RK 102J 1/10 -CP
	R538	06S55366Y30	RES,RK 474J 1/10 -CP
	R539	06S55361Y75	RES,RK 272J 1/4 -CP
	R540	06S15593Y81	RES,RK 223F 1/10 -CP
	R541	06S55365Y97	RES,RK 223J 1/10 -CP
	R542	06S55365Y89	RES,RK 103J 1/10 -CP
	R543	06S55363Y89	RES,RK 103J 1/8 -CP
	R544	06S55363Y65	RES,RK 102J 1/8 -CP
	R545	06S55363Y65	RES,RK 102J 1/8 -CP
	R546	06S15593Y63	RES,RK 392F 1/10 -CP
	R547	06S55365Y89	RES,RK 103J 1/10 -CP
	R549	06S55365Y41	RES,RK 101J 1/10 -CP
	R550	06S55365Y97	RES,RK 223J 1/10 -CP
	R551	06S55363Y65	RES,RK 102J 1/8 -CP
	R552	06S55363Y65	RES,RK 102J 1/8 -CP
	R553	06S55363Y65	RES,RK 102J 1/8 -CP
	R554	06S55363Y65	RES,RK 102J 1/8 -CP
	R555	06S55363Y65	RES,RK 102J 1/8 -CP
	R556	06S55363Y65	RES,RK 102J 1/8 -CP
	R557	06S55363Y65	RES,RK 102J 1/8 -CP
	R558	06S55365Y93	RES,RK 153J 1/10 -CP
	R559	06S35083Y45	RES,RK 473F 1/4 -CP
	R560	06S55366Y01	RES,RK 303J 1/10 -CP
	R561	06S55363Y73	RES,RK 222J 1/8 -CP
	R562	06S55365Y99	RES,RK 273J 1/10 -CP
	R563	06T45541Y01	RES,RS 12RJ 2W +
$1	R564	06S55365Y97	RES,RK 223J 1/10 -CP
	R565	06S55365Y85	RES,RK 682J 1/10 -CP
	R566	06S55365Y89	RES,RK 103J 1/10 -CP
	R567	06S55365Y85	RES,RK 682J 1/10 -CP
	R568	06S55365Y81	RES,RK 472J 1/10 -CP
	R569	06S55365Y85	RES,RK 682J 1/10 -CP
	R570	06S55365Y67	RES,RK 122J 1/10 -CP
	R571	06S55365Y89	RES,RK 103J 1/10 -CP
	R572	06S55361Y31	RES,RK 39RJ 1/4 -CP
	R573	06S55361Y31	RES,RK 39RJ 1/4 -CP
	R574	06S55361Y31	RES,RK 39RJ 1/4 -CP
	R575	06S55361Y31	RES,RK 39RJ 1/4 -CP
	R576	06S55361Y17	RES,RK 10RJ 1/4 -CP
	R577	06S55365Y73	RES,RK 222J 1/10 -CP
	R578	06S55365Y69	RES,RK 152J 1/10 -CP
	R579	06S55365Y89	RES,RK 103J 1/10 -CP
	R584	06S55365Y69	RES,RK 152J 1/10 -CP
	R585	06S55365Y73	RES,RK 222J 1/10 -CP
	R587	06S55366Y39	RES,RK JUMPER1/10-CP
	R588	06S55366Y39	RES,RK JUMPER1/10-CP
	R589	06S55366Y06	RES,RK 473J 1/10 -CP
	R591	06S55366Y06	RES,RK 473J 1/10 -CP
	R592	06S55365Y41	RES,RK 101J 1/10 -CP
	R593	06S55365Y41	RES,RK 101J 1/10 -CP
	R594	06S55365Y65	RES,RK 102J 1/10 -CP
	R595	06S55365Y65	RES,RK 102J 1/10 -CP

	R596	06S55365Y65	RES,RK 102J 1/10 -CP
	R597	06S55365Y65	RES,RK 102J 1/10 -CP
	R600	06S55366Y39	RES,RK JUMPER1/10-CP
	R601	06S55365Y65	RES,RK 102J 1/10 -CP
	R602	06S55365Y65	RES,RK 102J 1/10 -CP
	R603	06S55365Y65	RES,RK 102J 1/10 -CP
	R604	06S55365Y65	RES,RK 102J 1/10 -CP
	R620	06S55366Y30	RES,RK 474J 1/10 -CP
	R621	06S55365Y97	RES,RK 223J 1/10 -CP
	R622	06S55366Y39	RES,RK JUMPER1/10-CP
	R623	06S55361Y41	RES,RK 101J 1/4 -CP
	R624	06S55365Y73	RES,RK 222J 1/10 -CP
	R625	06S55365Y97	RES,RK 223J 1/10 -CP
	R626	06S55365Y77	RES,RK 332J 1/10 -CP
	R628	06S55365Y97	RES,RK 223J 1/10 -CP
	R629	06S55365Y65	RES,RK 102J 1/10 -CP
	R701	06S55366Y14	RES,RK 104J 1/10 -CP
	R706	06S55366Y14	RES,RK 104J 1/10 -CP
	R710	06S15593Y35	RES,RK 271F 1/10 -CP
	R711	06S15593Y52	RES,RK 132F 1/10 -CP
	R712	06S55361Y89	RES,RK 103J 1/4 -CP
	R713	06S55361Y65	RES,RK 102J 1/4 -CP
	R714	06S15593Y62	RES,RK 362F 1/10 -CP
	R715	06S15593Y55	RES,RK 182F 1/10 -CP
	R716	06S15593Y21	RES,RK 68RF 1/10 -CP
	R717	06S55363Y58	RES,RK 511J 1/8 -CP
	R718	06S55365Y57	RES,RK 471J 1/10 -CP
	R719	06S35084Y61	RES,RK 105F 1/8 -CP
	R720	06S35084Y61	RES,RK 105F 1/8 -CP
	R721	06S55361Y65	RES,RK 102J 1/4 -CP
	R722	06S55362Y06	RES,RK 473J 1/4 -CP
	R724	06S15593Y25	RES,RK 101F 1/10 -CP
	R725	06S15593Y69	RES,RK 682F 1/10 -CP
	R726	06S15593Y59	RES,RK 272F 1/10 -CP
	R728	06S55366Y14	RES,RK 104J 1/10 -CP
	R730	06S15593Y58	RES,RK 242F 1/10 -CP
	R731	06S15593Y58	RES,RK 242F 1/10 -CP
	R732	06S55361Y65	RES,RK 102J 1/4 -CP
	R734	06S15593Y75	RES,RK 123F 1/10 -CP
	R735	06S15593Y33	RES,RK 221F 1/10 -CP
	R736	06S15593Y64	RES,RK 432F 1/10 -CP
$1	R737	06S55362Y39	RES,RK JUMPER 1/4-CP
%1	R737	06S55362Y39	RES,RK JUMPER 1/4-CP
&1	R737	06S55362Y39	RES,RK JUMPER 1/4-CP
	R739	06S15593Y73	RES,RK 103F 1/10 -CP
	R740	06S15593Y61	RES,RK 332F 1/10 -CP
	R741	06S15593Y39	RES,RK 391F 1/10 -CP
	R742	06S15593Y55	RES,RK 182F 1/10 -CP
	R743	06S15593Y27	RES,RK 121F 1/10 -CP
	R744	06S55365Y27	RES,RK 27RJ 1/10 -CP
	R801	06S55365Y86	RES,RK 752J 1/10 -CP
	R802	06S55361Y89	RES,RK 103J 1/4 -CP
	R803	06S55365Y86	RES,RK 752J 1/10 -CP
	R804	06S55362Y01	RES,RK 303J 1/4 -CP
	R805	06S55366Y06	RES,RK 473J 1/10 -CP
	R806	06S55366Y06	RES,RK 473J 1/10 -CP
	R809	06S55365Y93	RES,RK 153J 1/10 -CP

R810	06S55366Y01	RES,RK 303J 1/10 -CP
R811	06S55361Y71	RES,RK 182J 1/4 -CP
R812	06S55365Y98	RES,RK 243J 1/10 -CP
R813	06S55361Y71	RES,RK 182J 1/4 -CP
R814	06S55362Y39	RES,RK JUMPER 1/4-CP
R815	06S35083Y31	RES,RK 332F 1/4 -CP
R816	06S35083Y35	RES,RK 682F 1/4 -CP
R819	06S15593Y83	RES,RK 273F 1/10 -CP
R820	06S35083Y45	RES,RK 473F 1/4 -CP
R822	06S55361Y89	RES,RK 103J 1/4 -CP
R823	06S55365Y93	RES,RK 153J 1/10 -CP
R824	06S55366Y01	RES,RK 303J 1/10 -CP
R825	06S55365Y81	RES,RK 472J 1/10 -CP
R826	06S55361Y41	RES,RK 101J 1/4 -CP
R827	06S55365Y89	RES,RK 103J 1/10 -CP
R828	06S55365Y53	RES,RK 331J 1/10 -CP
R829	06S45674W01	RES,RK 2R2J 1/10 -CP
R830	06S45674W01	RES,RK 2R2J 1/10 -CP
R831	06S70072F61	RES,CP .222-J-1/4-CP
R832	06S70072F61	RES,CP .222-J-1/4-CP
R833	06S55361Y89	RES,RK 103J 1/4 -CP
R834	06S55361Y89	RES,RK 103J 1/4 -CP
R835	06S55361Y54	RES,RK 361J 1/4 -CP
R836	06S55365Y01	RES,RK 2R2J 1/10 -CP
R837	06S55361Y51	RES,RK 271J 1/4 -CP
R838	06S55361Y51	RES,RK 271J 1/4 -CP
R839	06S55361Y71	RES,RK 182J 1/4 -CP
R840	06S55361Y71	RES,RK 182J 1/4 -CP
R841	06S55361Y89	RES,RK 103J 1/4 -CP
R842	06S55366Y06	RES,RK 473J 1/10 -CP
R843	06S55361Y81	RES,RK 472J 1/4 -CP
RA501	06S45591W07	RES,ARY MNR101J 4-CP
RA502	06S45591W07	RES,ARY MNR101J 4-CP
RA503	06S45591W07	RES,ARY MNR101J 4-CP
RA504	06S45591W07	RES,ARY MNR101J 4-CP
RA505	06S45591W07	RES,ARY MNR101J 4-CP
RA507	06S45591W07	RES,ARY MNR101J 4-CP
SA001	48T81048F02	PTT,DSP-201M -RD
SD701	48T45286Y01	DIO,SHT RB050L-40-E1
SW301	40T45282W02	SW,SLIDE SLD-42-508X
SW501	40T16096W03	SW ,TACT SKHHLW
TH501	48T25250Y01	TMT,ERTJ1VV104J -CP
VT001	24T35286Y02	IND,MG56 332J -DB
XL501	91T55360Y07	XTL,AT-51 5.000M -R5
Z101	91T65112W06	EMI,BK2125HM102 -CP
Z501	91T65112W06	EMI,BK2125HM102 -CP
Z701	91T45556Y03	EMI,NFM21HC101U1H-CP
Z801	91T45556Y03	EMI,NFM21HC101U1H-CP
ZD801	48T25766W09	DIO,ZEN.HZS 6C3L -R5
ZD802	48T25766W27	DIO,ZEN.HZS11A1L -R5
ZD803	48T62934F19	DIO,ZEN.RD5.1MB2 -CP

=======FRONT P.W.Board

C401	08S45677W60	CAP,CER 102J-CH1H-CP
C402	08S45676W89	CAP,CER 473K-B1E -CP
C404	08T81833F08	CAP,CER 475K-B1A -CP
C405	08S45676W80	CAP,CER 223K-B1E -CP

C406	08S45676W80	CAP,CER 223K-B1E -CP
C407	08S35374W11	CAP,CER 475K-B0J -CP
C408	08S45676W89	CAP,CER 473K-B1E -CP
D401	48T85357W01	DIO,1PS226 -CP
D402	48T81063F01	DIO,CP.MA159 / TX-CP
D403	48T94471F04	DIO,IMN10-T108 -CP
D406	48T85357W01	DIO,1PS226 -CP
D407	48T85357W01	DIO,1PS226 -CP
D408	48T85357W01	DIO,1PS226 -CP
D409	48T85357W01	DIO,1PS226 -CP
D410	48T85357W01	DIO,1PS226 -CP
IC401	51-04007Z01	PT6530LQ(L) -QT
IC402	51T55628Y01	RS-671 -NE2
LD401	48-00415Z01	LED,WHT NSCW505CT-E2
LD402	48-00415Z01	LED,WHT NSCW505CT-E2
LD403	48T15521Y02	LED,RED SML-310LT-CP
LD404	48T15521Y07	LED,GRN 310PT-KL -CP
LD405	48T75013Y01	LED,WHT UW1141C -CP
LD406	48T15521Y07	LED,GRN 310PT-KL -CP
LD407	48T15521Y07	LED,GRN 310PT-KL -CP
LD408	48T15521Y07	LED,GRN 310PT-KL -CP
LD409	48T15521Y07	LED,GRN 310PT-KL -CP
LD410	48T15521Y07	LED,GRN 310PT-KL -CP
LD411	48T15521Y07	LED,GRN 310PT-KL -CP
LD412	48T15521Y07	LED,GRN 310PT-KL -CP
LD413	48T15521Y07	LED,GRN 310PT-KL -CP
LD414	48T15521Y07	LED,GRN 310PT-KL -CP
LD415	48T15521Y07	LED,GRN 310PT-KL -CP
LD416	48T15521Y07	LED,GRN 310PT-KL -CP
LD417	48T15521Y07	LED,GRN 310PT-KL -CP
LD418	48T15521Y07	LED,GRN 310PT-KL -CP
LD419	48T15521Y07	LED,GRN 310PT-KL -CP
LD420	48T15521Y07	LED,GRN 310PT-KL -CP
LD421	48T15521Y07	LED,GRN 310PT-KL -CP
LD422	48T15521Y07	LED,GRN 310PT-KL -CP
LD424	48T15521Y07	LED,GRN 310PT-KL -CP
LD425	48T15521Y07	LED,GRN 310PT-KL -CP
LD436	48T35306Y06	LED,BLU UB1104B -CP
Q407	48T52438F04	TR ,2SD601A-S /TX-CP
Q411	48T64222F10	TR ,UN2210 47 -TX
Q414	48T75205Y02	TR,FMC3A-T148 -CP
Q416	48T52438F04	TR ,2SD601A-S /TX-CP
Q417	48T52438F04	TR ,2SD601A-S /TX-CP
R401	06S45674W93	RES,RK 333J 1/10 -CP
R403	06S70072F29	RES,CP .101-J-1/4-CP
R404	06S70072F29	RES,CP .101-J-1/4-CP
R406	06S70072F69	RES,CP .472-J-1/4-CP
R407	06S45674W73	RES,RK 472J 1/10 -CP
R408	06S70072F49	RES,CP .681-J-1/4-CP
R409	06S64996F39	RES,RK JUMPER 1/8-CP
R427	06S70072F33	RES,CP .151-J-1/4-CP
R432	06S45674W57	RES,RK 102J 1/10 -CP
R433	06S64995F29	RES,RK 101J 1/8 -CP
R434	06S45674W57	RES,RK 102J 1/10 -CP
R435	06S45674W57	RES,RK 102J 1/10 -CP
R436	06S70072F57	RES,CP .152-J-1/4-CP
R437	06S55363Y98	RES,RK 243J 1/8 -CP

R438	06S64995F53	RES,RK 102J 1/8 -CP
R439	06S64995F53	RES,RK 102J 1/8 -CP
R440	06S64995F53	RES,RK 102J 1/8 -CP
R441	06S64995F53	RES,RK 102J 1/8 -CP
R442	06S64995F53	RES,RK 102J 1/8 -CP
R443	06S64995F53	RES,RK 102J 1/8 -CP
R444	06S55363Y98	RES,RK 243J 1/8 -CP
R446	06S70072F41	RES,CP .331-J-1/4-CP
R447	06S45674W73	RES,RK 472J 1/10 -CP
R448	06S45674W73	RES,RK 472J 1/10 -CP
R462	06S70072F41	RES,CP .331-J-1/4-CP
R463	06S70072F41	RES,CP .331-J-1/4-CP
R464	06S55361Y57	RES,RK 471J 1/4 -CP
R465	06S55361Y57	RES,RK 471J 1/4 -CP
R466	06S55361Y57	RES,RK 471J 1/4 -CP
R467	06S70072F47	RES,CP .561-J-1/4-CP
R476	06S35095Y08	RES,RK JUMPER 1/4-CP
R477	06S35095Y08	RES,RK JUMPER 1/4-CP
R479	06S35095Y08	RES,RK JUMPER 1/4-CP
R488	06S45675W06	RES,RK 104J 1/10 -CP
RA401	06S45591W06	RES,ARY MNR102J 4-CP
RA402	06S45591W06	RES,ARY MNR102J 4-CP
SW401	40T65353Y01	SW,TACT SKRPACE010E2
SW402	40T65353Y01	SW,TACT SKRPACE010E2
SW403	40T65353Y01	SW,TACT SKRPACE010E2
SW404	40T65353Y01	SW,TACT SKRPACE010E2
SW405	40T65353Y01	SW,TACT SKRPACE010E2
SW406	40T65353Y01	SW,TACT SKRPACE010E2
SW407	40T65353Y01	SW,TACT SKRPACE010E2
SW408	40T65353Y01	SW,TACT SKRPACE010E2
SW409	40T65353Y01	SW,TACT SKRPACE010E2
SW410	40T65353Y01	SW,TACT SKRPACE010E2
SW411	40T65353Y01	SW,TACT SKRPACE010E2
SW412	40T65353Y01	SW,TACT SKRPACE010E2
SW413	40T65353Y01	SW,TACT SKRPACE010E2
SW414	40T65353Y01	SW,TACT SKRPACE010E2
SW415	40T65353Y01	SW,TACT SKRPACE010E2
SW416	40T65353Y01	SW,TACT SKRPACE010E2
SW417	40T65353Y01	SW,TACT SKRPACE010E2
SW418	40T65353Y01	SW,TACT SKRPACE010E2
SW419	40T65353Y01	SW,TACT SKRPACE010E2

=======DV-MAIN P.W.Board

C501	08T81833F13	CAP,CER 106K-B1C -CP
C502	08T81833F13	CAP,CER 106K-B1C -CP
C503	08T81833F13	CAP,CER 106K-B1C -CP
C504	08S45232Y05	CAP,CER 102K-B1H -CP
C505	08T81833F13	CAP,CER 106K-B1C -CP
C506	08T81833F13	CAP,CER 106K-B1C -CP
C507	08T81833F13	CAP,CER 106K-B1C -CP
C508	08S45232Y05	CAP,CER 102K-B1H -CP
C509	08S45232Y05	CAP,CER 102K-B1H -CP
C510	08S45232Y05	CAP,CER 102K-B1H -CP
C511	08S45232Y11	CAP,CER 103K-B1C -CP
C512	08S45232Y05	CAP,CER 102K-B1H -CP
C513	08S45232Y05	CAP,CER 102K-B1H -CP
C514	08S45232Y11	CAP,CER 103K-B1C -CP

C516	08S65667Y05	CAP,CER 105KX5R1A-CP
C601	08S45232Y05	CAP,CER 102K-B1H -CP
C602	08S45232Y05	CAP,CER 102K-B1H -CP
C603	08S45232Y05	CAP,CER 102K-B1H -CP
C604	08S45232Y05	CAP,CER 102K-B1H -CP
C605	08S45232Y05	CAP,CER 102K-B1H -CP
C606	08S45232Y05	CAP,CER 102K-B1H -CP
C607	08S45232Y05	CAP,CER 102K-B1H -CP
C608	08S45232Y05	CAP,CER 102K-B1H -CP
C609	08S45232Y05	CAP,CER 102K-B1H -CP
C610	08S45232Y05	CAP,CER 102K-B1H -CP
C611	08S45232Y05	CAP,CER 102K-B1H -CP
C612	08S45232Y05	CAP,CER 102K-B1H -CP
C613	08S45232Y05	CAP,CER 102K-B1H -CP
C614	08S45676W87	CAP,CER 333K-B1E -CP
C615	08S45232Y17	CAP,CER 104K-B0J -CP
C616	08S45232Y17	CAP,CER 104K-B0J -CP
C617	08S45232Y17	CAP,CER 104K-B0J -CP
C618	08S45676W70	CAP,CER 562K-B1H -CP
C619	08S45676W79	CAP,CER 183K-B1E -CP
C620	08S45232Y17	CAP,CER 104K-B0J -CP
C621	08S45232Y17	CAP,CER 104K-B0J -CP
C622	08S45232Y17	CAP,CER 104K-B0J -CP
C623	08S45232Y17	CAP,CER 104K-B0J -CP
C624	08S45232Y05	CAP,CER 102K-B1H -CP
C625	08S45232Y17	CAP,CER 104K-B0J -CP
C626	08S45232Y17	CAP,CER 104K-B0J -CP
C627	08S45232Y17	CAP,CER 104K-B0J -CP
C631	08S35374W12	CAP,CER 106K-B0J -CP
C632	08S45232Y05	CAP,CER 102K-B1H -CP
C633	08S45232Y05	CAP,CER 102K-B1H -CP
C634	08S45232Y05	CAP,CER 102K-B1H -CP
C635	08S45232Y05	CAP,CER 102K-B1H -CP
C636	08S45232Y05	CAP,CER 102K-B1H -CP
C637	08S45232Y05	CAP,CER 102K-B1H -CP
C638	08S45232Y05	CAP,CER 102K-B1H -CP
C639	08S45232Y05	CAP,CER 102K-B1H -CP
C640	08S45232Y05	CAP,CER 102K-B1H -CP
C641	08S45232Y05	CAP,CER 102K-B1H -CP
C642	08S45232Y05	CAP,CER 102K-B1H -CP
C643	08S45232Y05	CAP,CER 102K-B1H -CP
C644	08S45232Y05	CAP,CER 102K-B1H -CP
C645	08S45232Y05	CAP,CER 102K-B1H -CP
C646	08S45232Y05	CAP,CER 102K-B1H -CP
C647	08S45232Y05	CAP,CER 102K-B1H -CP
C648	08S45232Y05	CAP,CER 102K-B1H -CP
C651	08S65670Y01	CAP,CER 106KX5R1C-CP
C652	08S65670Y01	CAP,CER 106KX5R1C-CP
C653	08S45232Y05	CAP,CER 102K-B1H -CP
C654	08S45232Y05	CAP,CER 102K-B1H -CP
C655	08S45232Y17	CAP,CER 104K-B0J -CP
C658	08S35374W12	CAP,CER 106K-B0J -CP
C671	08S45232Y11	CAP,CER 103K-B1C -CP
C672	08S45232Y17	CAP,CER 104K-B0J -CP
C673	08S45232Y17	CAP,CER 104K-B0J -CP
C674	08S45232Y17	CAP,CER 104K-B0J -CP
C675	08S45232Y17	CAP,CER 104K-B0J -CP

C676	08S45232Y17	CAP,CER 104K-B0J -CP
C677	08S45232Y17	CAP,CER 104K-B0J -CP
C678	08S45232Y17	CAP,CER 104K-B0J -CP
C679	08S45232Y17	CAP,CER 104K-B0J -CP
C680	08S35349Y16	CAP,CER 105K-B1A -CP
C681	08S35349Y16	CAP,CER 105K-B1A -CP
C682	08S45232Y17	CAP,CER 104K-B0J -CP
C683	08S45232Y17	CAP,CER 104K-B0J -CP
C684	08S45232Y17	CAP,CER 104K-B0J -CP
C685	08S45232Y17	CAP,CER 104K-B0J -CP
C688	08S45232Y07	CAP,CER 222K-B1H -CP
C689	08S45232Y07	CAP,CER 222K-B1H -CP
C690	08S45232Y11	CAP,CER 103K-B1C -CP
C691	08S45231Y23	CAP,CER 68RJ-CH1H-CP
C701	08S65670Y01	CAP,CER 106KX5R1C-CP
C702	08S65670Y01	CAP,CER 106KX5R1C-CP
C711	08S45232Y05	CAP,CER 102K-B1H -CP
C712	08S45232Y05	CAP,CER 102K-B1H -CP
C713	08S45232Y05	CAP,CER 102K-B1H -CP
C721	08S45232Y05	CAP,CER 102K-B1H -CP
C725	08S45232Y05	CAP,CER 102K-B1H -CP
C731	08S45232Y17	CAP,CER 104K-B0J -CP
C732	08S45232Y05	CAP,CER 102K-B1H -CP
C733	08S45232Y05	CAP,CER 102K-B1H -CP
C734	08S45232Y17	CAP,CER 104K-B0J -CP
C735	08S45232Y17	CAP,CER 104K-B0J -CP
C736	08S45232Y05	CAP,CER 102K-B1H -CP
C737	08S45232Y05	CAP,CER 102K-B1H -CP
C738	08S45232Y17	CAP,CER 104K-B0J -CP
C739	08S45232Y05	CAP,CER 102K-B1H -CP
C740	08S45232Y05	CAP,CER 102K-B1H -CP
C741	08S45232Y05	CAP,CER 102K-B1H -CP
C742	08S45232Y05	CAP,CER 102K-B1H -CP
C801	08T65555Y01	CAP,CER 226K-BJ0J-CP
C802	08T65555Y01	CAP,CER 226K-BJ0J-CP
C803	08S35349Y12	CAP,CER 105K-B0J -CP
C804	08S45676W80	CAP,CER 223K-B1E -CP
C811	08T65555Y01	CAP,CER 226K-BJ0J-CP
C812	08T65555Y01	CAP,CER 226K-BJ0J-CP
C813	08S35349Y12	CAP,CER 105K-B0J -CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C821	08S45232Y13	CAP,CER 223K-B1C -CP
C831	08S45232Y13	CAP,CER 223K-B1C -CP
C841	08S45232Y17	CAP,CER 104K-B0J -CP
C842	08T65555Y01	CAP,CER 226K-BJ0J-CP
C843	08S45232Y17	CAP,CER 104K-B0J -CP
C844	08T65555Y01	CAP,CER 226K-BJ0J-CP
C845	08S45232Y17	CAP,CER 104K-B0J -CP
C846	08S45232Y17	CAP,CER 104K-B0J -CP
C850	08S45232Y08	CAP,CER 332K-B1H -CP
C851	08S45232Y08	CAP,CER 332K-B1H -CP
C854	08S45232Y11	CAP,CER 103K-B1C -CP
C855	08S45232Y08	CAP,CER 332K-B1H -CP
C860	08T81833F13	CAP,CER 106K-B1C -CP
C861	08S45232Y17	CAP,CER 104K-B0J -CP
C862	08T81833F13	CAP,CER 106K-B1C -CP
C865	08S65668Y04	CAP,CER 104KX5R1A-CP

C866	08T81833F13	CAP,CER 106K-B1C -CP
C867	08T81833F13	CAP,CER 106K-B1C -CP
C868	08S35374W10	CAP,CER 225K-B1A -CP
C869	08S35374W10	CAP,CER 225K-B1A -CP
C870	08S65668Y04	CAP,CER 104KX5R1A-CP
C871	08S45232Y11	CAP,CER 103K-B1C -CP
C872	08S45232Y17	CAP,CER 104K-B0J -CP
C874	08S45232Y17	CAP,CER 104K-B0J -CP
C875	08S45232Y17	CAP,CER 104K-B0J -CP
C876	08S45232Y11	CAP,CER 103K-B1C -CP
C878	08S45232Y08	CAP,CER 332K-B1H -CP
C880	08T81833F13	CAP,CER 106K-B1C -CP
C881	08S45231Y25	CAP,CER 101J-CH1H-CP
C882	08S45677W40	CAP,CER.151J-CH1H-CP
C883	08S45677W40	CAP,CER.151J-CH1H-CP
C884	08S45231Y25	CAP,CER 101J-CH1H-CP
C885	08S45677W40	CAP,CER.151J-CH1H-CP
C886	08S45677W40	CAP,CER.151J-CH1H-CP
C901	08S65667Y05	CAP,CER 105KX5R1A-CP
C902	08S45232Y05	CAP,CER 102K-B1H -CP
C903	08S65667Y05	CAP,CER 105KX5R1A-CP
C904	08S45232Y17	CAP,CER 104K-B0J -CP
C908	08S45232Y05	CAP,CER 102K-B1H -CP
C909	08T81833F12	CAP,CER 106K-B1A -CP
C913	08S45232Y05	CAP,CER 102K-B1H -CP
C914	08S35349Y16	CAP,CER 105K-B1A -CP
C923	08S45232Y05	CAP,CER 102K-B1H -CP
C924	08S35349Y16	CAP,CER 105K-B1A -CP
C925	08S35374W12	CAP,CER 106K-B0J -CP
C926	08S65667Y05	CAP,CER 105KX5R1A-CP
CB501	09T45442Y45	FFC,54104-4592 -EQ
CB502	09T15107Y24	FFC,52435-2491 -ED
CB504	09T15107Y10	FFC,52745-1090 -E9
CB801	09T15107Y28	FFC,52435-2891 -ED
CB861	09T15107Y24	FFC,52435-2491 -ED
D601	48T25665Y01	DIO,1SS355-TE17 -CP
IC511	51T15185Y01	TC7SH08FU-TE85L -CP
IC512	51T35123Y01	TC7W14FK-TE85L -CP
IC601	51-00740Z02	MN35207UB -QT
IC711	51T75359Y01	TC74VHC573FT-EL -SE5
IC712	51T75359Y01	TC74VHC573FT-EL -SE5
IC713	51T15185Y01	TC7SH08FU-TE85L -CP
IC721	53-04487Z08	OFL,V1.0012DV37M050
IC725	51-00726Z01	MB85R256PFTN -ST
IC731	51-04096Z01	EDS6432AFTA-75TI -ST
IC861	51T55021Y02	BD7905BFS-E2 -SEE
L501	24T65689Y01	FBI,FBMJ2125HS420-CP
L502	24T65689Y01	FBI,FBMJ2125HS420-CP
L503	24T65689Y01	FBI,FBMJ2125HS420-CP
L601	24T95456W27	FBI,BLM18PG181SH1-CP
L604	24T95456W27	FBI,BLM18PG181SH1-CP
L605	24T95456W27	FBI,BLM18PG181SH1-CP
L841	24T25164Y25	IND,FSLM2520 10RJ-CP
L901	24T95456W27	FBI,BLM18PG181SH1-CP
L911	24T95456W12	FBI,BLM18AG102SH1-CP
L912	24T65331Y07	IND,LEMF2520 10RK-CP
L921	24T95456W12	FBI,BLM18AG102SH1-CP

L922	24T65331Y07	IND,LEMF2520 10RK-CP
Q801	48T75011W01	TR,2SD1782K-PQR-6-CP
Q802	48T55462Y01	TR,2SB1132-QR-100-E2
Q810	48T75366Y06	TR,FMC2-T148 -CP
Q811	48T75011W01	TR,2SD1782K-PQR-6-CP
Q812	48T55462Y01	TR,2SB1132-QR-100-E2
Q831	48T25137Y02	TR,UN9212J-TX -CP
Q832	48T25137Y06	TR,UN9216J-TX -CP
Q833	48T25137Y06	TR,UN9216J-TX -CP
Q911	48T63420F03	TR,2SA1037AK-R146-CP
Q921	48T63420F03	TR,2SA1037AK-R146-CP
R501	06S15615Y81	RES,RK 223J 1/16 -CP
R502	06S15615Y81	RES,RK 223J 1/16 -CP
R503	06S15615Y81	RES,RK 223J 1/16 -CP
R504	06S15615Y81	RES,RK 223J 1/16 -CP
R505	06S15615Y81	RES,RK 223J 1/16 -CP
R506	06S15615Y81	RES,RK 223J 1/16 -CP
R507	06S15615Y81	RES,RK 223J 1/16 -CP
R511	06S15615Y81	RES,RK 223J 1/16 -CP
R512	06S15615Y81	RES,RK 223J 1/16 -CP
R513	06S15615Y81	RES,RK 223J 1/16 -CP
R514	06S15615Y81	RES,RK 223J 1/16 -CP
R516	06S15615Y81	RES,RK 223J 1/16 -CP
R517	06S15615Y81	RES,RK 223J 1/16 -CP
R518	06S15615Y25	RES,RK 101J 1/16 -CP
R519	06S15615Y25	RES,RK 101J 1/16 -CP
R520	06S15615Y25	RES,RK 101J 1/16 -CP
R521	06S15615Y25	RES,RK 101J 1/16 -CP
R551	06S15615Y49	RES,RK 102J 1/16 -CP
R552	06S15615Y81	RES,RK 223J 1/16 -CP
R553	06S15615Y49	RES,RK 102J 1/16 -CP
R554	06S15615Y25	RES,RK 101J 1/16 -CP
R555	06S15615Y13	RES,RK 33RJ 1/16 -CP
R556	06S15615Y13	RES,RK 33RJ 1/16 -CP
R557	06S15615Y13	RES,RK 33RJ 1/16 -CP
R558	06S15615Y13	RES,RK 33RJ 1/16 -CP
R559	06S15615Y13	RES,RK 33RJ 1/16 -CP
R560	06S15615Y13	RES,RK 33RJ 1/16 -CP
R561	06S15615Y13	RES,RK 33RJ 1/16 -CP
R562	06S15615Y13	RES,RK 33RJ 1/16 -CP
R563	06S15615Y13	RES,RK 33RJ 1/16 -CP
R564	06S15615Y13	RES,RK 33RJ 1/16 -CP
R565	06S15615Y13	RES,RK 33RJ 1/16 -CP
R566	06S15615Y13	RES,RK 33RJ 1/16 -CP
R567	06S15615Y13	RES,RK 33RJ 1/16 -CP
R568	06S15615Y25	RES,RK 101J 1/16 -CP
R569	06S15615Y17	RES,RK 47RJ 1/16 -CP
R570	06S15615Y17	RES,RK 47RJ 1/16 -CP
R571	06S15615Y17	RES,RK 47RJ 1/16 -CP
R572	06S15615Y17	RES,RK 47RJ 1/16 -CP
R573	06S15615Y17	RES,RK 47RJ 1/16 -CP
R574	06S15615Y17	RES,RK 47RJ 1/16 -CP
R575	06S15615Y17	RES,RK 47RJ 1/16 -CP
R576	06S15615Y25	RES,RK 101J 1/16 -CP
R601	06S15615Y81	RES,RK 223J 1/16 -CP
R602	06S15615Y91	RES,RK 563J 1/16 -CP
R603	06S15615Y29	RES,RK 151J 1/16 -CP

R604	06S15615Y81	RES,RK 223J 1/16 -CP
R611	06S15615Y81	RES,RK 223J 1/16 -CP
R612	06S15616Y23	RES,RK JUMPER1/16-CP
R613	06S15615Y65	RES,RK 472J 1/16 -CP
R614	06S15615Y81	RES,RK 223J 1/16 -CP
R617	06S15593Y53	RES,RK 152F 1/10 -CP
R618	06S15593Y97	RES,RK 104F 1/10 -CP
R619	06S15593Y59	RES,RK 272F 1/10 -CP
R620	06S15594Y02	RES,RK 154F 1/10 -CP
R625	06S15615Y81	RES,RK 223J 1/16 -CP
R626	06S15616Y23	RES,RK JUMPER1/16-CP
R627	06S15615Y13	RES,RK 33RJ 1/16 -CP
R628	06S15615Y13	RES,RK 33RJ 1/16 -CP
R629	06S15615Y13	RES,RK 33RJ 1/16 -CP
R630	06S15615Y81	RES,RK 223J 1/16 -CP
R634	06S15615Y81	RES,RK 223J 1/16 -CP
R635	06S15615Y81	RES,RK 223J 1/16 -CP
R636	06S15615Y81	RES,RK 223J 1/16 -CP
R637	06S15615Y81	RES,RK 223J 1/16 -CP
R638	06S15615Y81	RES,RK 223J 1/16 -CP
R639	06S15615Y81	RES,RK 223J 1/16 -CP
R641	06S15615Y21	RES,RK 68RJ 1/16 -CP
R642	06S15615Y25	RES,RK 101J 1/16 -CP
R643	06S15615Y21	RES,RK 68RJ 1/16 -CP
R644	06S15615Y25	RES,RK 101J 1/16 -CP
R645	06S15615Y21	RES,RK 68RJ 1/16 -CP
R646	06S15615Y25	RES,RK 101J 1/16 -CP
R647	06S15615Y21	RES,RK 68RJ 1/16 -CP
R648	06S15615Y25	RES,RK 101J 1/16 -CP
R649	06S15615Y21	RES,RK 68RJ 1/16 -CP
R650	06S15615Y25	RES,RK 101J 1/16 -CP
R651	06S15615Y21	RES,RK 68RJ 1/16 -CP
R652	06S15615Y25	RES,RK 101J 1/16 -CP
R653	06S15615Y21	RES,RK 68RJ 1/16 -CP
R654	06S15615Y25	RES,RK 101J 1/16 -CP
R655	06S15615Y21	RES,RK 68RJ 1/16 -CP
R656	06S15615Y25	RES,RK 101J 1/16 -CP
R657	06S15615Y21	RES,RK 68RJ 1/16 -CP
R658	06S15615Y21	RES,RK 68RJ 1/16 -CP
R659	06S15615Y21	RES,RK 68RJ 1/16 -CP
R660	06S15615Y21	RES,RK 68RJ 1/16 -CP
R661	06S15615Y21	RES,RK 68RJ 1/16 -CP
R662	06S15615Y21	RES,RK 68RJ 1/16 -CP
R663	06S15615Y21	RES,RK 68RJ 1/16 -CP
R664	06S15615Y21	RES,RK 68RJ 1/16 -CP
R665	06S15615Y21	RES,RK 68RJ 1/16 -CP
R666	06S15615Y21	RES,RK 68RJ 1/16 -CP
R667	06S15615Y21	RES,RK 68RJ 1/16 -CP
R668	06S15615Y21	RES,RK 68RJ 1/16 -CP
R669	06S15615Y21	RES,RK 68RJ 1/16 -CP
R670	06S15615Y21	RES,RK 68RJ 1/16 -CP
R671	06S15615Y21	RES,RK 68RJ 1/16 -CP
R672	06S15615Y21	RES,RK 68RJ 1/16 -CP
R673	06S15615Y21	RES,RK 68RJ 1/16 -CP
R674	06S15615Y01	RES,RK 10RJ 1/16 -CP
R675	06S15615Y09	RES,RK 22RJ 1/16 -CP
R676	06S15615Y21	RES,RK 68RJ 1/16 -CP

R677	06S15615Y21	RES,RK 68RJ 1/16 -CP
R678	06S15615Y21	RES,RK 68RJ 1/16 -CP
R679	06S15615Y21	RES,RK 68RJ 1/16 -CP
R680	06S15615Y21	RES,RK 68RJ 1/16 -CP
R681	06S15615Y25	RES,RK 101J 1/16 -CP
R682	06S15615Y21	RES,RK 68RJ 1/16 -CP
R683	06S15615Y25	RES,RK 101J 1/16 -CP
R684	06S15615Y25	RES,RK 101J 1/16 -CP
R685	06S15615Y25	RES,RK 101J 1/16 -CP
R686	06S15615Y25	RES,RK 101J 1/16 -CP
R687	06S15615Y25	RES,RK 101J 1/16 -CP
R688	06S15615Y25	RES,RK 101J 1/16 -CP
R689	06S15615Y25	RES,RK 101J 1/16 -CP
R690	06S15615Y25	RES,RK 101J 1/16 -CP
R691	06S15615Y25	RES,RK 101J 1/16 -CP
R692	06S15615Y25	RES,RK 101J 1/16 -CP
R693	06S15615Y25	RES,RK 101J 1/16 -CP
R694	06S15615Y25	RES,RK 101J 1/16 -CP
R695	06S15615Y25	RES,RK 101J 1/16 -CP
R696	06S15615Y25	RES,RK 101J 1/16 -CP
R697	06S15615Y81	RES,RK 223J 1/16 -CP
R698	06S15615Y81	RES,RK 223J 1/16 -CP
R699	06S45675W43	RES,RK JUMPER1/10-CP
R701	06S15616Y23	RES,RK JUMPER1/16-CP
R702	06S15616Y23	RES,RK JUMPER1/16-CP
R703	06S15615Y17	RES,RK 47RJ 1/16 -CP
R704	06S15616Y23	RES,RK JUMPER1/16-CP
R705	06S15616Y23	RES,RK JUMPER1/16-CP
R706	06S15615Y81	RES,RK 223J 1/16 -CP
R707	06S15615Y81	RES,RK 223J 1/16 -CP
R708	06S15615Y81	RES,RK 223J 1/16 -CP
R711	06S15616Y23	RES,RK JUMPER1/16-CP
R712	06S15615Y81	RES,RK 223J 1/16 -CP
R721	06S15615Y81	RES,RK 223J 1/16 -CP
R732	06S15615Y81	RES,RK 223J 1/16 -CP
R751	06S15615Y17	RES,RK 47RJ 1/16 -CP
R752	06S15615Y17	RES,RK 47RJ 1/16 -CP
R753	06S15615Y17	RES,RK 47RJ 1/16 -CP
R754	06S15615Y17	RES,RK 47RJ 1/16 -CP
R755	06S15615Y17	RES,RK 47RJ 1/16 -CP
R756	06S15615Y17	RES,RK 47RJ 1/16 -CP
R757	06S15615Y17	RES,RK 47RJ 1/16 -CP
R758	06S15615Y17	RES,RK 47RJ 1/16 -CP
R759	06S15615Y17	RES,RK 47RJ 1/16 -CP
R760	06S15615Y17	RES,RK 47RJ 1/16 -CP
R761	06S15615Y17	RES,RK 47RJ 1/16 -CP
R762	06S15615Y17	RES,RK 47RJ 1/16 -CP
R763	06S15615Y17	RES,RK 47RJ 1/16 -CP
R764	06S15615Y17	RES,RK 47RJ 1/16 -CP
R765	06S15615Y17	RES,RK 47RJ 1/16 -CP
R767	06S15615Y17	RES,RK 47RJ 1/16 -CP
R771	06S15615Y81	RES,RK 223J 1/16 -CP
R772	06S15615Y81	RES,RK 223J 1/16 -CP
R773	06S15615Y81	RES,RK 223J 1/16 -CP
R774	06S15615Y81	RES,RK 223J 1/16 -CP
R775	06S15615Y81	RES,RK 223J 1/16 -CP
R776	06S15615Y81	RES,RK 223J 1/16 -CP

R777	06S15615Y81	RES,RK 223J 1/16 -CP
R778	06S15615Y81	RES,RK 223J 1/16 -CP
R779	06S15615Y81	RES,RK 223J 1/16 -CP
R780	06S15615Y81	RES,RK 223J 1/16 -CP
R781	06S15615Y81	RES,RK 223J 1/16 -CP
R782	06S15615Y81	RES,RK 223J 1/16 -CP
R783	06S15615Y81	RES,RK 223J 1/16 -CP
R784	06S15615Y81	RES,RK 223J 1/16 -CP
R785	06S15615Y81	RES,RK 223J 1/16 -CP
R786	06S15615Y81	RES,RK 223J 1/16 -CP
R801	06S15615Y41	RES,RK 471J 1/16 -CP
R802	06S15615Y41	RES,RK 471J 1/16 -CP
R803	06S15615Y09	RES,RK 22RJ 1/16 -CP
R804	06S45675W43	RES,RK JUMPER1/10-CP
R805	06S65522Y17	RES,RK 2R2F 1/4 -CP
R806	06S45675W06	RES,RK 104J 1/10 -CP
R811	06S15615Y41	RES,RK 471J 1/16 -CP
R812	06S15615Y41	RES,RK 471J 1/16 -CP
R813	06S15615Y09	RES,RK 22RJ 1/16 -CP
R814	06S45675W43	RES,RK JUMPER1/10-CP
R815	06S65522Y17	RES,RK 2R2F 1/4 -CP
R816	06S45675W06	RES,RK 104J 1/10 -CP
R821	06S35083Y01	RES,RK 10RF 1/4 -CP
R822	06S35083Y01	RES,RK 10RF 1/4 -CP
R825	06S15616Y23	RES,RK JUMPER1/16-CP
R826	06S15616Y23	RES,RK JUMPER1/16-CP
R827	06S15616Y23	RES,RK JUMPER1/16-CP
R830	06S15615Y25	RES,RK 101J 1/16 -CP
R831	06S15615Y49	RES,RK 102J 1/16 -CP
R832	06S15615Y23	RES,RK 82RJ 1/16 -CP
R833	06S15615Y23	RES,RK 82RJ 1/16 -CP
R835	06S15615Y25	RES,RK 101J 1/16 -CP
R844	06S15616Y23	RES,RK JUMPER1/16-CP
R849	06S15616Y23	RES,RK JUMPER1/16-CP
R850	06S15616Y23	RES,RK JUMPER1/16-CP
R851	06S15616Y23	RES,RK JUMPER1/16-CP
R852	06S15616Y23	RES,RK JUMPER1/16-CP
R853	06S15616Y23	RES,RK JUMPER1/16-CP
R854	06S15616Y23	RES,RK JUMPER1/16-CP
R855	06S15615Y25	RES,RK 101J 1/16 -CP
R856	06S15615Y73	RES,RK 103J 1/16 -CP
R857	06S15615Y73	RES,RK 103J 1/16 -CP
R858	06S15615Y25	RES,RK 101J 1/16 -CP
R859	06S15615Y25	RES,RK 101J 1/16 -CP
R860	06S15615Y73	RES,RK 103J 1/16 -CP
R861	06S45674W02	RES,RK 2R7J 1/10 -CP
R862	06S45674W02	RES,RK 2R7J 1/10 -CP
R863	06S45674W02	RES,RK 2R7J 1/10 -CP
R864	06S45674W02	RES,RK 2R7J 1/10 -CP
R865	06S45674W02	RES,RK 2R7J 1/10 -CP
R866	06S45674W02	RES,RK 2R7J 1/10 -CP
R867	06S45674W02	RES,RK 2R7J 1/10 -CP
R868	06S45674W02	RES,RK 2R7J 1/10 -CP
R869	06S45674W02	RES,RK 2R7J 1/10 -CP
R870	06S45674W02	RES,RK 2R7J 1/10 -CP
R872	06S45675W45	RES,RK 1R0J 1/10 -CP
R873	06S45675W45	RES,RK 1R0J 1/10 -CP

R874	06S45675W45	RES,RK 1R0J 1/10 -CP
R875	06S45675W45	RES,RK 1R0J 1/10 -CP
R876	06S15615Y33	RES,RK 221J 1/16 -CP
R877	06S15615Y27	RES,RK 121J 1/16 -CP
R878	06S15615Y73	RES,RK 103J 1/16 -CP
R880	06S15616Y23	RES,RK JUMPER1/16-CP
R881	06S15615Y73	RES,RK 103J 1/16 -CP
R882	06S15615Y81	RES,RK 223J 1/16 -CP
R883	06S15615Y25	RES,RK 101J 1/16 -CP
R884	06S15615Y73	RES,RK 103J 1/16 -CP
R885	06S15615Y81	RES,RK 223J 1/16 -CP
R886	06S15615Y25	RES,RK 101J 1/16 -CP
R889	06S15615Y25	RES,RK 101J 1/16 -CP
R890	06S15615Y81	RES,RK 223J 1/16 -CP
R891	06S15616Y23	RES,RK JUMPER1/16-CP
R896	06S15615Y73	RES,RK 103J 1/16 -CP
R897	06S15615Y73	RES,RK 103J 1/16 -CP
R901	06S15616Y32	RES,RK 6R8J 1/16 -CP
R902	06-02713Z03	RES,RK 223D 1/16 -CP
R903	06-02713Z01	RES,RK 33RD 1/16 -CP
R904	06-02712Z01	RES,RK 121D 1/16 -CP
R905	06-02712Z04	RES,RK 471D 1/16 -CP
R906	06S15616Y23	RES,RK JUMPER1/16-CP
R907	06S15616Y23	RES,RK JUMPER1/16-CP
R911	06-02741Z01	RES,RK 331D 1/16 -CP
R912	06-02741Z01	RES,RK 331D 1/16 -CP
R913	06S15615Y09	RES,RK 22RJ 1/16 -CP
R914	06S45674W45	RES,RK 331J 1/10 -CP
R915	06S45674W45	RES,RK 331J 1/10 -CP
R921	06S15593Y37	RES,RK 331F 1/10 -CP
R922	06S15593Y37	RES,RK 331F 1/10 -CP
R923	06S15615Y09	RES,RK 22RJ 1/16 -CP
R924	06S45674W45	RES,RK 331J 1/10 -CP
R925	06S45674W45	RES,RK 331J 1/10 -CP
R926	06S15615Y31	RES,RK 181J 1/16 -CP
R927	06S45675W43	RES,RK JUMPER1/10-CP
SD801	48T75104Y01	DIO,SHT RB521G-30-CP
SD802	48T75104Y01	DIO,SHT RB521G-30-CP
TH601	48T75201Y03	TMT,NCP15XH103F0S-CP
TH602	48T75201Y03	TMT,NCP15XH103F0S-CP
XL601	91T75115Y01	XTL,FXO-64FL2 27M-E2
Z571	91T75196Y03	EMI,BK1005LL100 -CP
Z572	91T75196Y03	EMI,BK1005LL100 -CP
Z573	91T75196Y03	EMI,BK1005LL100 -CP
Z574	91T75196Y03	EMI,BK1005LL100 -CP
Z575	91T75196Y15	EMI,BK1005HM121 -CP
Z576	91T75196Y15	EMI,BK1005HM121 -CP
Z577	91T75196Y15	EMI,BK1005HM121 -CP
Z578	91T75196Y15	EMI,BK1005HM121 -CP
Z579	91T75196Y15	EMI,BK1005HM121 -CP
Z580	91T75196Y15	EMI,BK1005HM121 -CP
Z581	91T75196Y24	EMI,BK1005LL241 -CP
Z582	91T75196Y03	EMI,BK1005LL100 -CP
Z583	91T75196Y03	EMI,BK1005LL100 -CP
Z584	91T75196Y03	EMI,BK1005LL100 -CP
Z585	91T75196Y03	EMI,BK1005LL100 -CP
Z586	91T75196Y03	EMI,BK1005LL100 -CP

Z840	91T75196Y13	EMI,BK1005HS241 -CP
Z841	91T75196Y13	EMI,BK1005HS241 -CP
Z842	91T75196Y13	EMI,BK1005HS241 -CP
Z843	91T75196Y13	EMI,BK1005HS241 -CP
Z845	91T75196Y13	EMI,BK1005HS241 -CP
Z846	91T75196Y13	EMI,BK1005HS241 -CP
Z847	91T75196Y13	EMI,BK1005HS241 -CP
Z848	91T75196Y13	EMI,BK1005HS241 -CP
ZD901	48T55269Y01	DIO,ZEN LM4041CIM3CP

======= Miscellaneous

ANT001	01T03151K07	ASSY,ANT CABLE9860A
CB802	24-02502Z01	ASSY,W277A001 -DB
CH401	09-02417Z01	BTB,DF15-P -B
CH501	09-02418Z01	BTB,DF15-S -DB
DIN801	09T55071W11	CON,TCP9389-11 -DT
ET301	01T35497Y46	ASSY,WIRE 9860A
JK301	09-02179Z01	RCA,NLT1989-0 -DB
LCD401	65-00957Z01	LCD,GTD-22607AAHK-CU
M801	59T55190Y19	MOTOR,F2510CT-12UCV
SW420	40-01691Z01	ENC,EC12E24244A3 -DB

=======DV37M150

HD101	EP-00830Z01	ED21A51L
M101	59-01510Z01	MOTOR,M1N10FB95G
M102	59-02071Z01	MOTOR,24C0303020
M103	59T65142Y01	MOTOR,MSDV020L01
SW406	40T15494Y12	SW,DETCT SPVG2303-E6
SW801	40T55230Y01	SW,DETCT ESE13V01CE5
SW802	40T55230Y01	SW,DETCT ESE13V01CE5
SW803	40T55043Y02	SW,DETCT SPVL12 -E5
SW804	40T15494Y12	SW,DETCT SPVG2303-E6
SW805	40T55230Y01	SW,DETCT ESE13V01CE5

Exploded View (Cabinet)

(DVD Unit)

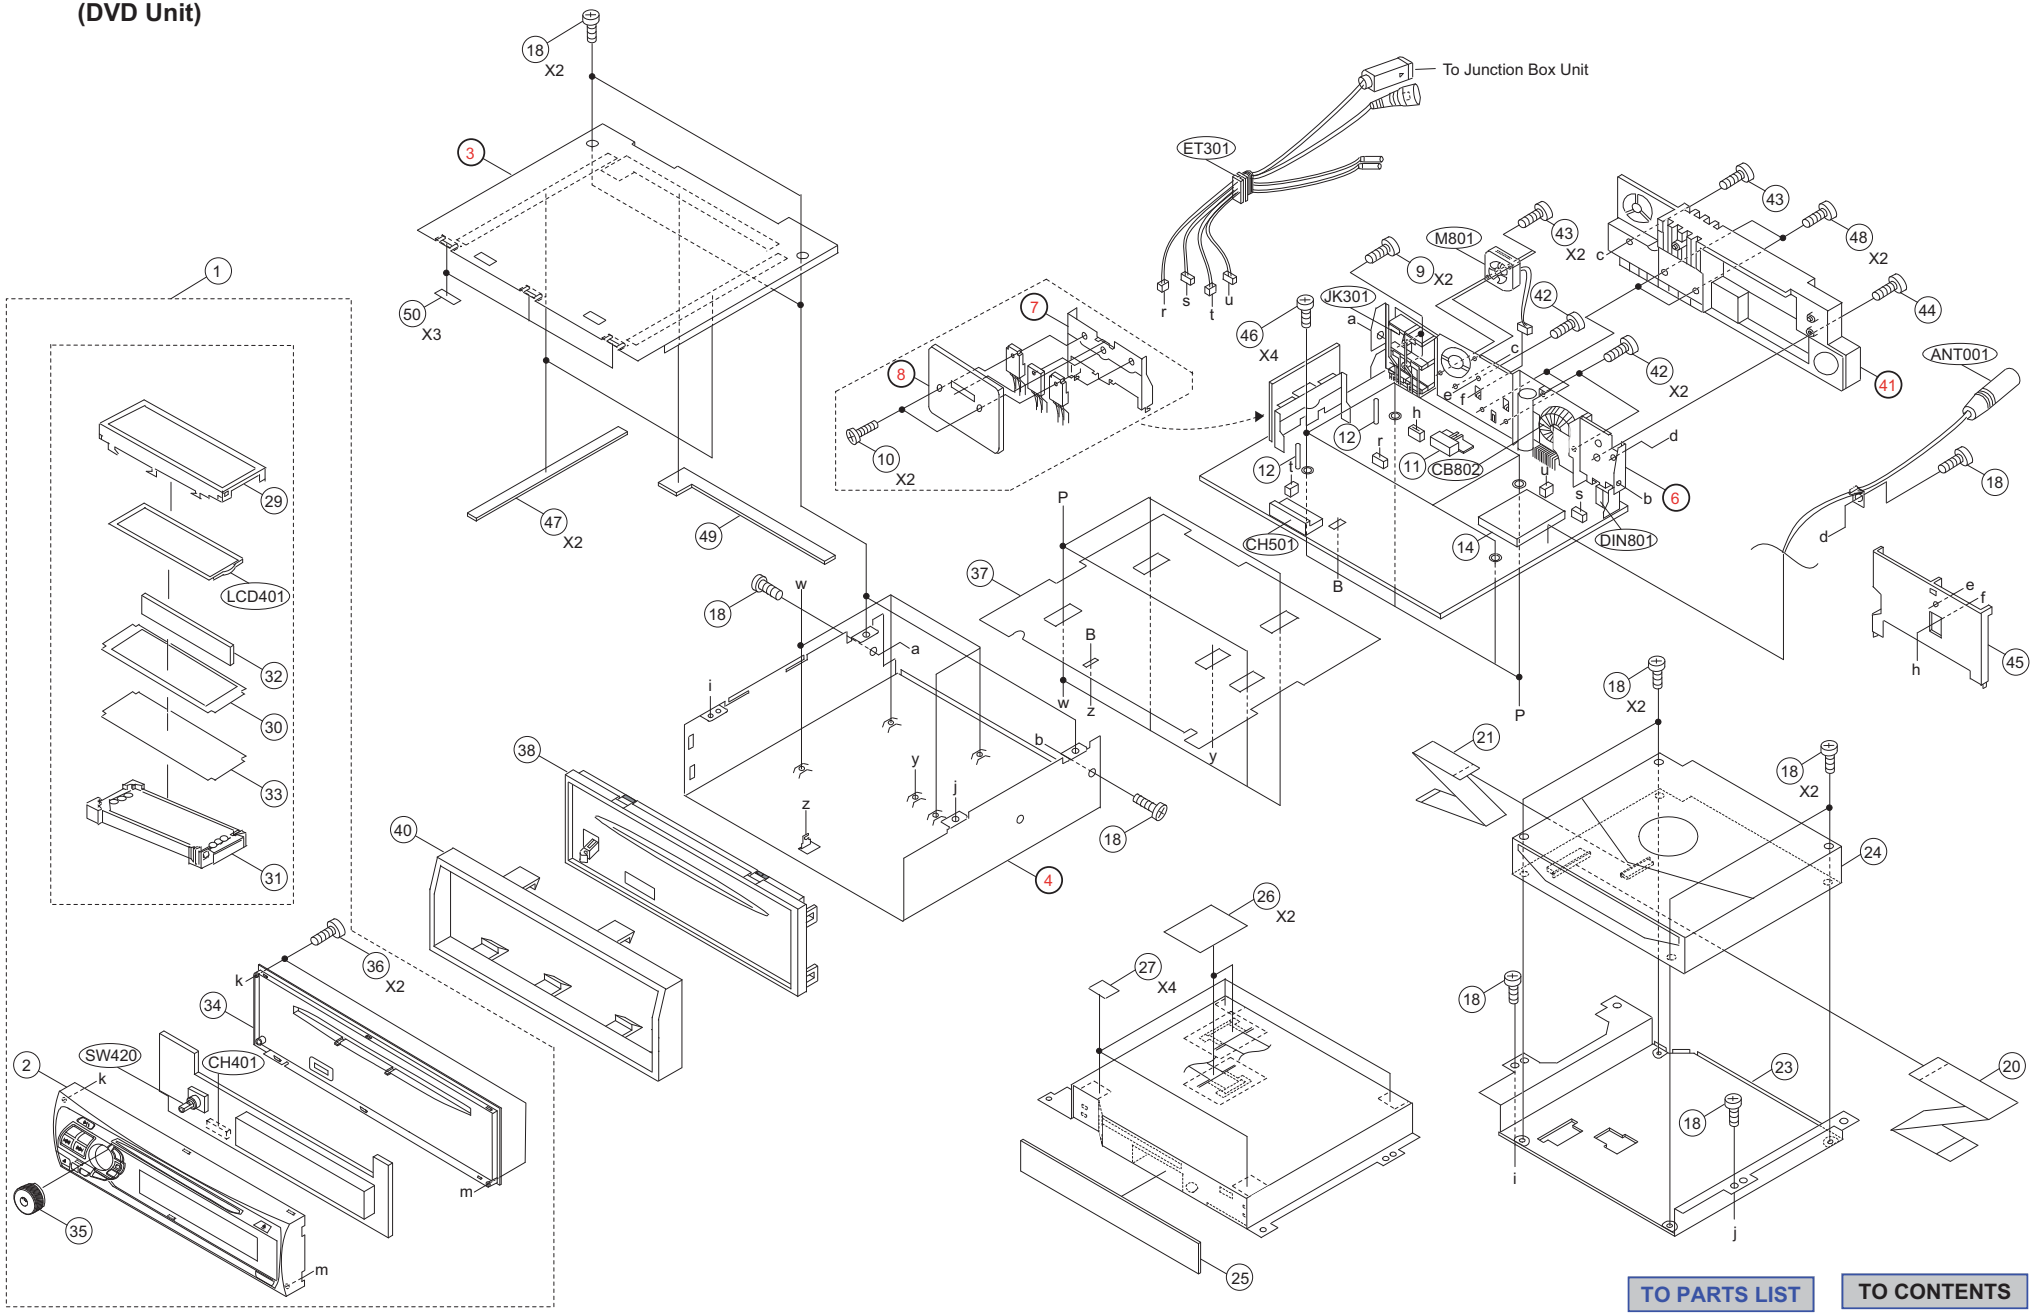

TO PARTS LIST
TO CONTENTS

Cabinet Assembly Parts List (DVD Unit)

NOTE : The part that has not PART NUMBER will not be supplied.

#1 : For North American Model Only,
$1 : For General Foreign(Region3) Model Only,
%1 : For General Foreign(Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

#1	1	66-02140Z74	ASSY,NOSE UNIT HBAL401A
$1	1	66-02140Z80	ASSY,NOSE UNIT HBAP401A
%1	1	66-02140Z80	ASSY,NOSE UNIT HBAP401A
&1	1	66-02140Z80	ASSY,NOSE UNIT HBAP401A
#1	2	EN-01949Z06	NOSE,PIECE ASSY(H)
$1	2	EN-01949Z09	NOSE,PIECE ASSY(H)
%1	2	EN-01949Z09	NOSE,PIECE ASSY(H)
&1	2	EN-01949Z09	NOSE,PIECE ASSY(H)
	3	- - - - - - - - - - -	COVER,TOP
	4	- - - - - - - - - - -	CHAS,BASE
	6	- - - - - - - - - - -	BKT,CHAS REAR
	7	- - - - - - - - - - -	BKT,IC(DVD)
	8	- - - - - - - - - - -	HEAT,SINK(IC)
	9	03S60825Y04	SCR,B-T 3X8 ZN A
	10	03S60822Y19	SCR,S-T 2.6X10 ZN A
	11	36A04141K02	KNOB,SLIDE
	12	09T84840F01	LUG,STYLE 18MM
	14	TU-02088Z01	TUNER,MX-A196F(TU1)
	18	03S60822Y12	SCR,S-T 2.6X6 ZN A
	20	30-02544Z02	SML2CD45X112ADX6(BL)
	21	30-02545Z01	SML2SC24(5)X132-ADX6
	23	07-01966Z01	BKT,MECH(DVD)
	24	DV-02996Z01	DV37M150
	25	75-04519Z01	CUSHION,RUBBER(C)
	26	14-04518Z01	INSULATOR,COVER
	27	14S70565Y74	INS,CVR 16X16XT0.1
	29	15-01813Z01	COVER,LCD
	30	26A01773K01	REFLECTOR,SHEET
	31	15-01814Z01	CASE,LCD ASSY
	32	75-02419Z01	RUBBER,ELECTRIC
	33	26A41975Y02	REFLECTOR,SHEET(A)
	34	13-01810Z01	NOSE,BOTTOM
	35	36-01850Z01	KNOB,ROTARY ASSY
	36	03S71677F57	SCR,B-TITE MI.7X8
	37	14-02191Z01	INSULATOR,MAIN
	38	13-02128Z03	NOSE,BASE ASSY
	40	33C04102K03	FACE,PLATE
	41	- - - - - - - - - - -	HEAT,SINK(REAR)
	42	03S60825Y04	SCR,B-T 3X8 ZN A
	43	03S60822Y22	SCR,S-T 2.6X14 ZN A
	44	03S60822Y19	SCR,S-T 2.6X10 ZN A
	45	15-01971Z01	COVER,IC
	46	03T25225Y01	SCR,GND
	47	75S61553Y80	CUS,RUB 115X3XT2.5
	48	03S60822Y23	SCR,S-T 2.6X16 ZN A
	49	75-04521Z01	CUSHION,RUBBER(A)

50	14S70565Y73	INS,CVR 18X3XT0.1

Exploded View (DVD Deck Mechanism)

(DV37M150)

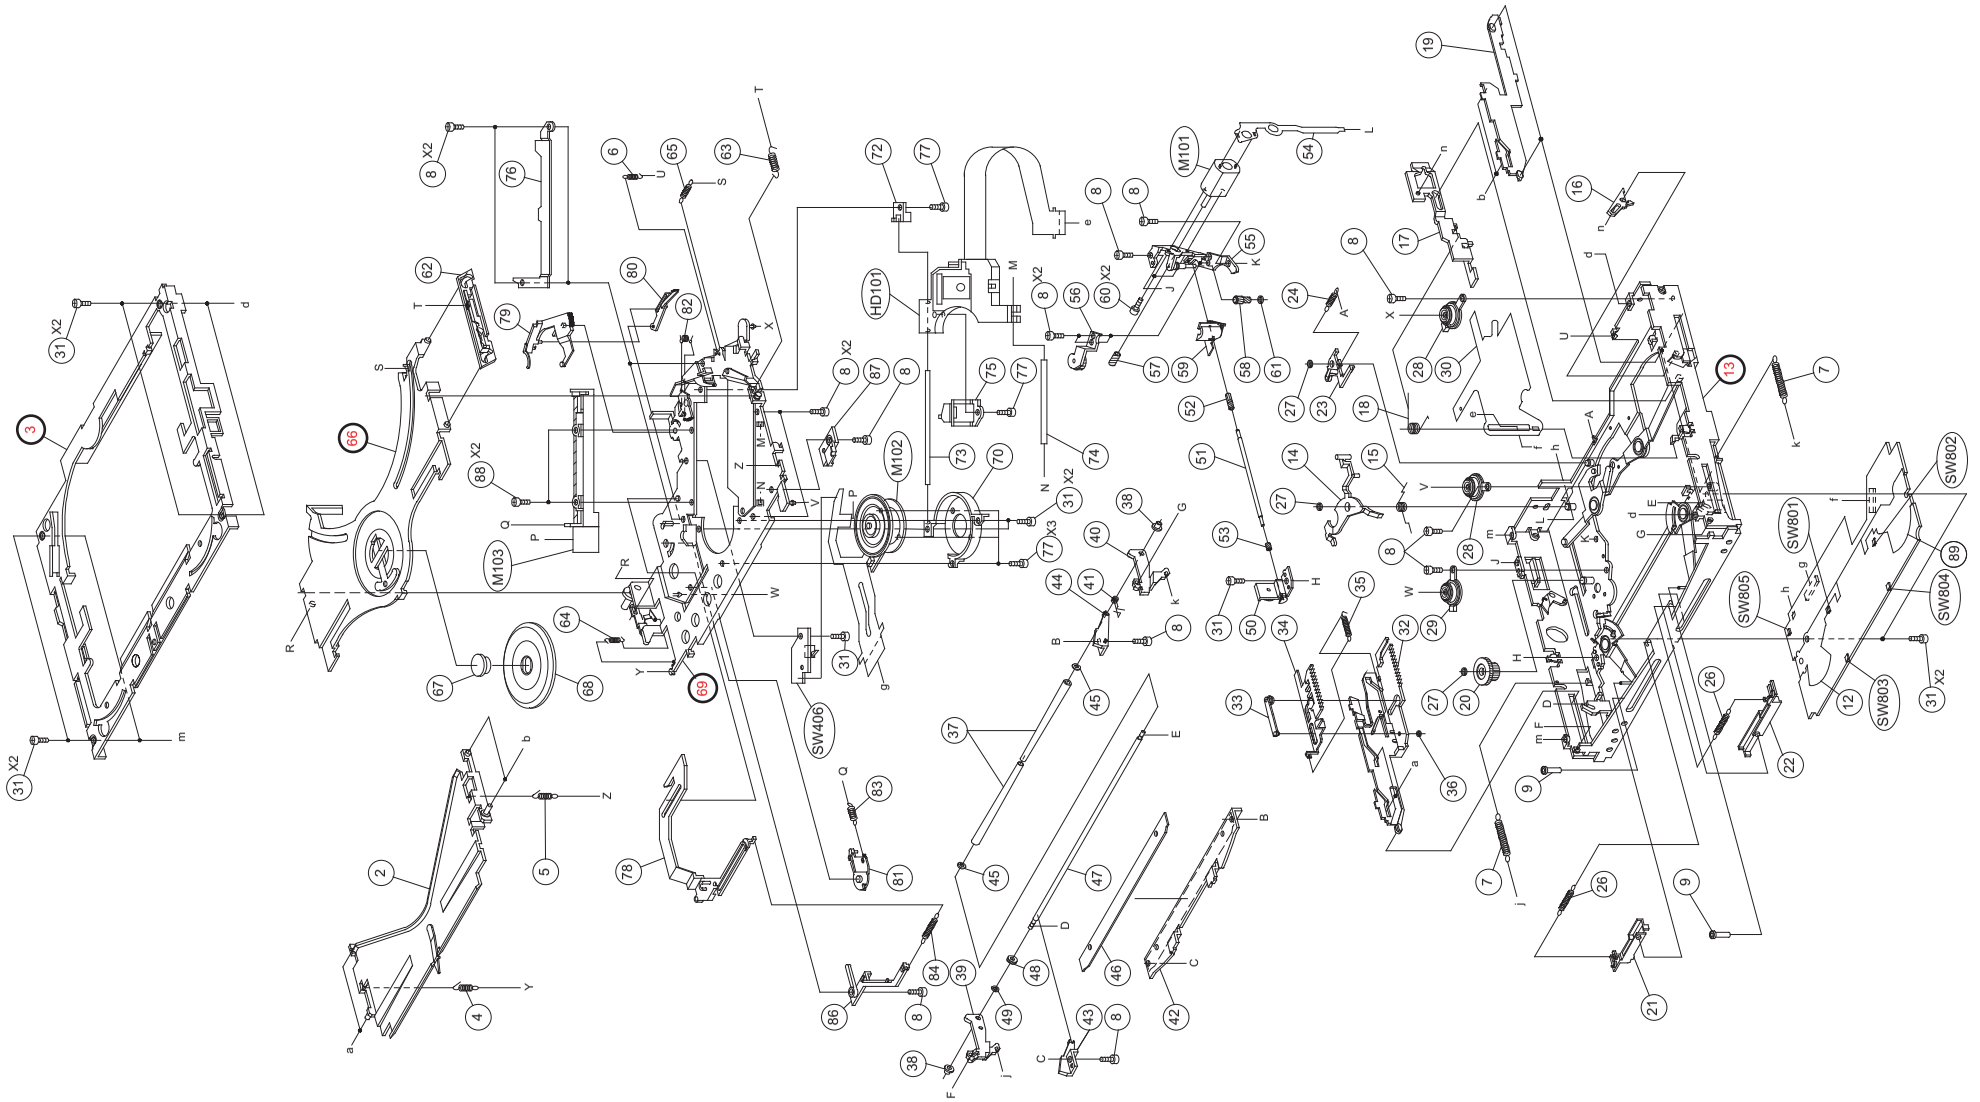

TO PARTS LIST TO CONTENTS

DVD Deck Mechanism Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

2	01A51490Y23	ASSY,RIV GUIDE TOP
3	- - - - - - - - - - -	CHASSIS,TOP
4	41A60338Y01	SPRING,DRIVE F-L
5	41A60339Y01	SPRING,DRIVE F-R
6	41A60340Y01	SPRING,DRIVE R
7	41A60344Y01	SPRING,LEV ROLL-L
8	03S94385F19	SCR,NYLOK M2X2.5
9	43-01050Z02	ROLLER,DISC PIN
12	14-01064Z01	INSULATOR,PWB L2
13	- - - - - - - - - - -	ASSY,RIV CHAS BASE
14	45C51003Y10	LEVER,TRIGER MAIN
15	41A51395Y01	SPRING,LEV TRG MAIN
16	45A50833Y11	LEVER,LINK SLDR(R)
17	45B51221Y11	SLIDER,LOCK(R2)
18	41A51396Y01	SPRING,SLD LOCK(R2)
19	45C51237Y10	SLIDER,LOCK(R1)
20	44-02002Z02	GEAR,LOAD (E2)
21	45-01051Z02	SLIDER,DISC SW(L)
22	45-01052Z02	SLIDER,DISC SW(R)
23	45B50838Y11	LEVER,LOCK(RC)
24	41A60343Y01	SPRING,LEV LOCK-RC
26	41-02948Z01	SPRING,LEV DISC
27	04B41345P14	WASH,L. 2.1X4X0.25
28	75C60456Y03	DAMPER,DV-TM
29	75C60456Y02	DAMPER,DV-TM
30	14A51712Y01	INSULATOR,FPC
31	03S94385F07	SCR,NYLOK M2X2
32	45D51236Y10	SLIDER,LOCK(L)
33	01A51491Y11	ASSY,RIV LEV ASST
34	44-02001Z03	ASSY,SLIDER TRIGER 2
35	41A60348Y01	SPRING,SLD TRIGER
36	04B41345P15	WASH,1.2X3.5X0.35
37	49A51397Y03	ROLLER,DV-TM
38	43A51228Y11	BUSH,ARM GUIDE
39	45-02722Z02	LEVER,ROLLER(L)2
40	45-02723Z02	LEVER,ROLLER(R)2
41	41A60360Y01	SPRING,ARM GUIDE
42	45-01385Z02	ARM,DISC GUIDE
43	45B60959Y11	ARM,DISC GUIDE-L
44	45B60960Y11	ARM,DISC GUIDE-R
45	04S40075G09	WASH,2.6X4.7X0.25
46	14A61435Y01	INSULATOR,ARM DISC
47	47A51349Y01	SHAFT,ROLLER
48	44-01531Z02	GEAR,ROLLER-2
49	04B41345P02	WASH,1.7X3.5X0.25
50	07-01606Z02	ASSY,RIV BKT LD-F-3
51	47-01479Z01	SHAFT,LOAD
52	44A50827Y11	GEAR,LOAD(C)
53	44-01532Z02	GEAR,LOAD(F)-2
54	84-01207Z01	FPC,LOAD
55	07-01177Z02	ASSY,RIV BKT LOAD(R)
56	01A51487Y11	ASSY,RIV BKT LD-R2

57	44A50825Y11	GEAR,LOAD(A)
58	44A50826Y11	GEAR,LOAD(B)
59	07B51226Y11	BKT,SHAFT LOAD
60	03S30688Y17	SCR,MCH M1.4X2
61	04B41345P11	WASH,1.2X2.5X0.25
62	45B51235Y10	SLIDER,ARM LIFT(R)
63	41A60336Y01	SPRING,CLAMP-R
64	41A60335Y01	SPRING,CLAMP-L
65	41A60337Y01	SPRING,CLAMP-RTL
66	- - - - - - - - - - -	ASSY,RIV ARM CLAMP
67	43-01054Z02	STOPPER,CLAMP
68	43-01049Z02	TABLE,CLAMPER
69	- - - - - - - - - - -	ASSY,RIV CHAS PICKUP
70	07-01053Z02	BKT,SPINDLE ADJUST
72	07A50823Y11	BKT,SHAFT PICKUP
73	47A51347Y01	SHAFT,PICKUP MAIN
74	47-01057Z01	SHAFT,PICKUP SUB
75	41B50836Y11	SPRING,NUT
76	15A51210Y11	COVER,MAIN
77	03S94385F09	SCR,NYLOK M2X3 P2
78	45C51234Y02	SLIDER,8CM
79	01B61577Y10	ASSY,RIV LEVER-8L
80	45A51231Y10	LEVER,TRIGER 8CM
81	45-02638Z02	LEVER,TRIGER SUB2
82	41A51394Y01	SPRING,LEV 8CM(L)
83	41A60346Y01	SPRING,LEV TRG-SUB
84	41A60347Y01	SPRING,SLD 8CM
86	07A60069Y11	BKT,SLIDER 8CM
87	15B61279Y11	SPACER,DAMPER
88	03S94385F98	SCR,NYLOK M2X2.5
89	14-01063Z01	INSULATOR,PWB R2

Electrical Parts List (Junction Box Unit)

* Each parts on P.W.Board are described in order of the reference number.

=======OPT P.W.Board

C850	08S45676W65	CAP,CER.222K-B1H -CP
C851	08S45676W85	CAP,CER 104K-B1C -CP
C857	08S65670Y01	CAP,CER 106KX5R1C-CP
C858	08S45676W80	CAP,CER 223K-B1E -CP
CB850	09T03498K10	WTB,53253-1010 -DB
IC851	51T25183Y02	TC7SET08FU-EL -CP
R851	06S55365Y29	RES,RK 33RJ 1/10 -CP
R854	06S55366Y31	RES,RK 514J 1/10 -CP
R855	06S55365Y37	RES,RK 68RJ 1/10 -CP
R857	06S55365Y29	RES,RK 33RJ 1/10 -CP
R858	06S55361Y87	RES,RK 822J 1/4 -CP
R863	06S55365Y65	RES,RK 102J 1/10 -CP

======= Miscellaneous

ET850	01T35497Y48	ASSY,OPT WIRE 9860A
IC852	51T45264W02	TOTX193K -NS
JK851	09T03156K01	JAC,CK-3.5-14 -DB

Exploded View (Cabinet)

(Junction Box Unit)

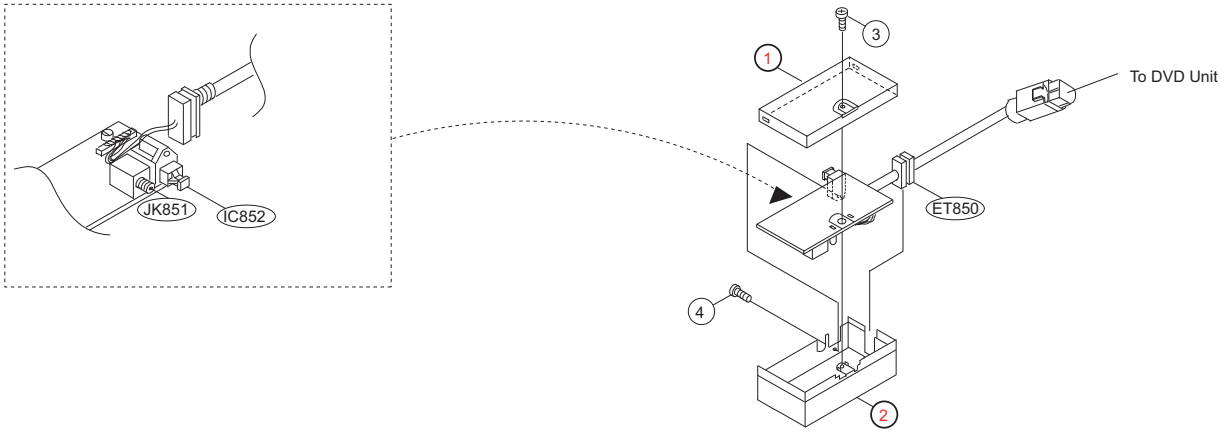

TO PARTS LIST
TO CONTENTS

Cabinet Assembly Parts List (Junction Box Unit)

NOTE : The part that has not PART NUMBER will not be supplied.

1	- - - - - - - - - - -	CASE,TOP
2	- - - - - - - - - - -	CASE,BOTTOM
3	03S60822Y12	SCR,S-T 2.6X6 ZN A
4	03S60825Y04	SCR,B-T 3X8 ZN A