


Packing Assembly Parts List

Symbol No.	Part No.	Description	Symbol No.	Part No.	Description
#1 101	68-08564Z33	MANUAL,OWNER'S(AO)	105	03E36691S01	WRENCH,2X2.3
\$1 101	68-08564Z34	MANUAL,OWNER'S(GO)	106	03E36692S01	WRENCH,4X4.6
%1 101	68-08564Z34	MANUAL,OWNER'S(GO)	107	03E39493S01	SCR,M2.6X14(P)(WHT)
&1 101	68-09359Z04	MANUAL,OWNER'S(CO)	108	03E39500S01	SCR,M4X36(WSP)(BLK)
\$1 102	68-08564Z35	MANUAL,OWNER'S(IGS)	109	03E39508S01	SCR,M4X40(WP)(BLK)
103	09E39816S01	CONN,PLUG 2P			
104	42E39219S01	JOINT,TOP			


NOTE : #1 : For North American Model Only, \$1 : For European Model Only, %1 : For General Foreign Model Only,
&1 : For Chinese Model Only, Others : Common.

Packing Method View

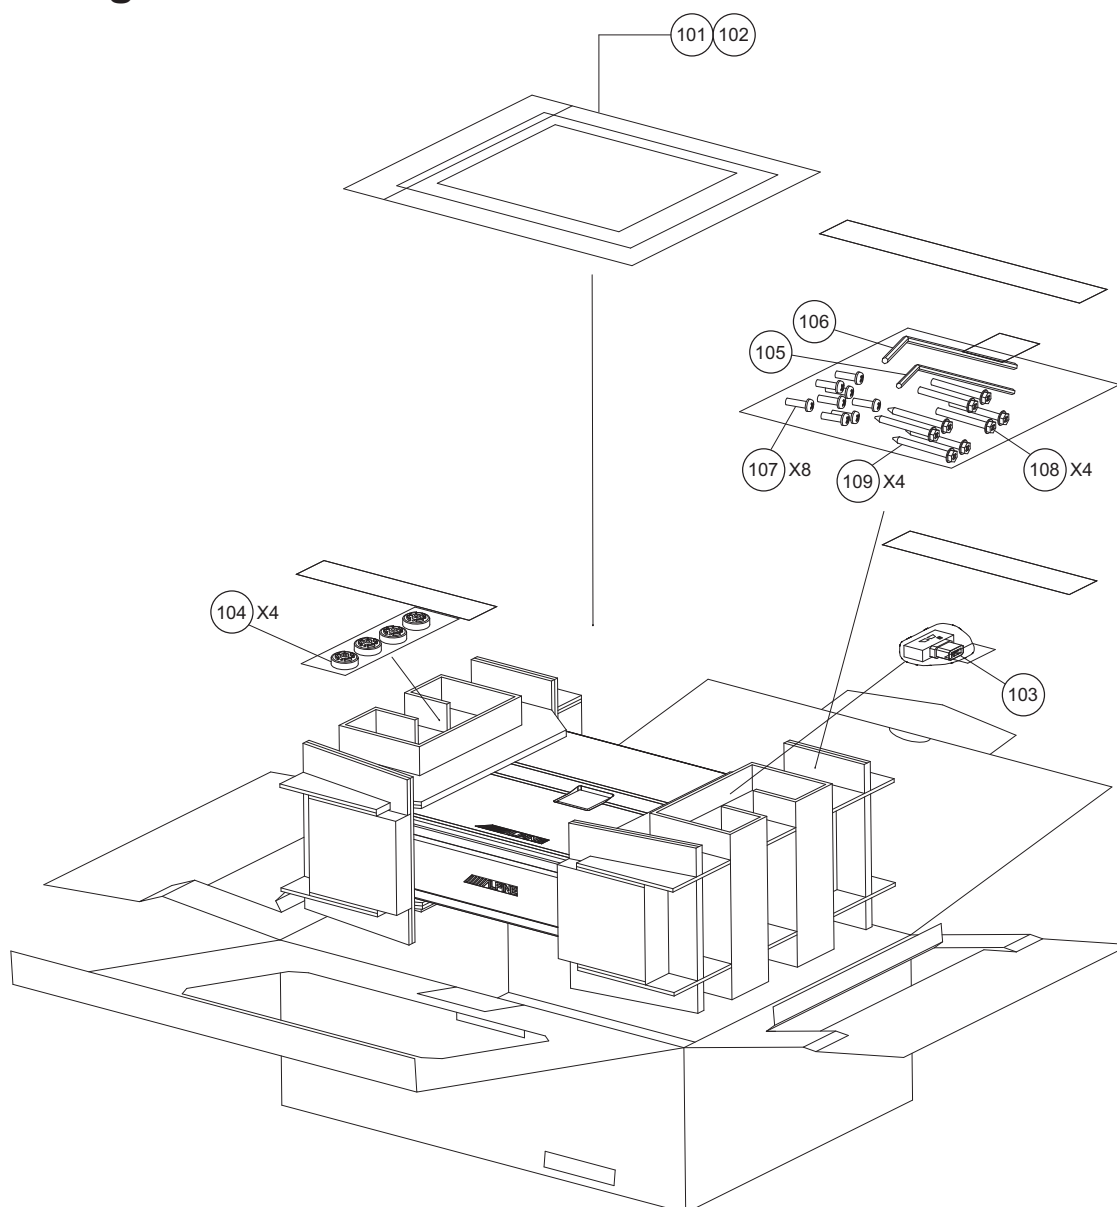

Extension Cable

*Always connect the Extension Cable when making checks of voltage and repair.

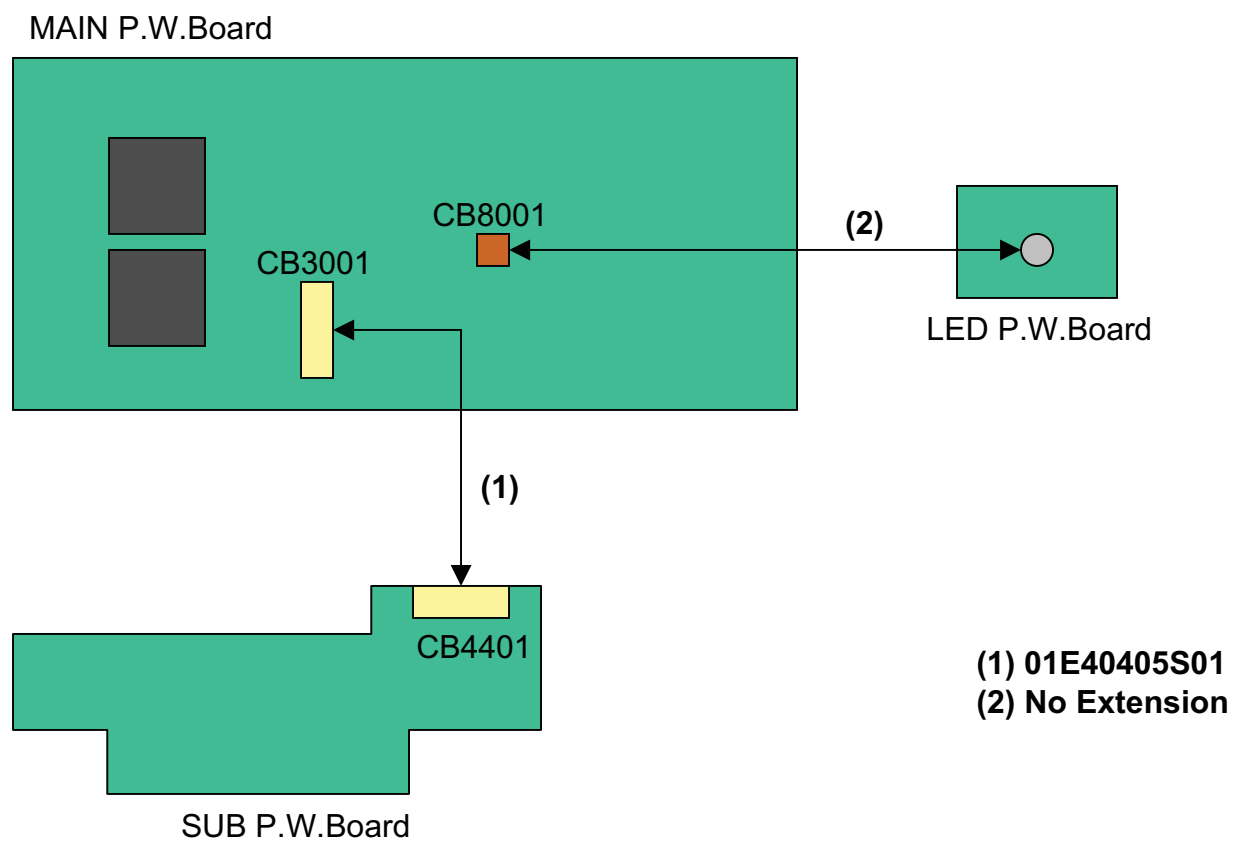

Electrical Parts List

* Each parts on P.W.Board are described in order of the reference number.

=====MAIN P.W.Board

C3001	08E38101S01	CAP,FILM 1500pF/50V
C3002	08E38101S01	CAP,FILM 1500pF/50V
C3003	08E38101S01	CAP,FILM 1500pF/50V
C3004	08E38101S01	CAP,FILM 1500pF/50V
C3005	08E37117S01	CAP,CER. 100pF/50V
C3006	08E36472S01	CAP,CER. 0.1uF/50V
C3007	08E36472S01	CAP,CER. 0.1uF/50V
C3008	08E37117S01	CAP,CER. 100pF/50V
C3009	08E37150S01	CAP,CER. 330pF/50V
C3010	08E37150S01	CAP,CER. 330pF/50V
C3011	08E36629S01	CAP,CER. 0.047uF/50V
C3012	08E36629S01	CAP,CER. 0.047uF/50V
C3013	08E36629S01	CAP,CER. 0.047uF/50V
C3014	08E31179S01	CAP,CER. 180pF/50V
C3015	08E31179S01	CAP,CER. 180pF/50V
C3016	08E31179S01	CAP,CER. 180pF/50V
C3017	08E31179S01	CAP,CER. 180pF/50V
C3301	08E34596S01	CAP,CER. 0.47uF/25V
C3302	08E36629S01	CAP,CER. 0.047uF/50V
C3303	08E36629S01	CAP,CER. 0.047uF/50V
C3304	08E36629S01	CAP,CER. 0.047uF/50V
C3601	08E36680S01	CAP,CER. 1000pF/50V
C3602	08E36680S01	CAP,CER. 1000pF/50V
C3603	08E39107S01	CAP,CER.0.33uF/100V
C3604	08E39107S01	CAP,CER.0.33uF/100V
C3701	08E39107S01	CAP,CER.0.33uF/100V
C3702	08E39107S01	CAP,CER.0.33uF/100V
C3703	08E39107S01	CAP,CER.0.33uF/100V
C3704	08E39107S01	CAP,CER.0.33uF/100V
C3801	08E36472S01	CAP,CER. 0.1uF/50V
C3802	08E36472S01	CAP,CER. 0.1uF/50V
C3901	08E39178S01	CAP,CER. 0.015uF/50V
C3902	08E39178S01	CAP,CER. 0.015uF/50V
C3903	08E39178S01	CAP,CER. 0.015uF/50V
C3904	08E39178S01	CAP,CER. 0.015uF/50V
C4001	08E39105S01	CAP,CER.1500pF/500V
C4002	08E39105S01	CAP,CER.1500pF/500V
C4003	08E39770S01	CAP,MYL. 1uF/250V
C4004	08E39770S01	CAP,MYL. 1uF/250V
C4005	08E39115S01	CAP,METAL 1uF/100V
C4006	08E39115S01	CAP,METAL 1uF/100V
C4101	08E36472S01	CAP,CER. 0.1uF/50V
C4102	08E36625S01	CAP,CER. 1500 p F/50V
C4103	08E36625S01	CAP,CER. 1500 p F/50V
C4104	08E36629S01	CAP,CER. 0.047uF/50V
C4106	08E36472S01	CAP,CER. 0.1uF/50V
C4201	08E39770S01	CAP,MYL. 1uF/250V
C4202	08E39103S01	CAP,CER.1000pF/500V
C4203	08E39186S01	CAP,CER.2200pF/500V
C4204	08E39103S01	CAP,CER.1000pF/500V
C4205	08E39186S01	CAP,CER.2200pF/500V

C4206	08E39106S01	CAP,CER.100pF/500V
C4207	08E39106S01	CAP,CER.100pF/500V
C4901	08E36472S01	CAP,CER. 0.1uF/50V
C5001	08E36472S01	CAP,CER. 0.1uF/50V
C5002	08E36472S01	CAP,CER. 0.1uF/50V
C5003	08E35262S01	CAP,CER. 0.022uF/50V
C5004	08E36472S01	CAP,CER. 0.1uF/50V
C5005	08E36574S01	CAP,FILM 6800pF/50V
C5006	08E28771S01	CAP,CER. 0.01uF/50V
C5007	08E36472S01	CAP,CER. 0.1uF/50V
C5008	08E36472S01	CAP,CER. 0.1uF/50V
C5009	08E36472S01	CAP,CER. 0.1uF/50V
C5010	08E36472S01	CAP,CER. 0.1uF/50V
C5011	08E36472S01	CAP,CER. 0.1uF/50V
C5012	08E36472S01	CAP,CER. 0.1uF/50V
C5013	08E36472S01	CAP,CER. 0.1uF/50V
C5014	08E36472S01	CAP,CER. 0.1uF/50V
C8901	08E36472S01	CAP,CER. 0.1uF/50V
C8902	08E36472S01	CAP,CER. 0.1uF/50V
C9001	08E39106S01	CAP,CER.100pF/500V
C9002	08E39106S01	CAP,CER.100pF/500V
C9003	08E39106S01	CAP,CER.100pF/500V
C9004	08E39106S01	CAP,CER.100pF/500V
C9005	08E39106S01	CAP,CER.100pF/500V
C9101	08E28771S01	CAP,CER. 0.01uF/50V
C9301	08E39178S01	CAP,CER. 0.015uF/50V
C9302	08E39178S01	CAP,CER. 0.015uF/50V
C9303	08E39178S01	CAP,CER. 0.015uF/50V
C9304	08E39178S01	CAP,CER. 0.015uF/50V
C9701	08E28771S01	CAP,CER. 0.01uF/50V
C9702	08E36472S01	CAP,CER. 0.1uF/50V
C9703	08E36574S01	CAP,FILM 6800pF/50V
C9704	08E36472S01	CAP,CER. 0.1uF/50V
C9801	08E36472S01	CAP,CER. 0.1uF/50V
C9804	08E39178S01	CAP,CER. 0.015uF/50V
C9901	08E39186S01	CAP,CER.2200pF/500V
C9902	08E39186S01	CAP,CER.2200pF/500V
C9903	08E39186S01	CAP,CER.2200pF/500V
C9904	08E39186S01	CAP,CER.2200pF/500V
C9905	08E36472S01	CAP,CER. 0.1uF/50V
C9906	08E36472S01	CAP,CER. 0.1uF/50V
C9907	08E36680S01	CAP,CER. 1000pF/50V
C9908	08E36680S01	CAP,CER. 1000pF/50V
C9911	08E36472S01	CAP,CER. 0.1uF/50V
C9912	08E36472S01	CAP,CER. 0.1uF/50V
C9914	08E36680S01	CAP,CER. 1000pF/50V
C9915	08E36680S01	CAP,CER. 1000pF/50V
C9916	08E36680S01	CAP,CER. 1000pF/50V
CB3001	01E40353S01	ASSY,CONN 10P
CB8001	09E27780S01	CONN,WTB 02P
CL5001	91E39901S01	RESONATOR,7.7MHz
D3001	48E37927S01	DIODE,1SS355
D3002	48E37927S01	DIODE,1SS355
D3301	48E37927S01	DIODE,1SS355
D3302	48E37927S01	DIODE,1SS355
D3601	48E39122S01	DIODE,MURS120
D3602	48E39122S01	DIODE,MURS120

D3701	48E39123S01	DIODE,SK2BS
D3702	48E39123S01	DIODE,SK2BS
D3703	48E39123S01	DIODE,SK2BS
D3704	48E39123S01	DIODE,SK2BS
D4101	48E40338S01	DIODE,KDR720E
D4102	48E40338S01	DIODE,KDR720E
D5001	48E39121S01	DIODE,GN1D
D5002	48E36568S01	DIODE,DAN202K
D5003	48E40338S01	DIODE,KDR720E
D9001	48E40337S01	DIODE,NSD03A40
D9101	48E39121S01	DIODE,GN1D
D9102	48E39100S01	DIODE,RLS-73 90V
D9501	48E39100S01	DIODE,RLS-73 90V
D9502	48E36568S01	DIODE,DAN202K
D9901	48E39388S01	DIODE,MURA110
D9902	48E39388S01	DIODE,MURA110
D9903	48E39388S01	DIODE,MURA110
D9904	48E39388S01	DIODE,MURA110
D9905	48E39878S01	DIODE,KCF25A20
D9906	48E39388S01	DIODE,MURA110
D9907	48E39879S01	DIODE,C25P20FR
E3001	23E38004S01	CAP,ELY. 10uF/50V
E3002	23E38004S01	CAP,ELY. 10uF/50V
E3003	23E38004S01	CAP,ELY. 10uF/50V
E3701	23E39862S01	CAP,ELY. 10uF/200V
E3702	23E39862S01	CAP,ELY. 10uF/200V
E3703	23E39862S01	CAP,ELY. 10uF/200V
E3704	23E39862S01	CAP,ELY. 10uF/200V
E3901	23E38004S01	CAP,ELY. 10uF/50V
E3902	23E38004S01	CAP,ELY. 10uF/50V
E3903	23E39181S01	CAP,ELY. 220uF/16V
E3904	23E39181S01	CAP,ELY. 220uF/16V
E4901	23E38001S01	CAP,ELY. 2.2uF/50V
E4902	23E39181S01	CAP,ELY. 220uF/16V
E5001	23E40237S01	CAP,ELY. 33uF/16V
E5002	23E38017S01	CAP,ELY. 470uF/10V
E8901	23E38004S01	CAP,ELY. 10uF/50V
E8902	23E38004S01	CAP,ELY. 10uF/50V
E9101	23E39865S01	CAP,ELY. 470uF/25V
E9201	23E39865S01	CAP,ELY. 470uF/25V
E9301	23E40334S01	CAP,ELY. 1000uF/35V
E9302	23E40334S01	CAP,ELY. 1000uF/35V
E9303	23E39181S01	CAP,ELY. 220uF/16V
E9304	23E39181S01	CAP,ELY. 220uF/16V
E9701	23E40333S01	CAP,ELY. 330uF/10V
E9702	23E38019S01	CAP,ELY. 47uF/16V
E9703	23E38019S01	CAP,ELY. 47uF/16V
E9801	23E38006S01	CAP,ELY. 22uF/16V
E9901	23E39863S01	CAP,ELY. 2200uF/25V
E9902	23E39863S01	CAP,ELY. 2200uF/25V
E9903	23E39863S01	CAP,ELY. 2200uF/25V
E9904	23E39863S01	CAP,ELY. 2200uF/25V
E9907	23E40335S01	CAP,ELY. 5600uF/63V
E9908	23E40335S01	CAP,ELY. 5600uF/63V
E9909	23E40334S01	CAP,ELY. 1000uF/35V
IC3001	51E40216S01	IC,NJM2137V
IC3002	51E39132S01	IC,MC14069UBDR2G

IC3003	51E39133S01	IC,MC14081BDR2G
IC3004	51E39132S01	IC,MC14069UBDR2G
IC3301	51E38067S01	IC,KIC7S00FU
IC3302	51E39131S01	IC,KIC7SH08FU
IC3601	51E38058S01	IC,IR2010S
IC3602	51E38058S01	IC,IR2010S
IC3901	51E39601S01	IC,NJM78M05DL1A
IC3902	51E39603S01	IC,NJM79M05DL1A
IC4101	51E36570S01	IC,NJM2903V
IC4102	51E40343S01	IC,74VHC74MTCX
IC5001	51E36635S01	IC,NJU7222U50
IC5002	51E39139S01	IC,BD5243G
IC5003	51E40344S01	IC,BD5240G
IC5004	51-04615Z01	IC,TMP87C847UG-4RF3
IC5005	51E40342S01	IC,74VHC00MTCX
IC8901	51E39891S01	IC,NJM78M08DL1A
IC9301	51E39892S01	IC,NJM78M15DL1A
IC9302	51E39893S01	IC,NJM79M15DL1A
IC9701	51E36569S01	IC,uPC494GS-E1-A
IC9801	51E40345S01	IC,NJM78M09DL1A
IC9803	51E34504S01	IC,MC33152D
L4001	24E40347S01	COIL,CHOKE 15uH
L4002	24E40347S01	COIL,CHOKE 15uH
L9001	24E39739S01	COIL,IND. 10uH
LD8001	48E39873S01	LED,BLU UB1106WABC
LD8002	48E39873S01	LED,BLU UB1106WABC
LD8003	48E39345S01	LED,RED FR1106W
Q3301	48E38040S01	TR,DTA144EK
Q3302	48E22902S01	TR,2SC2412K
Q3303	48E22092S01	TR,DTA124EKA
Q3304	48E40339S01	TR,2N5400S
Q3305	48E40339S01	TR,2N5400S
Q3306	48E36572S01	TR,DTC124EKA
Q3601	48E38040S01	TR,DTA144EK
Q3701	48E39887S01	FET,IRFB4227
Q3702	48E39887S01	FET,IRFB4227
Q3703	48E39887S01	FET,IRFB4227
Q3704	48E39887S01	FET,IRFB4227
Q3705	48E39887S01	FET,IRFB4227
Q3706	48E39887S01	FET,IRFB4227
Q3707	48E39887S01	FET,IRFB4227
Q3708	48E39887S01	FET,IRFB4227
Q4901	48E20885S01	TR,KTD718-O-U
Q8001	48E22902S01	TR,2SC2412K
Q8002	48E40340S01	TR,DTC143XKA
Q8003	48E40340S01	TR,DTC143XKA
Q9101	48E22902S01	TR,2SC2412K
Q9102	48E39125S01	TR,KTB1241
Q9201	48E22902S01	TR,2SC2412K
Q9202	48E39126S01	TR,KTB985
Q9501	48E22555S01	TR,DTC144EK
Q9502	48E39883S01	TR,2SC4102
Q9503	48E39883S01	TR,2SC4102
Q9701	48E22092S01	TR,DTA124EKA
Q9901	48E40341S01	FET,IRF6648
Q9902	48E40341S01	FET,IRF6648
Q9903	48E40341S01	FET,IRF6648

Q9904	48E40341S01	FET,IRF6648
Q9905	48E40341S01	FET,IRF6648
Q9906	48E40341S01	FET,IRF6648
Q9907	48E40341S01	FET,IRF6648
Q9908	48E40341S01	FET,IRF6648
R3001	06E40332S01	RES,CF. 3K-1/4W
R3002	06E40332S01	RES,CF. 3K-1/4W
R3003	06E40187S01	RES,CF. 1K-1/16
R3004	06E40187S01	RES,CF. 1K-1/16
R3005	06E38034S01	RES,CF. 1K-1/4W
R3006	06E36098S01	RES,CF. 47K-1/4W
R3007	06E36098S01	RES,CF. 47K-1/4W
R3008	06E36464S01	RES,CF. 0-1/16W
R3009	06E38034S01	RES,CF. 1K-1/4W
R3010	06E36464S01	RES,CF. 0-1/16W
R3011	06E36464S01	RES,CF. 0-1/16W
R3012	06E36464S01	RES,CF. 0-1/16W
R3013	06E36464S01	RES,CF. 0-1/16W
R3014	06E36464S01	RES,CF. 0-1/16W
R3015	06E40187S01	RES,CF. 1K-1/16
R3016	06E40187S01	RES,CF. 1K-1/16
R3017	06E40187S01	RES,CF. 1K-1/16
R3018	06E40187S01	RES,CF. 1K-1/16
R3301	06E32037S01	RES,CF. 120K-1/16W
R3302	06E36618S01	RES,CF. 1K-1/16W
R3303	06E36618S01	RES,CF. 1K-1/16W
R3304	06E36618S01	RES,CF. 1K-1/16W
R3305	06E36463S01	RES,CF. 10K-1/16W
R3306	06E36463S01	RES,CF. 10K-1/16W
R3307	06E26239S01	RES,CF. 10K-1/4W
R3308	06E26239S01	RES,CF. 10K-1/4W
R3309	06E26239S01	RES,CF. 10K-1/4W
R3310	06E26239S01	RES,CF. 10K-1/4W
R3311	06E36559S01	RES,CF. 47K-1/16W
R3601	06E36464S01	RES,CF. 0-1/16W
R3602	06E36663S01	RES,CF. 56K-1/16W
R3603	06E36586S01	RES,CF. 22K-1/16W
R3701	06E40309S01	RES,CF. 22-1/8W
R3702	06E40309S01	RES,CF. 22-1/8W
R3703	06E40331S01	RES,CF. 4.7-1/16W
R3704	06E40331S01	RES,CF. 4.7-1/16W
R3705	06E40309S01	RES,CF. 22-1/8W
R3706	06E40309S01	RES,CF. 22-1/8W
R3707	06E40309S01	RES,CF. 22-1/8W
R3708	06E40309S01	RES,CF. 22-1/8W
R3709	06E40331S01	RES,CF. 4.7-1/16W
R3710	06E40331S01	RES,CF. 4.7-1/16W
R3711	06E40309S01	RES,CF. 22-1/8W
R3712	06E40309S01	RES,CF. 22-1/8W
R4001	06E36598S01	RES,MO. 10-3W
R4002	06E36598S01	RES,MO. 10-3W
R4003	06E36598S01	RES,MO. 10-3W
R4004	06E36598S01	RES,MO. 10-3W
R4101	06E40192S01	RES,CF. 22K-1/16
R4102	06E40317S01	RES,CF. 3.9K-1/16W
R4103	06E40329S01	RES,CF. 120K-1/16W
R4104	06E40229S01	RES,CF. 1.5K-1/16W

R4105	06E40321S01	RES,CF. 10K-1/16W
R4106	06E33314S01	RES,CEMENT 0.01-5W
R4107	06E33314S01	RES,CEMENT 0.01-5W
R4108	06E40330S01	RES,CF. 150K-1/16W
R4109	06E37095S01	RES,CF. 1.2K-1/16W
R4110	06E36463S01	RES,CF. 10K-1/16W
R4111	06E35280S01	RES,CF. 39K-1/16W
R4112	06E37095S01	RES,CF. 1.2K-1/16W
R4113	06E35280S01	RES,CF. 39K-1/16W
R4114	06E36463S01	RES,CF. 10K-1/16W
R4115	06E36463S01	RES,CF. 10K-1/16W
R4901	06E36659S01	RES,CF. 15K-1/16W
R4902	06E36659S01	RES,CF. 15K-1/16W
R4903	06E36659S01	RES,CF. 15K-1/16W
R4904	06E36659S01	RES,CF. 15K-1/16W
R4905	06E36622S01	RES,CF. 100K-1/16W
R5001	06E40327S01	RES,CF. 56K-1/16W
R5002	06E40323S01	RES,CF. 20K-1/16W
R5003	06E40312S01	RES,CF. 470-1/16W
R5004	06E36463S01	RES,CF. 10K-1/16W
R5005	06E40317S01	RES,CF. 3.9K-1/16W
R5006	06E40318S01	RES,CF. 5.6K-1/16W
R5007	06E40312S01	RES,CF. 470-1/16W
R5008	06E36463S01	RES,CF. 10K-1/16W
R5009	06E36464S01	RES,CF. 0-1/16W
R5010	06E36463S01	RES,CF. 10K-1/16W
R5012	06E36463S01	RES,CF. 10K-1/16W
R5013	06E40188S01	RES,CF. 330-1/16
R5014	06E40189S01	RES,CF. 15K-1/16
R5015	06E36463S01	RES,CF. 10K-1/16W
R5016	06E40322S01	RES,CF. 18K-1/16W
R5017	06E36463S01	RES,CF. 10K-1/16W
R5018	06E40321S01	RES,CF. 10K-1/16W
R5019	06E40315S01	RES,CF. 1.2K-1/16W
R8001	06E31153S01	RES,CF. 2.2K-1/16W
R8002	06E31153S01	RES,CF. 2.2K-1/16W
R8003	06E31064S01	RES,CF. 620-1/10W
R8004	06E31064S01	RES,CF. 620-1/10W
R8005	06E31064S01	RES,CF. 620-1/10W
R8006	06E31064S01	RES,CF. 620-1/10W
R8007	06E23572S01	RES,CF. 820-1/10W
R8008	06E23572S01	RES,CF. 820-1/10W
R9001	06E37280S01	RES,CF. 10-1/4W
R9002	06E37280S01	RES,CF. 10-1/4W
R9003	06E37280S01	RES,CF. 10-1/4W
R9004	06E37280S01	RES,CF. 10-1/4W
R9101	06E36581S01	RES,CF. 30K-1/4W
R9102	06E36588S01	RES,CF. 30K-1/16W
R9103	06E36559S01	RES,CF. 47K-1/16W
R9104	06E26239S01	RES,CF. 10K-1/4W
R9201	06E36463S01	RES,CF. 10K-1/16W
R9202	06E36580S01	RES,CF. 2.2K-1/4W
R9203	06E36463S01	RES,CF. 10K-1/16W
R9204	06E36559S01	RES,CF. 47K-1/16W
R9205	06E36580S01	RES,CF. 2.2K-1/4W
R9206	06E36580S01	RES,CF. 2.2K-1/4W
R9207	06E36580S01	RES,CF. 2.2K-1/4W

R9208	06E20905S01	RES,CF. 0-1/10W
R9501	06E36462S01	RES,CF. 4.7K-1/16W
R9502	06E36463S01	RES,CF. 10K-1/16W
R9503	06E36559S01	RES,CF. 47K-1/16W
R9504	06E36559S01	RES,CF. 47K-1/16W
R9505	06E36559S01	RES,CF. 47K-1/16W
R9506	06E36463S01	RES,CF. 10K-1/16W
R9507	06E36559S01	RES,CF. 47K-1/16W
R9508	06E36559S01	RES,CF. 47K-1/16W
R9601	06E40320S01	RES,CF. 8.2K-1/16W
R9701	06E36462S01	RES,CF. 4.7K-1/16W
R9702	06E36584S01	RES,CF. 820-1/16W
R9703	06E31153S01	RES,CF. 2.2K-1/16W
R9704	06E40308S01	RES,CF. 22K-1/4W
R9705	06E40187S01	RES,CF. 1K-1/16
R9706	06E40313S01	RES,CF. 510-1/16W
R9707	06E36464S01	RES,CF. 0-1/16W
R9708	06E39637S01	RES,CF. 13K-1/4W
R9709	06E40310S01	RES,CF. 39-1/16W
R9710	06E22129S01	RES,CF.24K-1/10W
R9711	06E23743S01	RES,CF.240K-1/10W
R9712	06E40316S01	RES,CF. 2K-1/16W
R9713	06E37221S01	RES,CF. 1K-1/4W
R9714	06E37221S01	RES,CF. 1K-1/4W
R9715	06E20905S01	RES,CF. 0-1/10W
R9716	06E40307S01	RES,CF. 0-1/8W
R9901	06E37280S01	RES,CF. 10-1/4W
R9902	06E37280S01	RES,CF. 10-1/4W
R9903	06E37280S01	RES,CF. 10-1/4W
R9904	06E37280S01	RES,CF. 10-1/4W
R9905	06E36555S01	RES,CF. 33-1/4W
R9906	06E36555S01	RES,CF. 33-1/4W
R9907	06E36555S01	RES,CF. 33-1/4W
R9908	06E36555S01	RES,CF. 33-1/4W
R9909	06E36555S01	RES,CF. 33-1/4W
R9910	06E36555S01	RES,CF. 33-1/4W
R9911	06E36555S01	RES,CF. 33-1/4W
R9912	06E36555S01	RES,CF. 33-1/4W
R9913	06E40312S01	RES,CF. 470-1/16W
RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
RA5005	06E39855S01	RES,ARRAY. 10K-1/16W
T9001	24E40348S01	COIL,CHOKE 1.5uH
T9901	25E40349S01	TRANS,POWER
T9902	25E40350S01	TRANS,POWER
TH3801	48E40346S01	THERMISTOR,10K
TH3802	48E40346S01	THERMISTOR,10K
TH5001	48E39677S01	THERMISTOR,100K
TH9601	48E39677S01	THERMISTOR,100K
ZD3601	48E39875S01	DIODE,ZENER VDZ11B
ZD4901	48E39120S01	DIODE,ZENER HZK12A2L
ZD5002	48E39118S01	DIODE,ZENER HZK15-2L
ZD9001	48E38545S01	DIO,ZENER Z5W27V
ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
ZD9501	48E40336S01	DIODE,ZENER VDZ22B

ZD9502	48E40336S01	DIODE,ZENER VDZ22B
=====SUB P.W.Board		
C1002	08E37117S01	CAP,CER. 100pF/50V
C1003	08E37117S01	CAP,CER. 100pF/50V
C1004	08E37117S01	CAP,CER. 100pF/50V
C1005	08E37117S01	CAP,CER. 100pF/50V
C1006	08E36629S01	CAP,CER. 0.047uF/50V
C1007	08E36629S01	CAP,CER. 0.047uF/50V
C1008	08E36680S01	CAP,CER. 1000pF/50V
C1009	08E36680S01	CAP,CER. 1000pF/50V
C1010	08E36680S01	CAP,CER. 1000pF/50V
C1011	08E36680S01	CAP,CER. 1000pF/50V
C1012	08E36680S01	CAP,CER. 1000pF/50V
C1101	08E36680S01	CAP,CER. 1000pF/50V
C1102	08E36680S01	CAP,CER. 1000pF/50V
C1103	08E36680S01	CAP,CER. 1000pF/50V
C1104	08E36680S01	CAP,CER. 1000pF/50V
C1105	08E36472S01	CAP,CER. 0.1uF/50V
C1106	08E36472S01	CAP,CER. 0.1uF/50V
C1107	08E36472S01	CAP,CER. 0.1uF/50V
C1108	08E36472S01	CAP,CER. 0.1uF/50V
C1201	08E36675S01	CAP,CER. 33pF/50V
C1202	08E36675S01	CAP,CER. 33pF/50V
C1203	08E36675S01	CAP,CER. 33pF/50V
C1204	08E36675S01	CAP,CER. 33pF/50V
C1207	08E36675S01	CAP,CER. 33pF/50V
C1208	08E36675S01	CAP,CER. 33pF/50V
C1209	08E36472S01	CAP,CER. 0.1uF/50V
C1210	08E36472S01	CAP,CER. 0.1uF/50V
C1301	08E36472S01	CAP,CER. 0.1uF/50V
C1302	08E36472S01	CAP,CER. 0.1uF/50V
C1303	08E38086S01	CAP,CER. 10pF/50V
C1501	08E38082S01	CAP,FILM 0.068uF/50V
C1502	08E38083S01	CAP,FILM 0.047uF/50V
C1503	08E39649S01	CAP,CER. 47pF/50V
C1504	08E39649S01	CAP,CER. 47pF/50V
C1505	08E38084S01	CAP,FILM 0.15uF/50V
C1506	08E38087S01	CAP,FILM 0.18uF/50V
C1507	08E36472S01	CAP,CER. 0.1uF/50V
C1508	08E36472S01	CAP,CER. 0.1uF/50V
C1601	08E38081S01	CAP,MYL. 0.56uF/50V
C1602	08E38081S01	CAP,MYL. 0.56uF/50V
C1603	08E38081S01	CAP,MYL. 0.56uF/50V
C1604	08E38081S01	CAP,MYL. 0.56uF/50V
C1605	08E38081S01	CAP,MYL. 0.56uF/50V
C1606	08E38081S01	CAP,MYL. 0.56uF/50V
C1607	08E38081S01	CAP,MYL. 0.56uF/50V
C1608	08E38081S01	CAP,MYL. 0.56uF/50V
C1609	08E37117S01	CAP,CER. 100pF/50V
C1610	08E37117S01	CAP,CER. 100pF/50V
C1611	08E37117S01	CAP,CER. 100pF/50V
C1612	08E37117S01	CAP,CER. 100pF/50V
C1613	08E36472S01	CAP,CER. 0.1uF/50V
C1614	08E36472S01	CAP,CER. 0.1uF/50V
C1615	08E36472S01	CAP,CER. 0.1uF/50V
C1616	08E36472S01	CAP,CER. 0.1uF/50V


C1801	08E38082S01	CAP,FILM 0.068uF/50V
C1802	08E38084S01	CAP,FILM 0.15uF/50V
C1803	08E39649S01	CAP,CER. 47pF/50V
C1804	08E36472S01	CAP,CER. 0.1uF/50V
C1805	08E36472S01	CAP,CER. 0.1uF/50V
CB4401	09E40351S01	CONN,WTB 10P
D1101	48E38037S01	DIODE,1PS226
D1102	48E38037S01	DIODE,1PS226
D1103	48E38037S01	DIODE,1PS226
D1104	48E38037S01	DIODE,1PS226
E1001	23E38004S01	CAP,ELY. 10uF/50V
E1002	23E38004S01	CAP,ELY. 10uF/50V
E1101	23E38019S01	CAP,ELY. 47uF/16V
E1102	23E38019S01	CAP,ELY. 47uF/16V
E1103	23E38019S01	CAP,ELY. 47uF/16V
E1104	23E38019S01	CAP,ELY. 47uF/16V
E1201	23E38004S01	CAP,ELY. 10uF/50V
E1202	23E38004S01	CAP,ELY. 10uF/50V
E1203	23E38004S01	CAP,ELY. 10uF/50V
E1204	23E38004S01	CAP,ELY. 10uF/50V
E9351	23E38000S01	CAP,ELY. 1uF/50V
E9352	23E38000S01	CAP,ELY. 1uF/50V
IC1001	51E36634S01	IC,NJM4580V
IC1101	51E36634S01	IC,NJM4580V
IC1102	51E36634S01	IC,NJM4580V
IC1201	51E36634S01	IC,NJM4580V
IC1301	51E22130S01	IC,NJM4560M
IC1501	51E22130S01	IC,NJM4560M
IC1601	51E22130S01	IC,NJM4560M
IC1602	51E22130S01	IC,NJM4560M
IC1801	51E36634S01	IC,NJM4580V
IC4151	51E39598S01	IC,BA4560RFVM
IC4152	51E39598S01	IC,BA4560RFVM
Q4151	48E39389S01	TR,KTC2875
Q4153	48E39389S01	TR,KTC2875
Q4154	48E22555S01	TR,DTC144EK
Q4155	48E22555S01	TR,DTC144EK
Q4156	48E38062S01	TR,DTA114EK
Q4157	48E38062S01	TR,DTA114EK
R1001	06E28786S01	RES,CF. 330-1/16W
R1002	06E28786S01	RES,CF. 330-1/16W
R1003	06E36618S01	RES,CF. 1K-1/16W
R1004	06E36618S01	RES,CF. 1K-1/16W
R1005	06E36618S01	RES,CF. 1K-1/16W
R1006	06E36618S01	RES,CF. 1K-1/16W
R1007	06E36622S01	RES,CF. 100K-1/16W
R1008	06E36622S01	RES,CF. 100K-1/16W
R1101	06E40315S01	RES,CF. 1.2K-1/16W
R1102	06E40315S01	RES,CF. 1.2K-1/16W
R1103	06E40187S01	RES,CF. 1K-1/16
R1104	06E40187S01	RES,CF. 1K-1/16
R1105	06E40311S01	RES,CF. 120-1/16W
R1106	06E40311S01	RES,CF. 120-1/16W
R1107	06E40328S01	RES,CF. 100K-1/16W
R1108	06E40328S01	RES,CF. 100K-1/16W
R1109	06E40325S01	RES,CF. 39K-1/16W
R1110	06E40325S01	RES,CF. 39K-1/16W

R1111	06E40325S01	RES,CF. 39K-1/16W
R1112	06E40325S01	RES,CF. 39K-1/16W
R1113	06E31680S01	RES,CF. 680-1/16W
R1114	06E31680S01	RES,CF. 680-1/16W
R1115	06E31680S01	RES,CF. 680-1/16W
R1116	06E31680S01	RES,CF. 680-1/16W
R1201	06E40196S01	RES,CF. 18K-1/8W
R1202	06E40196S01	RES,CF. 18K-1/8W
R1203	06E40196S01	RES,CF. 18K-1/8W
R1204	06E40196S01	RES,CF. 18K-1/8W
R1205	06E40196S01	RES,CF. 18K-1/8W
R1206	06E40196S01	RES,CF. 18K-1/8W
R1207	06E40196S01	RES,CF. 18K-1/8W
R1208	06E40196S01	RES,CF. 18K-1/8W
R1301	06E40319S01	RES,CF. 6.2K-1/16W
R1302	06E40319S01	RES,CF. 6.2K-1/16W
R1303	06E40326S01	RES,CF. 43K-1/16W
R1304	06E40326S01	RES,CF. 43K-1/16W
R1305	06E36663S01	RES,CF. 56K-1/16W
R1306	06E36559S01	RES,CF. 47K-1/16W
R1307	06E36623S01	RES,CF. 1M-1/16W
R1308	06E40317S01	RES,CF. 3.9K-1/16W
R1309	06E40318S01	RES,CF. 5.6K-1/16W
R1310	06E40314S01	RES,CF. 1.1K-1/16W
R1501	06E36658S01	RES,CF. 8.2K-1/16W
R1502	06E36658S01	RES,CF. 8.2K-1/16W
R1503	06E36658S01	RES,CF. 8.2K-1/16W
R1504	06E36658S01	RES,CF. 8.2K-1/16W
R1603	06E36621S01	RES,CF. 6.8K-1/16W
R1604	06E36659S01	RES,CF. 15K-1/16W
R1605	06E32212S01	RES,CF. 13K-1/16W
R1606	06E36660S01	RES,CF. 20K-1/16W
R1607	06E31681S01	RES,CF. 36K-1/16W
R1608	06E37246S01	RES,CF. 27K-1/16W
R1609	06E33277S01	RES,CF. 4.3K-1/16W
R1610	06E28791S01	RES,CF. 9.1K-1/16W
R1801	06E40187S01	RES,CF. 1K-1/16
R1802	06E40324S01	RES,CF. 27K-1/16W
R1803	06E36620S01	RES,CF. 3.3K-1/16W
R1804	06E36620S01	RES,CF. 3.3K-1/16W
R1805	06E40324S01	RES,CF. 27K-1/16W
R1806	06E40324S01	RES,CF. 27K-1/16W
R1807	06E36461S01	RES,CF. 510-1/16W
R4151	06E36618S01	RES,CF. 1K-1/16W
R4152	06E36618S01	RES,CF. 1K-1/16W
R4153	06E36618S01	RES,CF. 1K-1/16W
R4154	06E36618S01	RES,CF. 1K-1/16W
R4155	06E36618S01	RES,CF. 1K-1/16W
R4156	06E36618S01	RES,CF. 1K-1/16W
R4157	06E36622S01	RES,CF. 100K-1/16W
R4158	06E36622S01	RES,CF. 100K-1/16W
R4159	06E36622S01	RES,CF. 100K-1/16W
R4160	06E36622S01	RES,CF. 100K-1/16W
R4161	06E36558S01	RES,CF. 2K-1/16W
R4162	06E28786S01	RES,CF. 330-1/16W
R4163	06E28786S01	RES,CF. 330-1/16W
R4164	06E36584S01	RES,CF. 820-1/16W

R4165	06E36618S01	RES,CF. 1K-1/16W
R4166	06E36618S01	RES,CF. 1K-1/16W
R4167	06E36618S01	RES,CF. 1K-1/16W
R4168	06E36462S01	RES,CF. 4.7K-1/16W
R4169	06E36462S01	RES,CF. 4.7K-1/16W
SW1301	40E39894S01	SW,SLIDE SSSF022
SW1601	40E39707S01	SW,SLIDE SSAF023NB
Z1001	91E39228S01	FIL,EMI CM-2M3216-47
Z1002	91E39228S01	FIL,EMI CM-2M3216-47
ZD4151	48E38024S01	DIODE,ZENER HZS5BLL
ZD4152	48E38024S01	DIODE,ZENER HZS5BLL
=====LED P.W.Board		
C8004	08E36472S01	CAP,CER. 0.1uF/50V
CH8001	09E33654S01	ASSY,CONN 2P
LD8004	48E39343S01	LED,BLU UB1106W
R8009	06E31064S01	RES,CF. 620-1/10W
R8010	06E31064S01	RES,CF. 620-1/10W
=====Miscellaneous		
CB4201	09E40352S01	CONN,WTB 2P
F001	65E25313S01	FUSE,AUTO 20A
F002	65E25313S01	FUSE,AUTO 20A
F003	65E25313S01	FUSE,AUTO 20A
F004	65E25313S01	FUSE,AUTO 20A
HL9001	09E39445S01	HOLDER,FUSE
HL9002	09E39445S01	HOLDER,FUSE
JK1001	09E39714S01	RCA,JACK 2P-4P
JK1002	09E39714S01	RCA,JACK 2P-4P
TML9001	29E39747S01	TERMINAL,JSZ3-36GDBH
VOL1301	18E39900S01	VR,50K
VOL1501	18E39709S01	VR,20K

Exploded View (Cabinet)

PDX-1.600

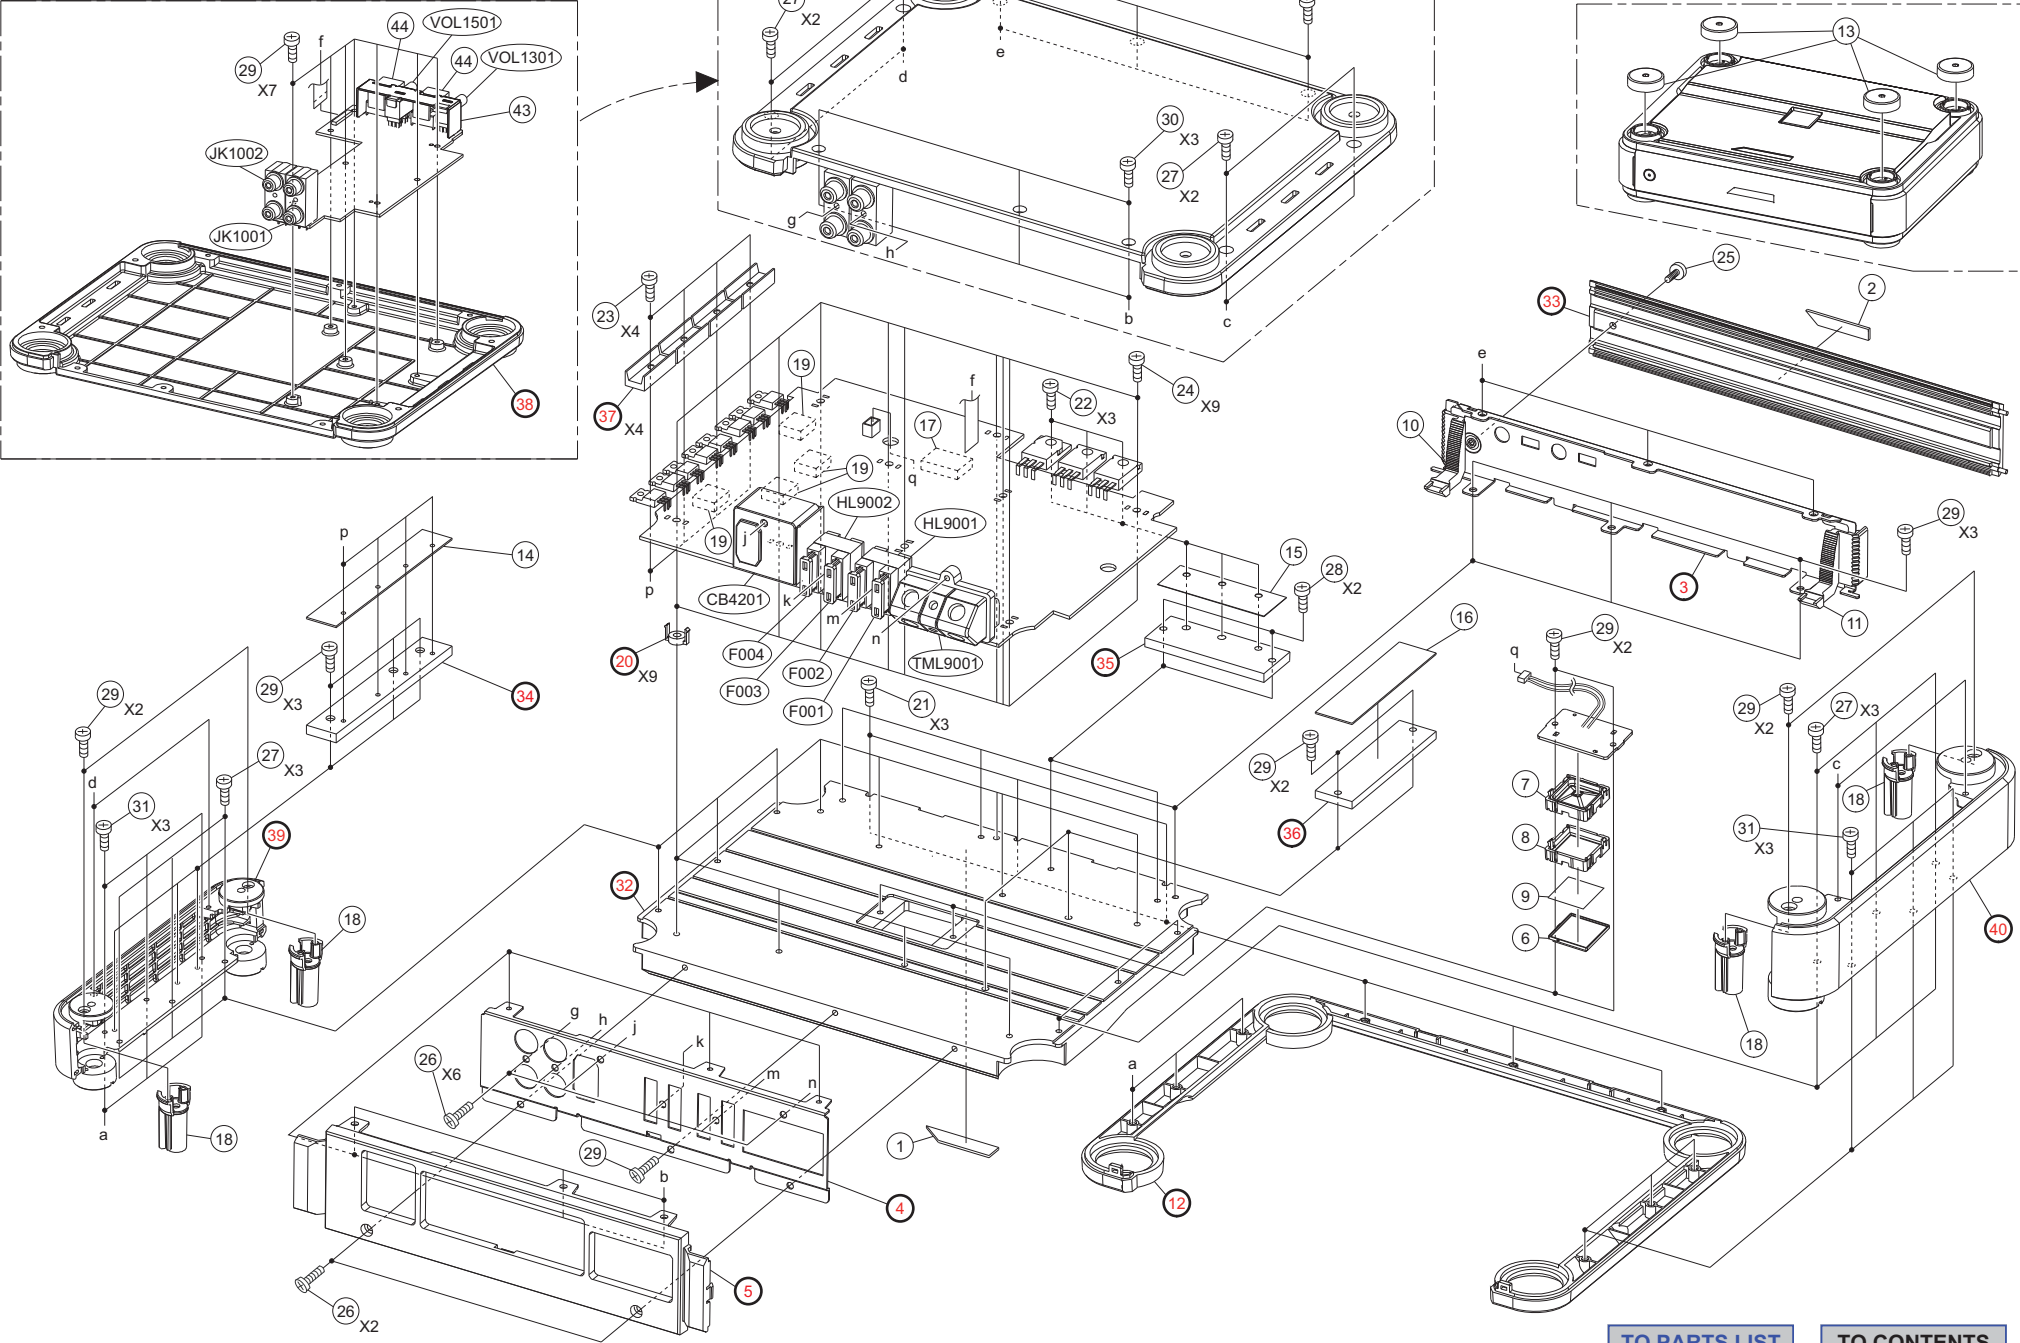

[TO PARTS LIST](#)

[TO CONTENTS](#)

Cabinet Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

1	33E39157S01	PLATE,NAME
2	33E39669S01	PLATE,NAME-F
3	-----	CHAS;FRONT(M)
4	-----	CHAS;REAR(M)
5	-----	COVER;REAR(M)
6	61E39462S01	LENS,LED
7	61E39911S01	LENS,BASE
8	09E39674S01	HOLDER,LED
9	75E39683S01	SHEET,DIFFUSION
10	61E39464S01	LENS,FRONT-R
11	61E39465S01	LENS,FRONT-L
12	-----	PANEL;FACE-TOP
13	16E39454S01	CAP, TOP
14	14E39904S01	INSULATOR,SILPAD-A
15	14E39905S01	INSULATOR,SILPAD-B
16	14E39906S01	INSULATOR,GAPPAD-FET
17	14E39907S01	INSULATOR,GAPPAD-REG
18	15E39484S01	GUIDE,HOLDER
19	14E39909S01	INSULATOR,GAPPAD-OUTPUT
20	-----	SUPPORT;PWB
21	03E39676S01	SCR,M2.6X7(B)(BLK)
22	03E36210S01	SCR,M3X10(P)(WHT)
23	03E38670S01	SCR,M3X14(WS)(WHT)
24	03E39165S01	SCR,M3X11(WP)(WHT)
25	03E39505S01	SCR,M3X10(F)(BLK)
26	03E38698S01	SCR,M3X8(P)(BLK)
27	03E39512S01	SCR,M3X10(P)(WHT)
28	03E39167S01	SCR,M3X12(P)(BLK)
29	03E38671S01	SCR,M3X6(B)
30	03E39507S01	SCR,M2.6X8(B)(BLK)
31	03E40354S01	SCR,M2.6X8(TR)(BLK)
32	-----	HEAT;SINK-MAIN(M)
33	-----	COVER;DOOR(M)
34	-----	HEAT;SINK-SUB(A)
35	-----	HEAT;SINK-SUB(B)
36	-----	HEAT;SINK-SUB(E)
37	-----	HEAT;SINK BAR
38	-----	COVER;BOTTOM
39	-----	PANEL;SIDE(R)
40	-----	PANEL;SIDE(L)
43	07E39726S01	BKT,VOL-SUB
44	15E39790S01	COVER,S/W-ANGLE